


# PHC1601A SERIES (16CH \* 1 L)



龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

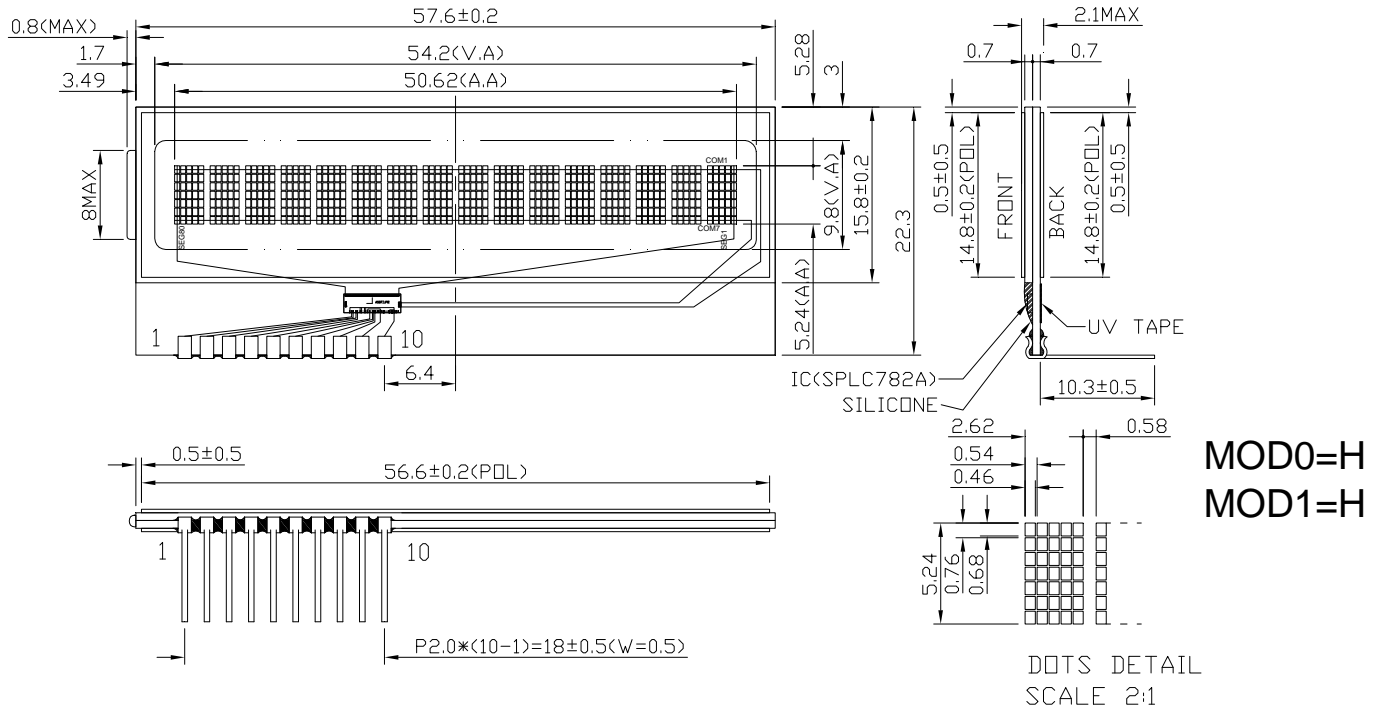

### NOTE:

- |   |  |
|---|--|
| 1 DISPLAY TYPE: FSTN                    | 6 OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ |
| 2 POLARIZER MODE: REFLECTIVE / POSITIVE | 7 STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$   |
| 3 VIEWING DIRECTION: 6:00               | 8 DRIVE IC: SPLC782A -063A (COG)                                 |
| 4 DRIVE METHOD: 1/8 DUTY, 1/4 BIAS      | 9 CONNECTOR: PIN   |
| 5 OPERATING VOLTAGE: 5.0V               | 10 GENERAL TOLERANCE: $\pm 0.2$                                  |

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	DB7	DB6	DB5	DB4	E	RW	RS	VPP	VDD	VSS