


PHC1602D SERIES (16CH * 2 L)



龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

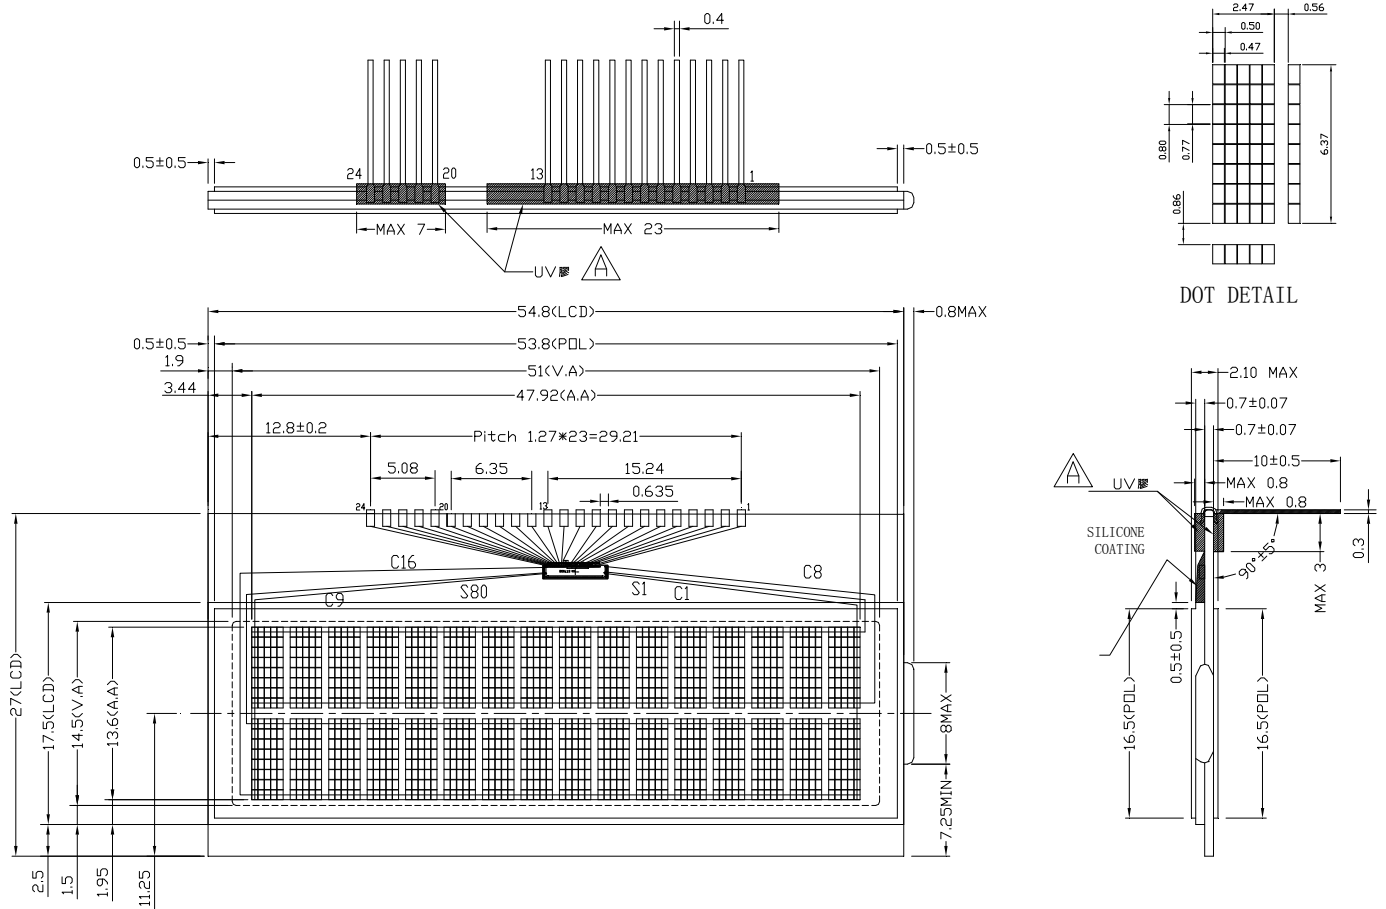

NOTE:

- | | |
|---|---------------------------------|
| 1 DISPLAY TYPE: FSTN | 6 OPERATING TEMP: -20°C ~ +70°C |
| 2 POLARIZER MODE: TRANFLECTIVE/POSITIVE | 7 STORAGE TEMP: -30°C ~ +80°C |
| 3 VIEWING DIRECTION: 12:00 | 8 IC:ST7032I(COG) |
| 4 DRIVE METHOD: 1/17 DUTY, 1/5 BIAS | 9 CONNECTOR:PIN |
| 5 OPERATING VOLTAGE: 5.0V(VDD=3.3V) | 10 GENERAL TOLERANCE:±0.2 |

PIN CONNECTIONS

<i>PIN NO</i>	1	2	3	4	5	6	7	8	9
<i>SYMBOL</i>	V0	C1-	C1+	PS12B	PSB	VOUT	VIN	VDD	SHLS
<i>PIN NO</i>	10	11	12~19		20	21	22	23	24
<i>SYMBOL</i>	SHLC	VSS	DB7~DB0		E	R/W	CSB	RS	RESET