PT0353224-A601
(320 * RGB * 240 DOTS)

龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

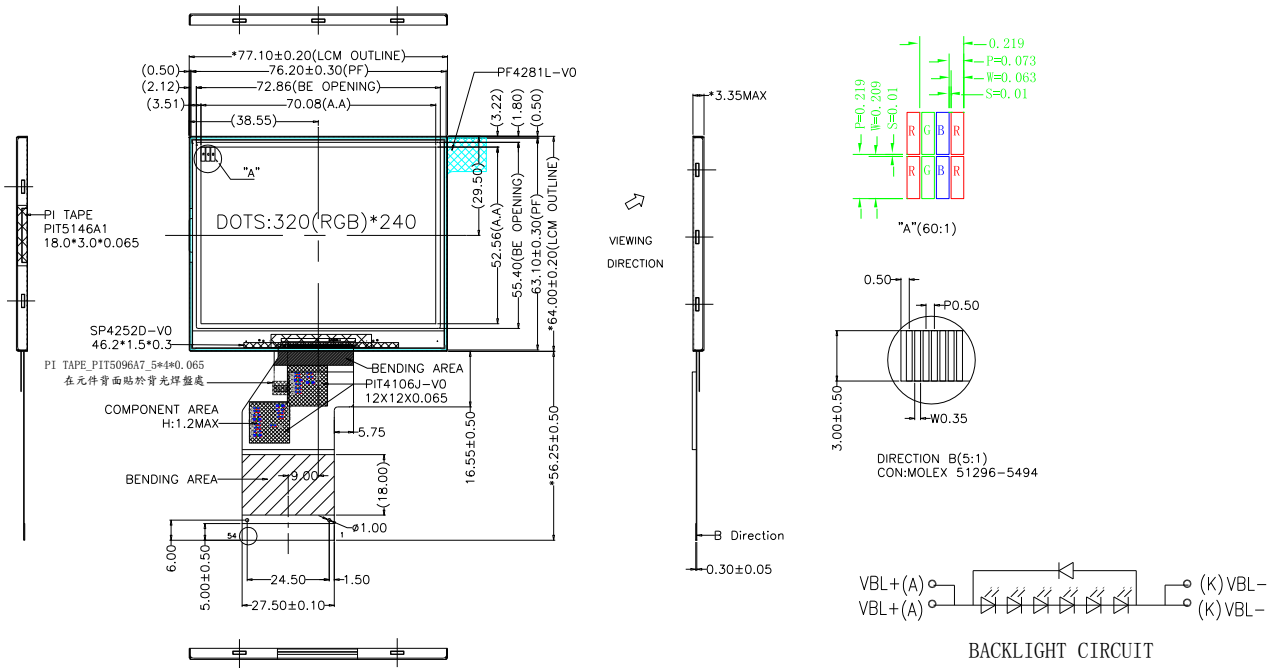

NOTES:

1. DISPLAY TYPE: 262K TFT-LCD, TRANSMISSIVE,POSITIVE
2. OPERATING TEMP: -20°C~70°C
3. STORAGE TEMP: -30°C~80°C
4. DRIVER IC: COG HX8238-A
5. GENERAL TOLERANCE: ±0.2
6. BACKLIGHT: 6 CHIP-WHITE LEDS SERIES
7. MARK * MEANS IMPORTANT DIMENSION
8. MARK 맗 MEANS MODIFICATION RECORD
9. ALL MATERIALS MUST BE BHS-001 COMPLIANT

PIN CONNECTIONS

PIN NO	1~2	3~4	5~7	8	9	10	11	12~19	20~27	28~35
SYMBOL	VBL-	VBL+	NC	/RESET	SPENA(nCS)	SPCLK(SCL)	SPDAT(SDI)	B0~B7	G0~G7	R0~R7
PIN NO	36	37	38	39~40	41~42	43~51		52	53	54
SYMBOL	HSYNC	VSYNC	DOLK(DOTCLK)	NC	VCC	NC		ENB(DEN)	GND	AVSS
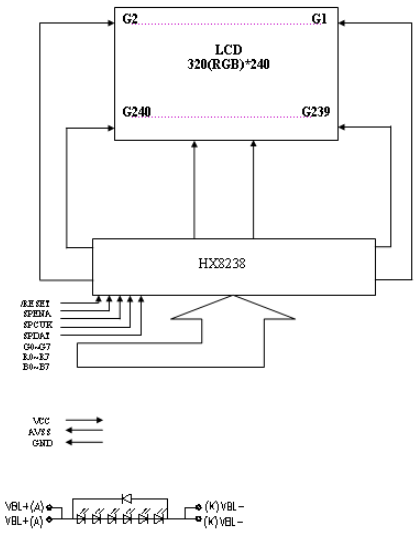
BLOCK DIAGRAM