



# PNG18 IW-SCLW (128 \* RGB \* 128 DOTS)




魔誼科技股份有限公司  
Palm Technology Co., Ltd



## EXTERNAL DIMENSION

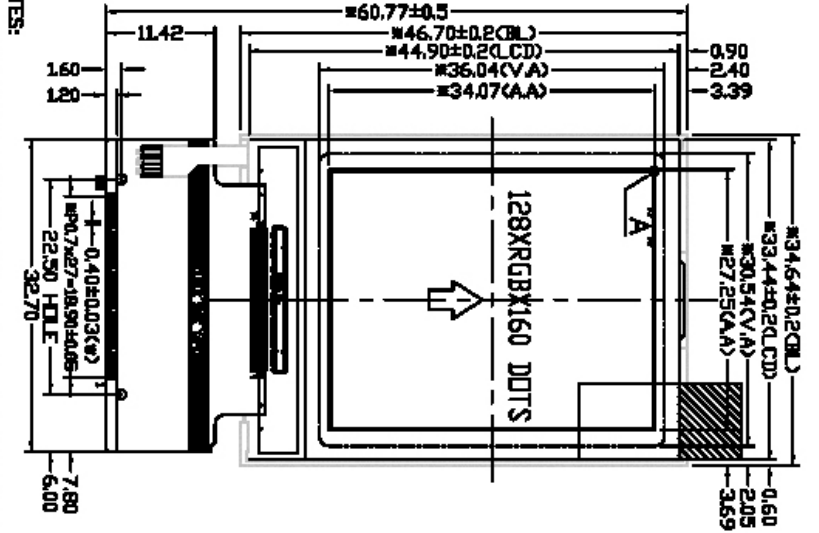

- NOTES:
1. DISPLAY TYPE: CSTN 6BIT COLOR / TRANSMISSIVE (LED 显示方式为快速液晶)
  2. FC: FPC4111W-V0
  3. Backlight: 2 Chip White LED (PARALLEL) EL ALUMINUM 2000cd/m<sup>2</sup>
  4. OPERATING TEMP: -20°C ~ 70°C
  5. STORAGE TEMP: -30°C ~ 80°C
  6. CONNECTOR: COG (C:2883339)
  7. GENERAL TOLERANCE: ±0.2, 符合IPC标准, \*为基准尺寸

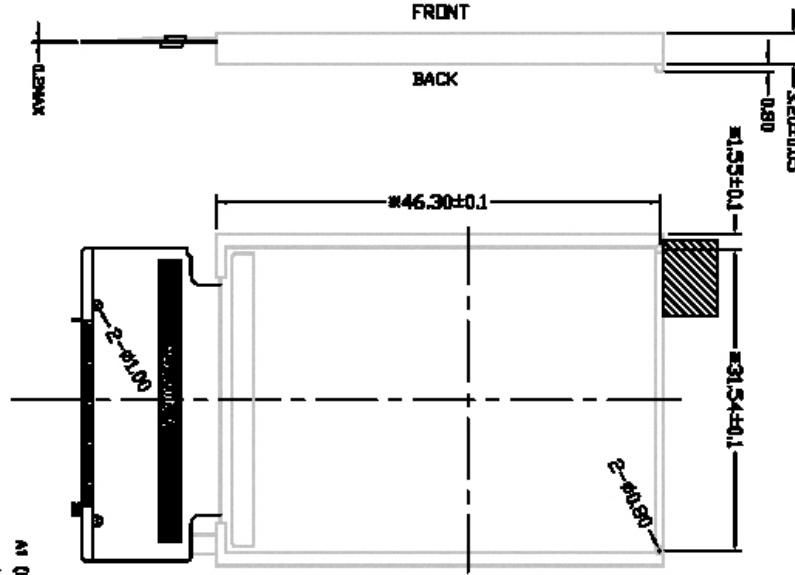

COLOR FILTER



1	GND
2	LCD_VDD
3	CSB
4	RESRET B
5	RS
6	WRB
7	RDB
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	DB8
17	DB9
18	DB10
19	DB11
20	DB12
21	DB13
22	DB14
23	DB15
24	DTPD
25	DTPG
26	LEDA1
27	LEDA2
28	LEDK