## EXTERNAL DIMENSION
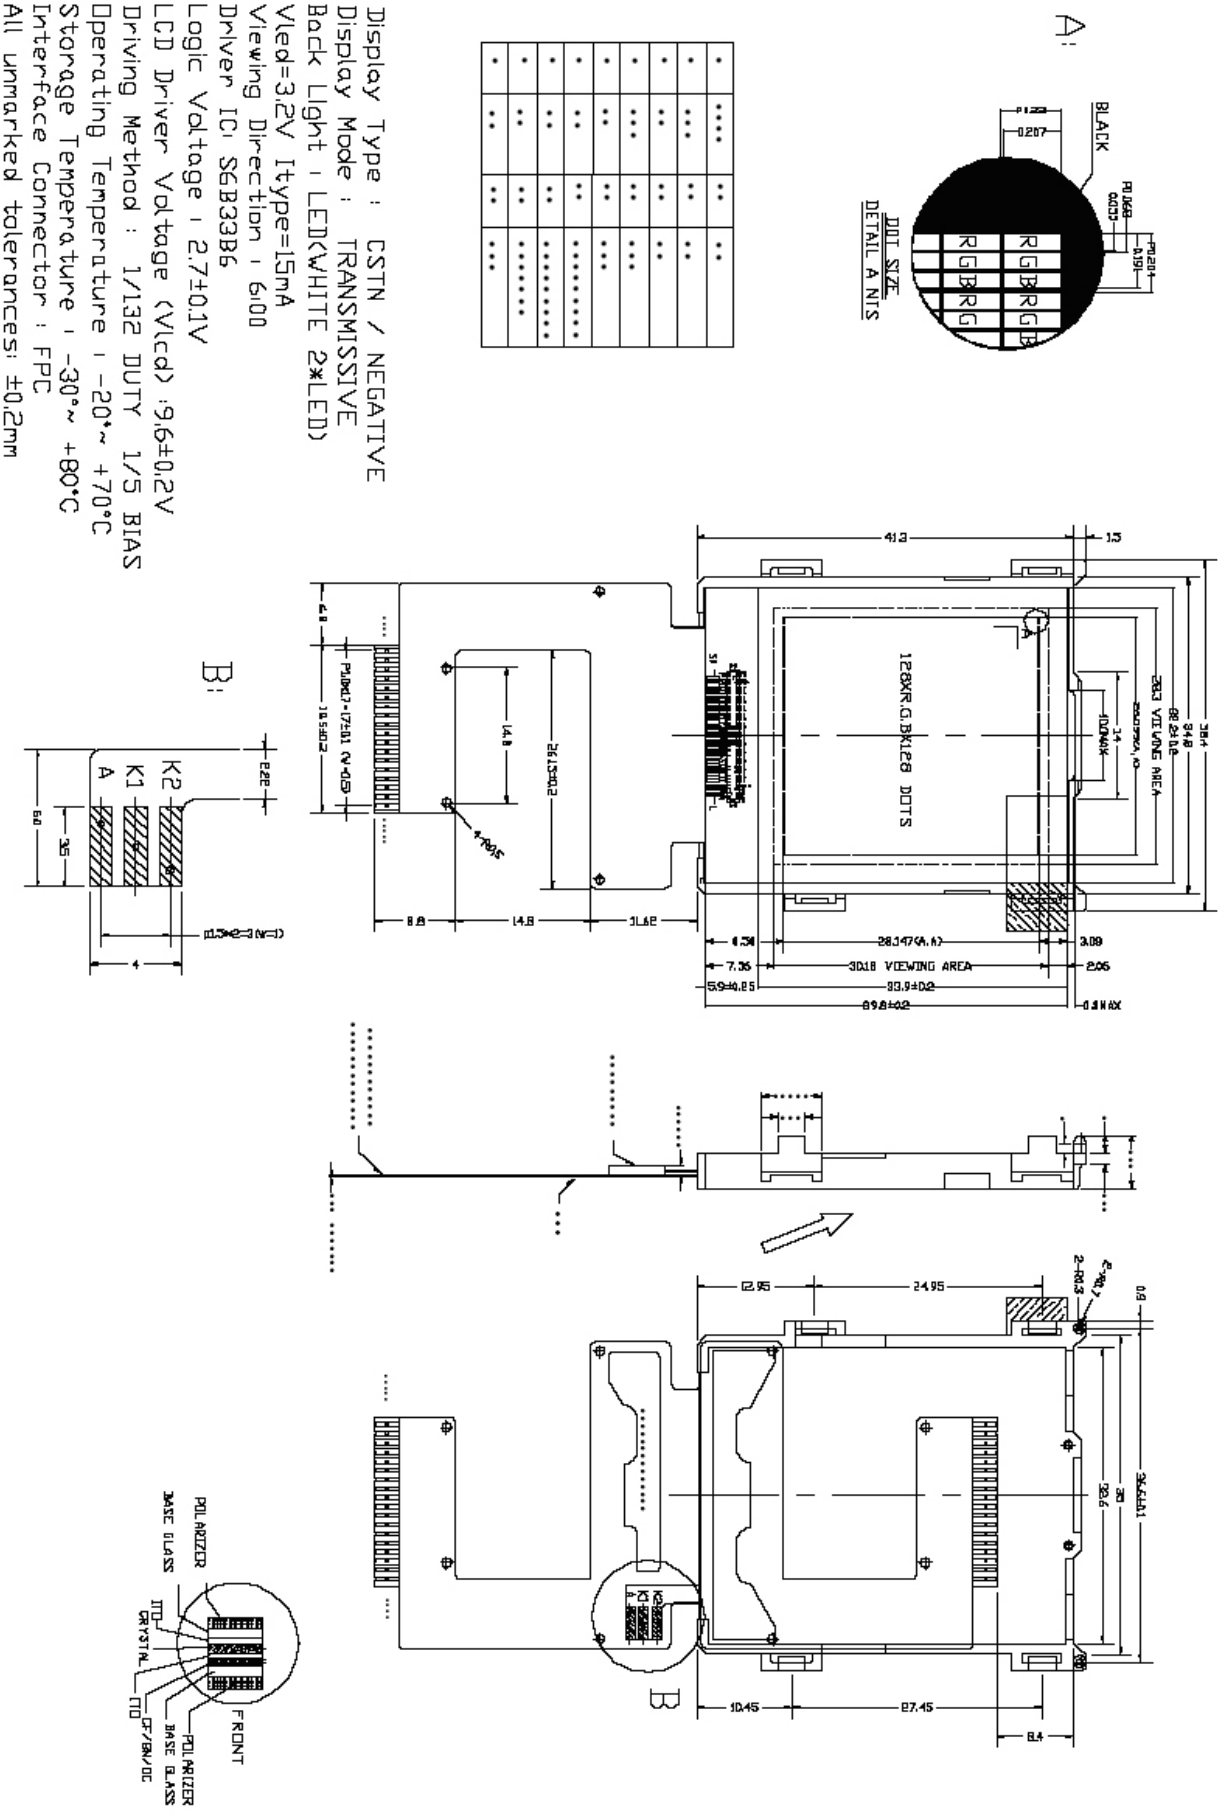
Display Type : CSTN / NEGATIVE
Display Mode : TRANSMISSIVE
Back Light : LED(WHITE 2*LED)
Vled=3.2V Itype=15mA
Viewing Direction : 6:00
Driver IC: SGB33B6
Logic Voltage : 2.7±0.1V
LCD Driver Voltage (Vlcd) :9.6±0.2V
Driving Method : 1/132 DUTY 1/5 BIAS
Operating Temperature : -20°~ +70°C
Storage Temperature : -30°~ +80°C
Interface Connector : FPC
All unmarked tolerances: ±0.2mm