


# PHG1206I SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

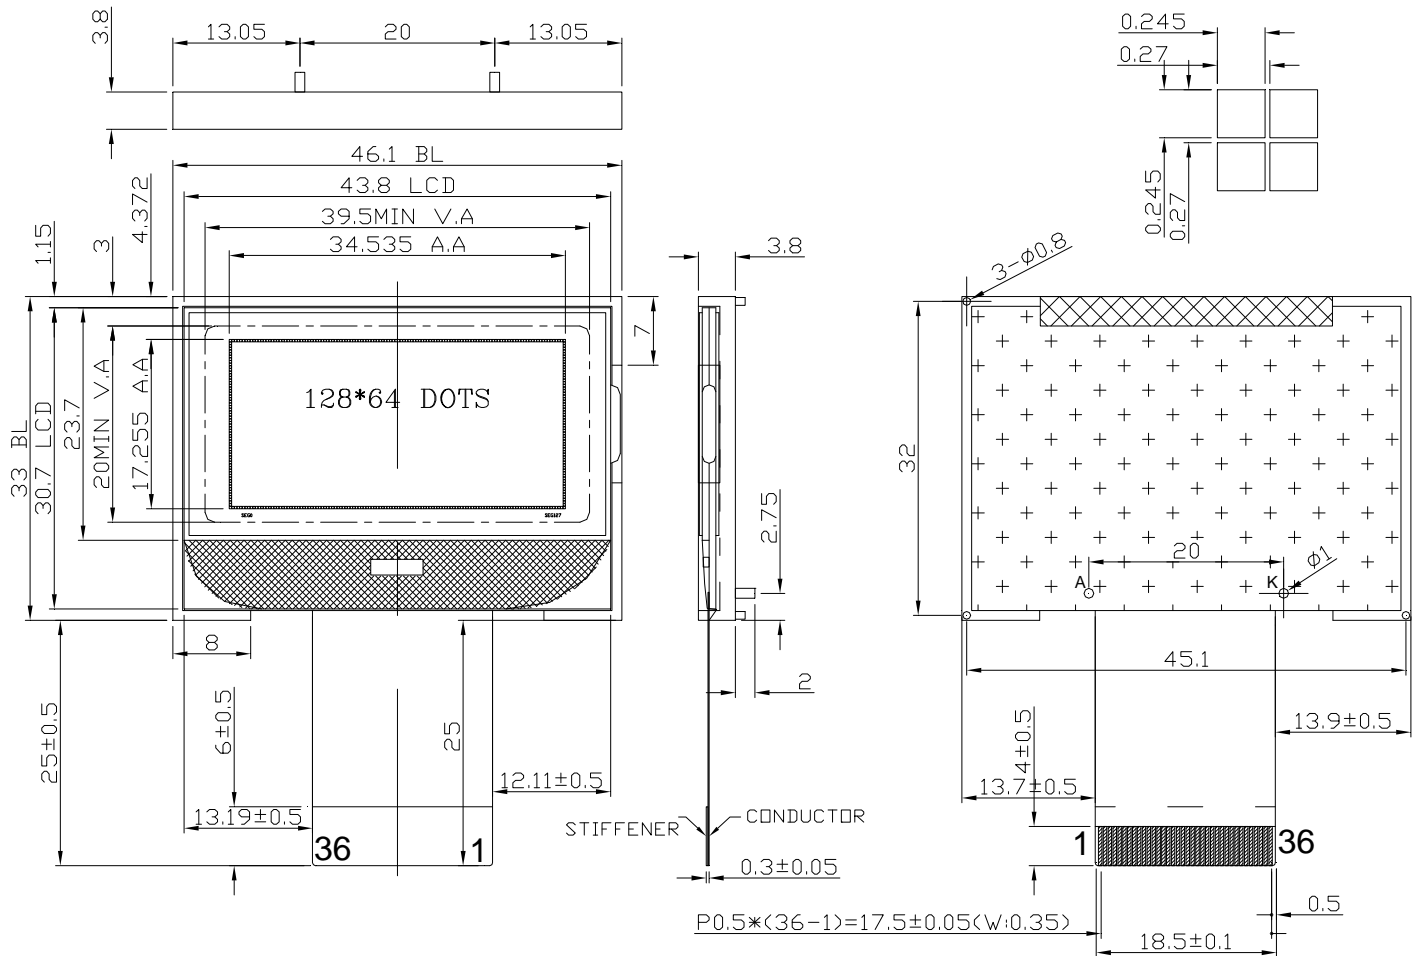

NOTE:

- 1 DISPLAY TYPE: FSTN
- 2 POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 3 VIEWING DIRECTION: 6:00
- 4 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 5 OPERATING VOLTAGE: 8.7V

- 6 OPERATING TEMP: -10°C ~ +60°C
- 7 STORAGE TEMP: -20°C ~ +70°C
- 8 DRIVE IC: ST7567(CDG)
- 9 CONNECTOR: FPC
- 10 BACKLIGHT: LED(White)(Vf=3.3V, If=60mA)
- 11 GENERAL TOLERANCE: ±0.2

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7~14	15
SYMBOL	CS1	NC	RST	A0	EWR	ERD	DB0~DB7	NC
PIN NO	16	17	18~23	24	25	26	27	28
SYMBOL	VDD	VSS	NC	V0	XV0	NC	VMO	NC
PIN NO	29	30	31	32	33	34	35	36
SYMBOL	VG	NC	NC	NC	C86	VSS	VDD	VSS