


PHG1206S1 SERIES (128 * 64 DOTS)



龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

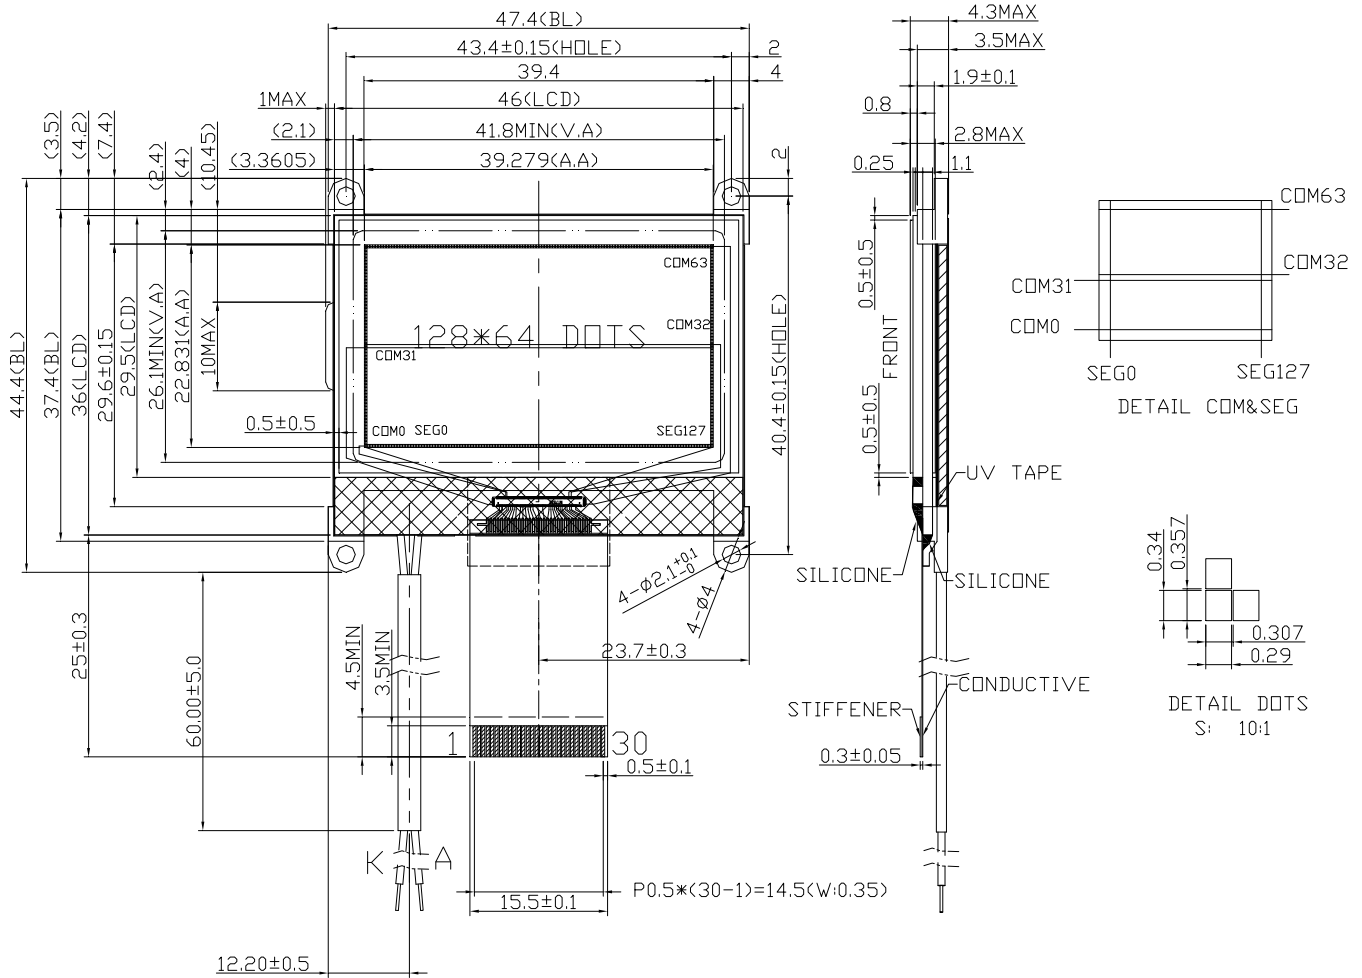

NOTE:

- | | |
|---|------------------------------------|
| 1 DISPLAY TYPE: FSTN | 6 VDD: 3.3V |
| 2 VIEWING DIRECTION: 6:00 | 7 OPERATING TEMP: -20°C--+60°C |
| 3 POLARIZER MODE: TRANFLECTIVE/POSITIVE | 8 STORAGE TEMP: -30°C--+70°C |
| 4 DRIVE METHOD: 1/65 DUTY 1/9BIAS | 9 CONTROLLER: NT7532H-BDT |
| 5 VDP: 9.0V | 10 CONNECTOR: FPC |
| 6 VDD: 3.3V | 11 BACKLIGHT: LED (RED) |
| | 12 ALL UNMARKED TOLERANCES: ±0.2mm |

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	IRS	PS	C86	VR	V0	V4	V3	V2	V1	CAP2-
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	CAP2+	CAP1+	CAP1-	CAP3+	VOUT	VSS	VDD	D7	D6	D5
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D4	D3	D2	D1	D0	/RD(E)	/WR(R/W)	A0	/RES	/CS1