EXTERNAL DIMENSION

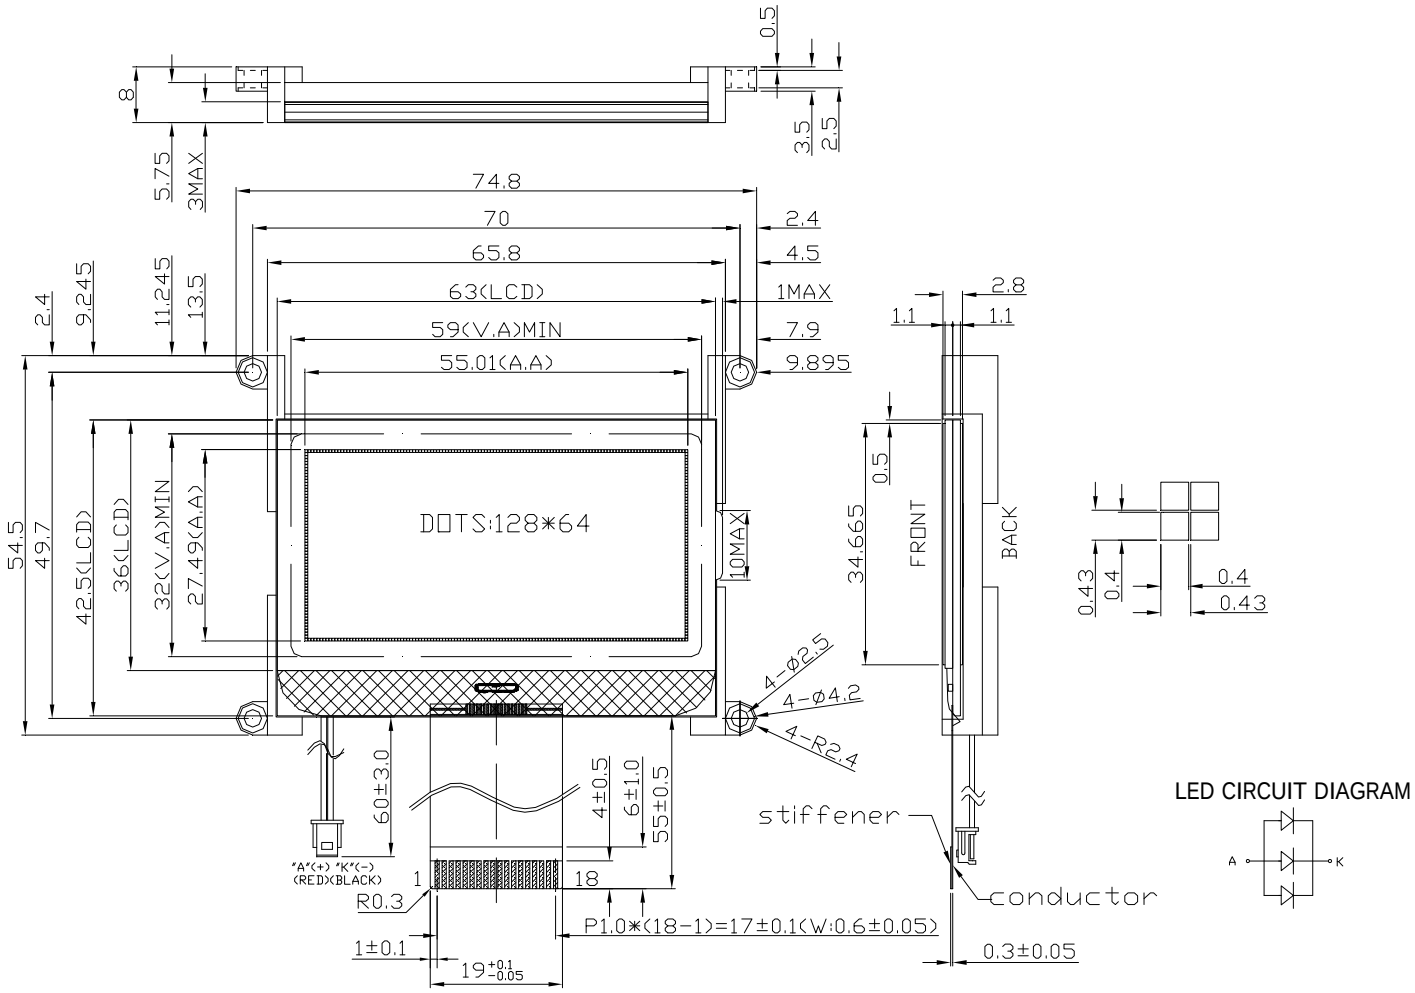

NOTE:

1 DISPLAY TYPE: STN(GRAY)
2 POLARIZER MODE: TRANSFLECTIVE/POSITIVE
3 VIEWING DIRECTION: 6:00
4 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
5 OPERATING VOLTAGE: 9.0V
6 OPERATING TEMP: -20°C ~ +70°C
7 STORAGE TEMP: -30°C ~ +80°C
8 DRIVE IC: ST7565R(COG)
9 CONNECTOR: FPC
10 BACKLIGHT: LED(WHITE) Vf=3.2V,If=45mA)
11 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3~7	8	9	10	11
SYMBOL	VDD	VSS	V0~V4	CAP2-	CAP2+	CAP1-	CAP1+
PIN NO	12	13	14	15	16	17	18
SYMBOL	CAP3+	VOUT	D7(SI)	D6(SCL)	RS(A0)	/RES	/CS1