EXTERNAL DIMENSION

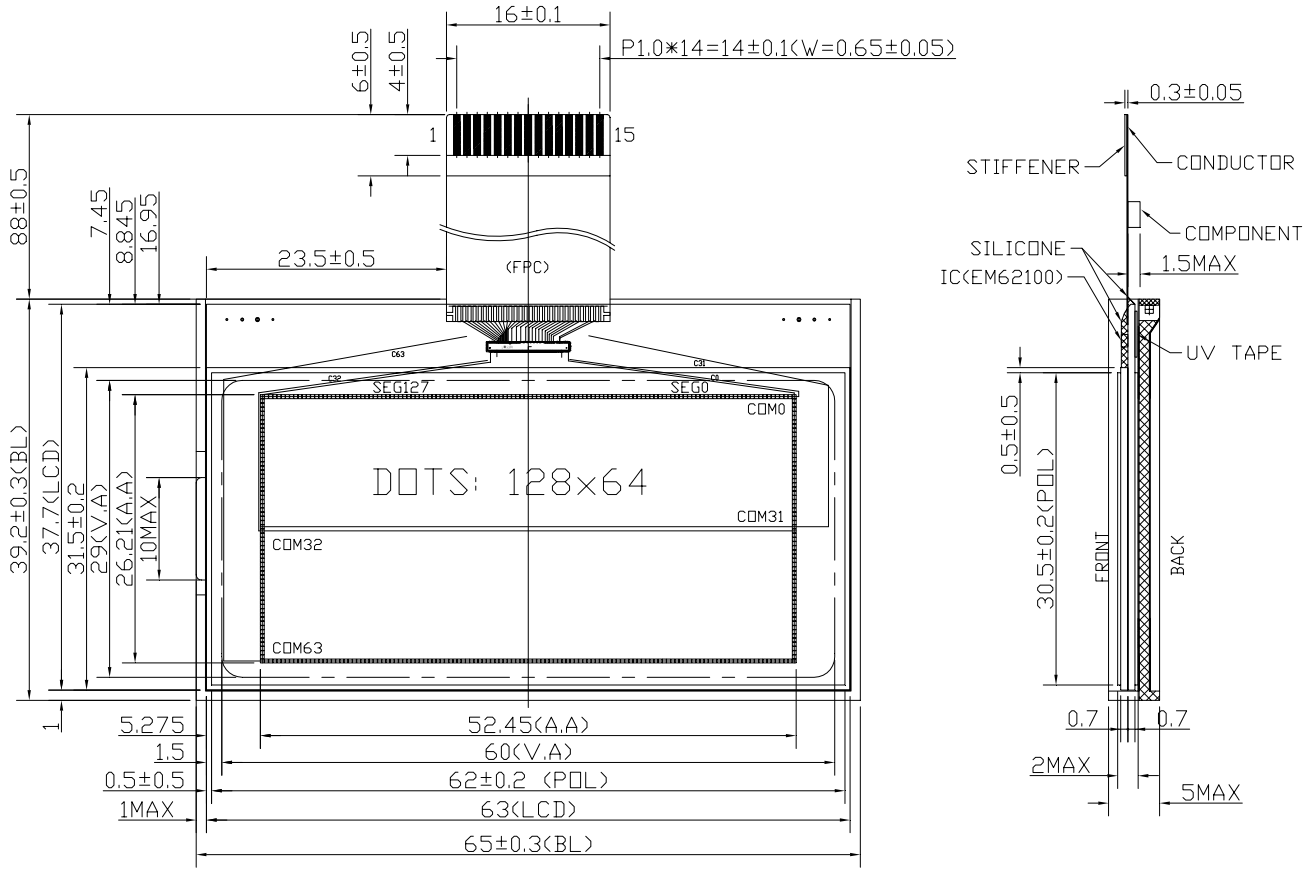

NOTE:

1 DISPLAY TYPE: STN(Y/G)
2 POLARIZER MODE: TRANSFLECTIVE/POSITIVE
3 VIEWING DIRECTION: 6:00
4 DRIVE METHOD: 1/64 DUTY, 1/9 BIAS
5 OPERATING VOLTAGE: 9.0V(VDD=2.8V~3.2V)
6 OPERATING TEMP: −20°C ~ +70°C
7 STORAGE TEMP: −30°C ~ +80°C
8 DRIVE IC: EM62100(COG)
9 CONNECTOR: FPC
10 BACKLIGHT: LED(Y/G)
11 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
SYMBOL	/CS1	/RES	A0	/WR	/RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	GND	VDD
PIN NO															
SYMBOL															