


PMGG1206B SERIES (128 * 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

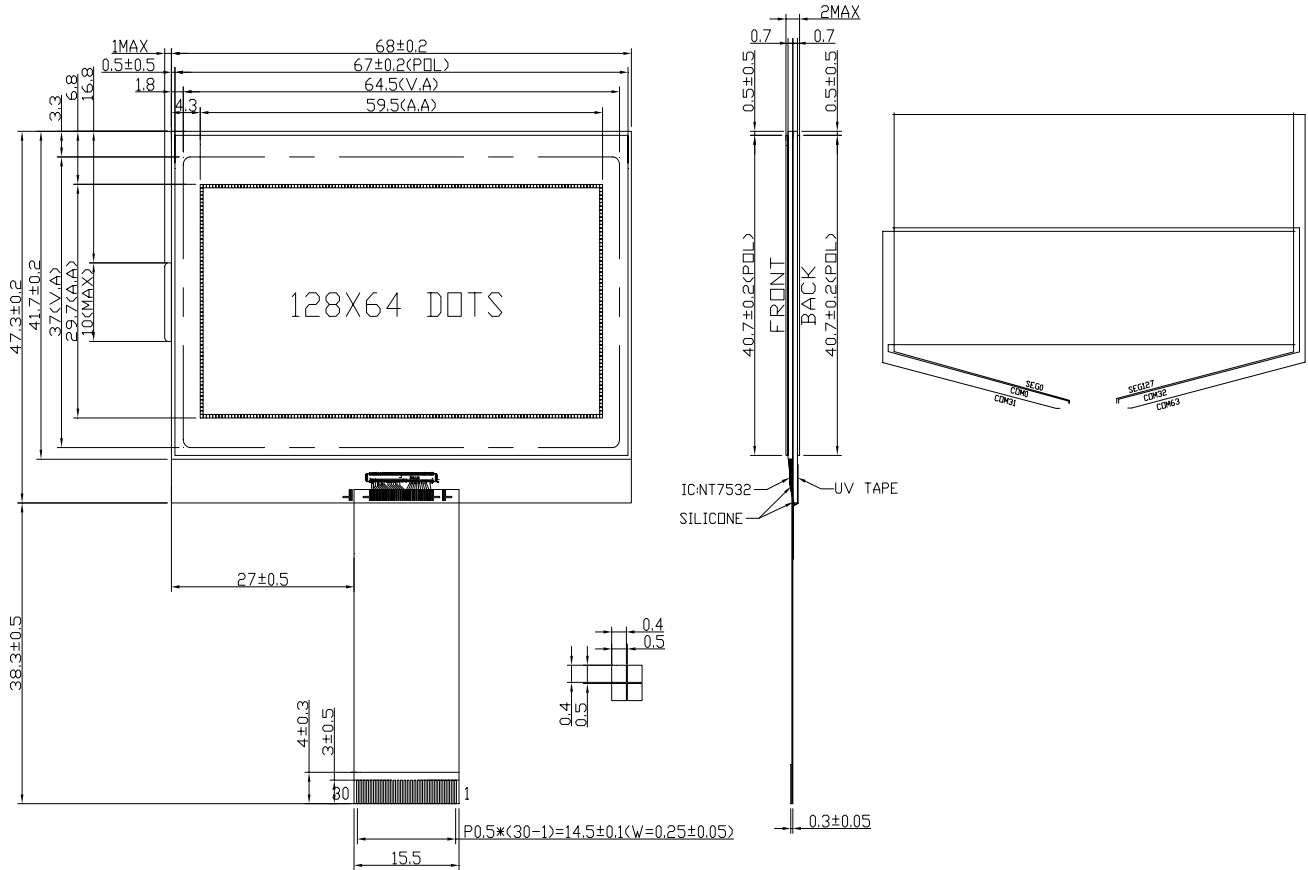

NOTE:

- 1 DISPLAY TYPE: STN(GRAY)
- 2 POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 3 VIEWING DIRECTION: 6:00
- 4 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 5 OPERATING VOLTAGE: 8.2V

- 6 OPERATING TEMP: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- 7 STORAGE TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 8 DRIVE IC: NT7532(COG)
- 9 CONNECTOR: FPC
- 10 GENERAL TOLERANCE: ± 0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
SYMBOL	CS1	RES	AO	MR	/RD	D0	D1	D2	D3	D4	D5	D6	D7	VSS	VOUT
PIN NO	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
SYMBOL	CAP3+	CAP1-	CAP1+	CAP2+	CAP2-	V1	V2	V3	V4	VO	VR	VDD	C86	P/S	IRS