




**EXTERNAL DIMENSION**

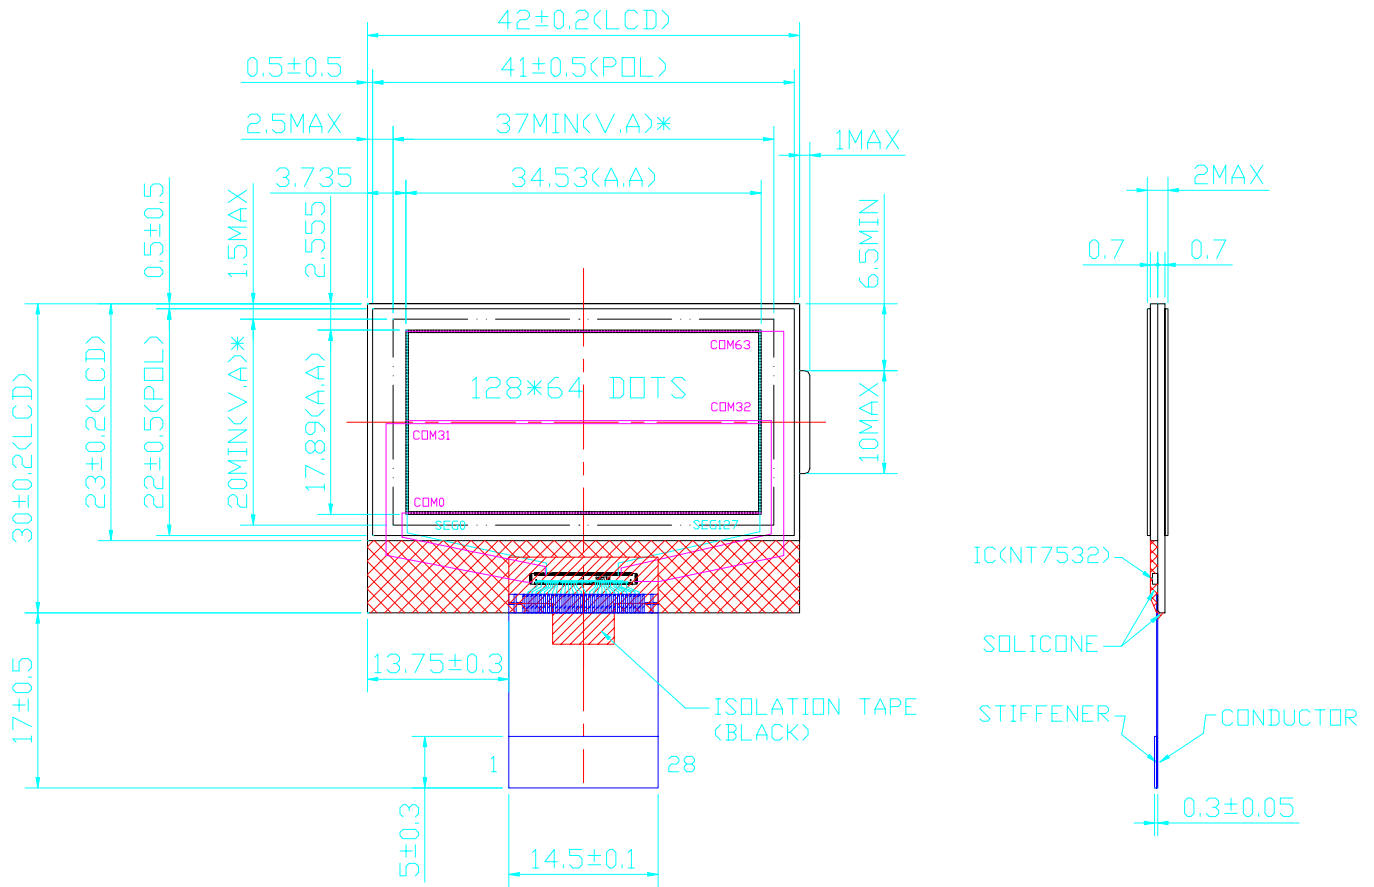

NOTE:

- |   |  |
|---|--|
| 1 DISPLAY TYPE: FSTN                    | 6 OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ |
| 2 POLARIZER MODE: TRANFLECTIVE/POSITIVE | 7 STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$   |
| 3 VIEWING DIRECTION: 6:00               | 8 DRIVE IC: NT7532(COG)  |
| 4 DRIVE METHOD: 1/65 DUTY, 1/6 BIAS     | 9 CONNECTOR: FPC   |
| 5 OPERATING VOLTAGE: 9.0V               | 10 GENERAL TOLERANCE: $\pm 0.2$                                  |

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SYMBOL	VDD	C86	VR	V0	V4	V3	V2	V1	CAP2-	CAP2+	CAP1+	CAP1-	CAP3+	VOUT
PIN NO	15	16	17	18	19	20	21	22	23	24	25	26	27	28
SYMBOL	VSS	D7	D6	D5	D4	D3	D2	D1	D0	/RD	/WR	A0	/RST	/CS1