


EXTERNAL DIMENSION

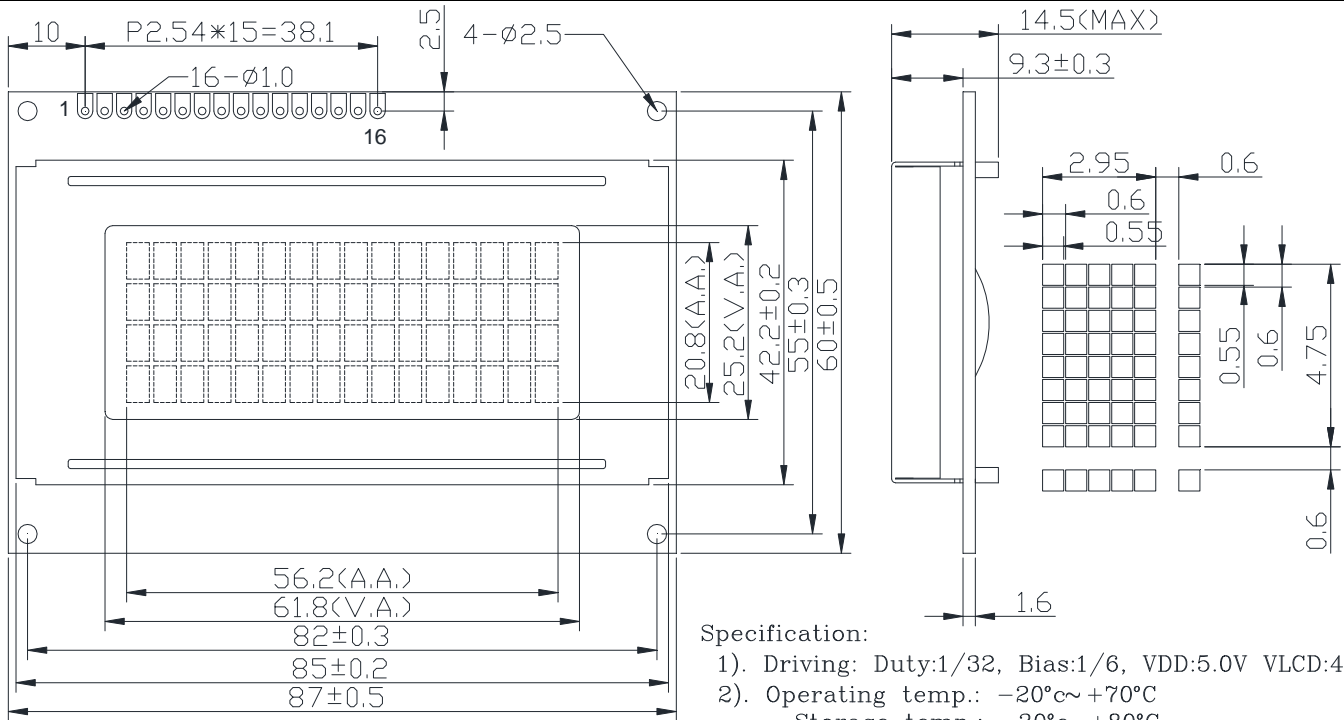

Specification:

- 1). Driving: Duty:1/32, Bias:1/6, VDD:5.0V VLCD:4.5V
- 2). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 3). Driver :ST7066U or equivalent controller.
- 4). Short circuit J3 and J4

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

BLOCK DIAGRAM

