


PQC1601A SERIES (16CH * 1L)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

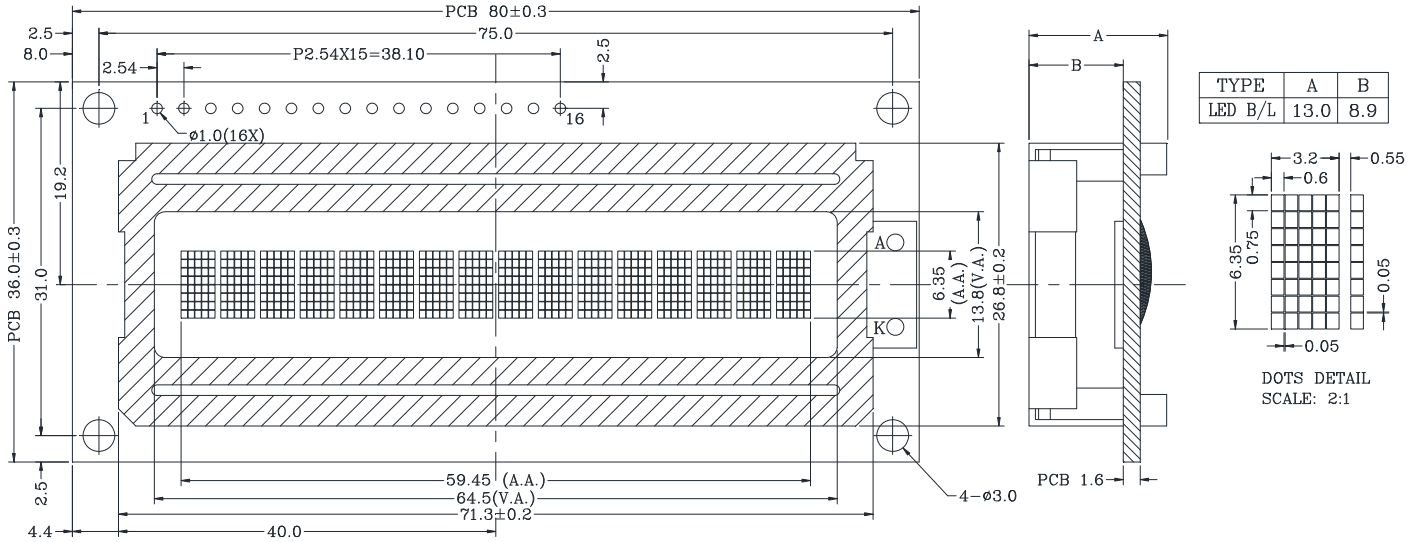

SPECIFICATIONS

1. LCD DRIVING VOLTAGE: 5.0V
2. LOGIC VOLTAGE: 5.0V
3. OPERATING TEMP: -1 °C~60°C
4. STORAGE TEMP: -20°C~70°C
5. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
6. OTHER:
MECHANICAL TOL.±0.2 UNLESS SPECIFIED

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

BLOCK DIAGRAM

