


**EXTERNAL DIMENSION**

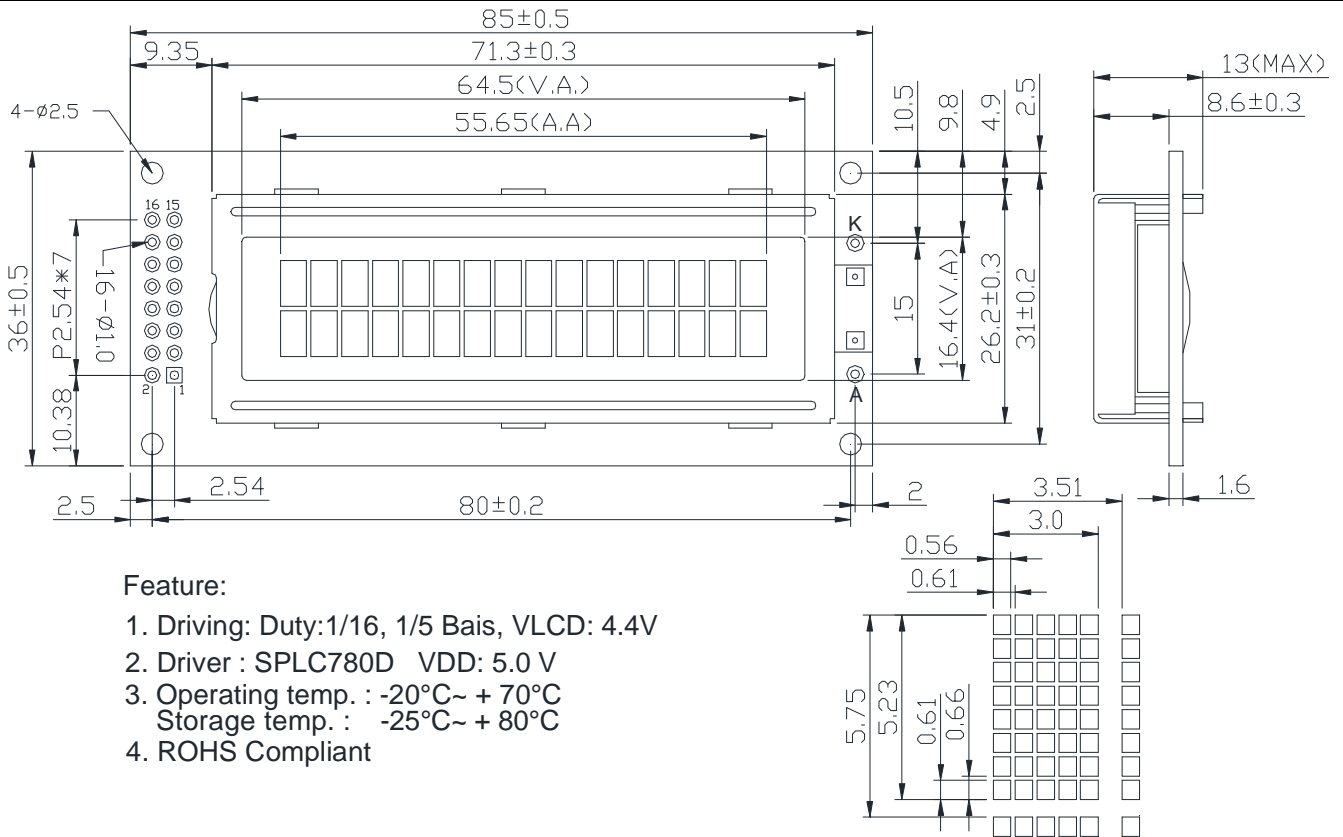

**Feature:**

1. Driving: Duty:1/16, 1/5 Bais, VLCD: 4.4V
2. Driver : SPLC780D VDD: 5.0 V
3. Operating temp. : -20°C~ + 70°C  
Storage temp. : -25°C~ + 80°C
4. ROHS Compliant

DOTS DETAIL SCALE=4:1

**PIN CONNECTIONS**

<b>PIN NO</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>SYMBOL</b>	<b>VSS</b>	<b>VDD</b>	<b>V0</b>	<b>RS</b>	<b>R/W</b>	<b>E</b>	<b>DB0</b>	<b>DB1</b>
<b>PIN NO</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>
<b>SYMBOL</b>	<b>DB2</b>	<b>DB3</b>	<b>DB4</b>	<b>DB5</b>	<b>DB6</b>	<b>DB7</b>	<b>LED+</b>	<b>LED-</b>

**BLOCK DIAGRAM**

