


EXTERNAL DIMENSION

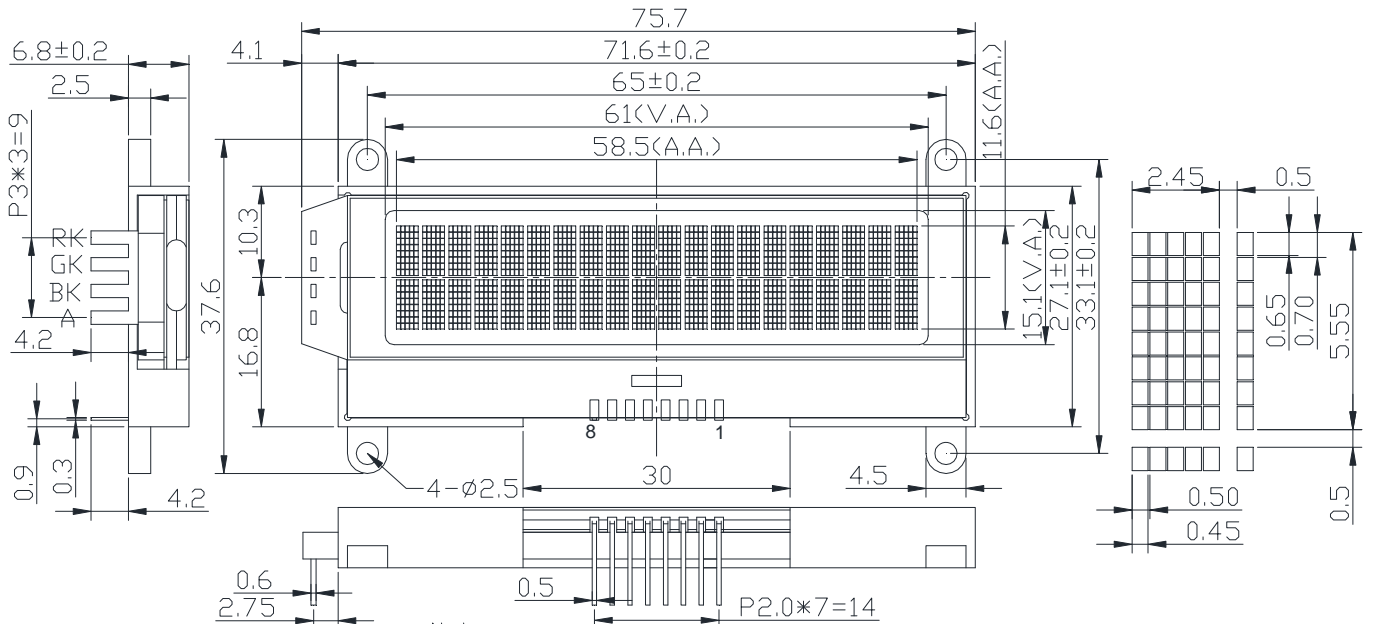

Notes:

- 1). Driver Method: 1/16duty, 1/5bias, VDD3.3V VLCD5.5V
- 2). Operating Temp: -20°C~70°C
- 5). Storage Temp: -30°C~80°C
- 6). Driver: ST7036i With IIC Interface
- 7). RoHS Compliant

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	RST	SCL	SDA	VSS	VDD	VOUT	C+	C-

BLOCK DIAGRAM

