


EXTERNAL DIMENSION

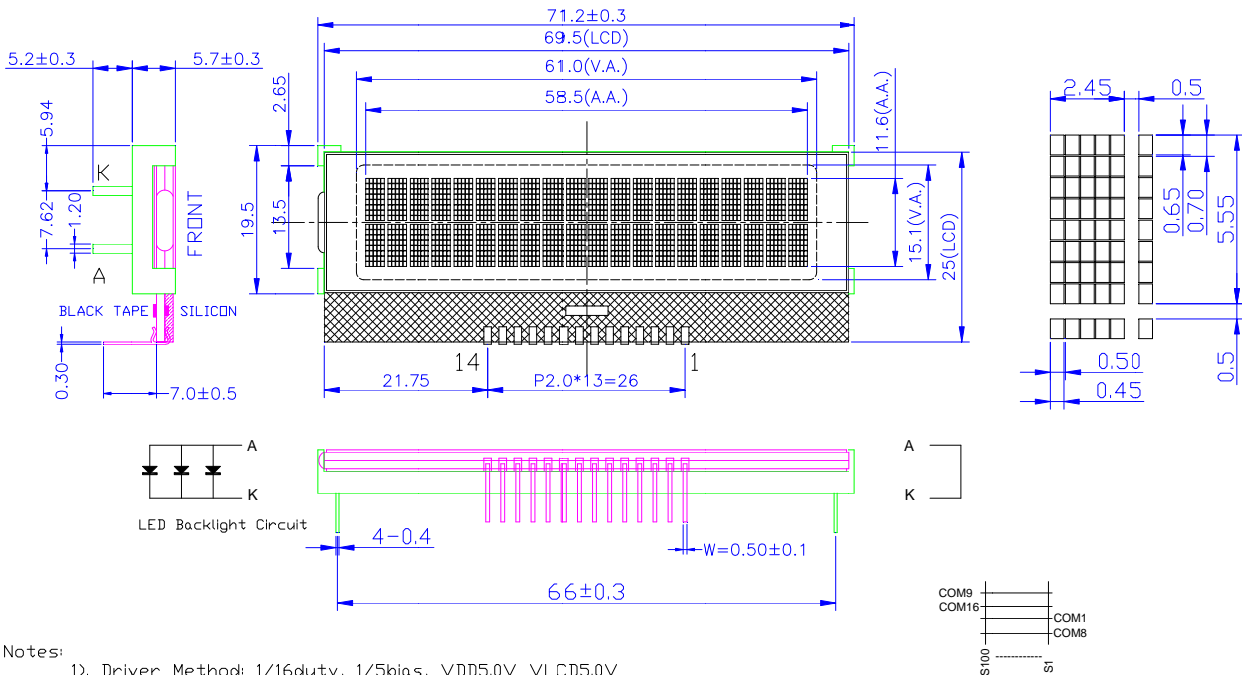

Notes:

- 1). Driver Method: 1/16duty, 1/5bias, VDD5.0V VLCD5.0V
- 2). Display Type: FSTN/Positive/Transflective
- 3). Viewing Angle: 12:00
- 4). Operating Temp: -20°C~70°C
- 5). Storage Temp: -30°C~80°C
- 6). Driver: NT7605H-BDT01
- 7). BKL Type: Edge White 2.8V~3.0V/45mA
- 8). RoHS Compliant

PIN CONNECTIONS

| | | | | | | | | |
|---------------|------------|------------|------------|------------|------------|------------|------------|------------|
| PIN NO | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| SYMBOL | GND | V5 | VDD | RS | R/W | E | DB0 | DB1 |
| PIN NO | 9 | 10 | 11 | 12 | 13 | 14 | | |
| SYMBOL | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | | |

BLOCK DIAGRAM

