


PHG1212CW6 SERIES (128 * 128 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

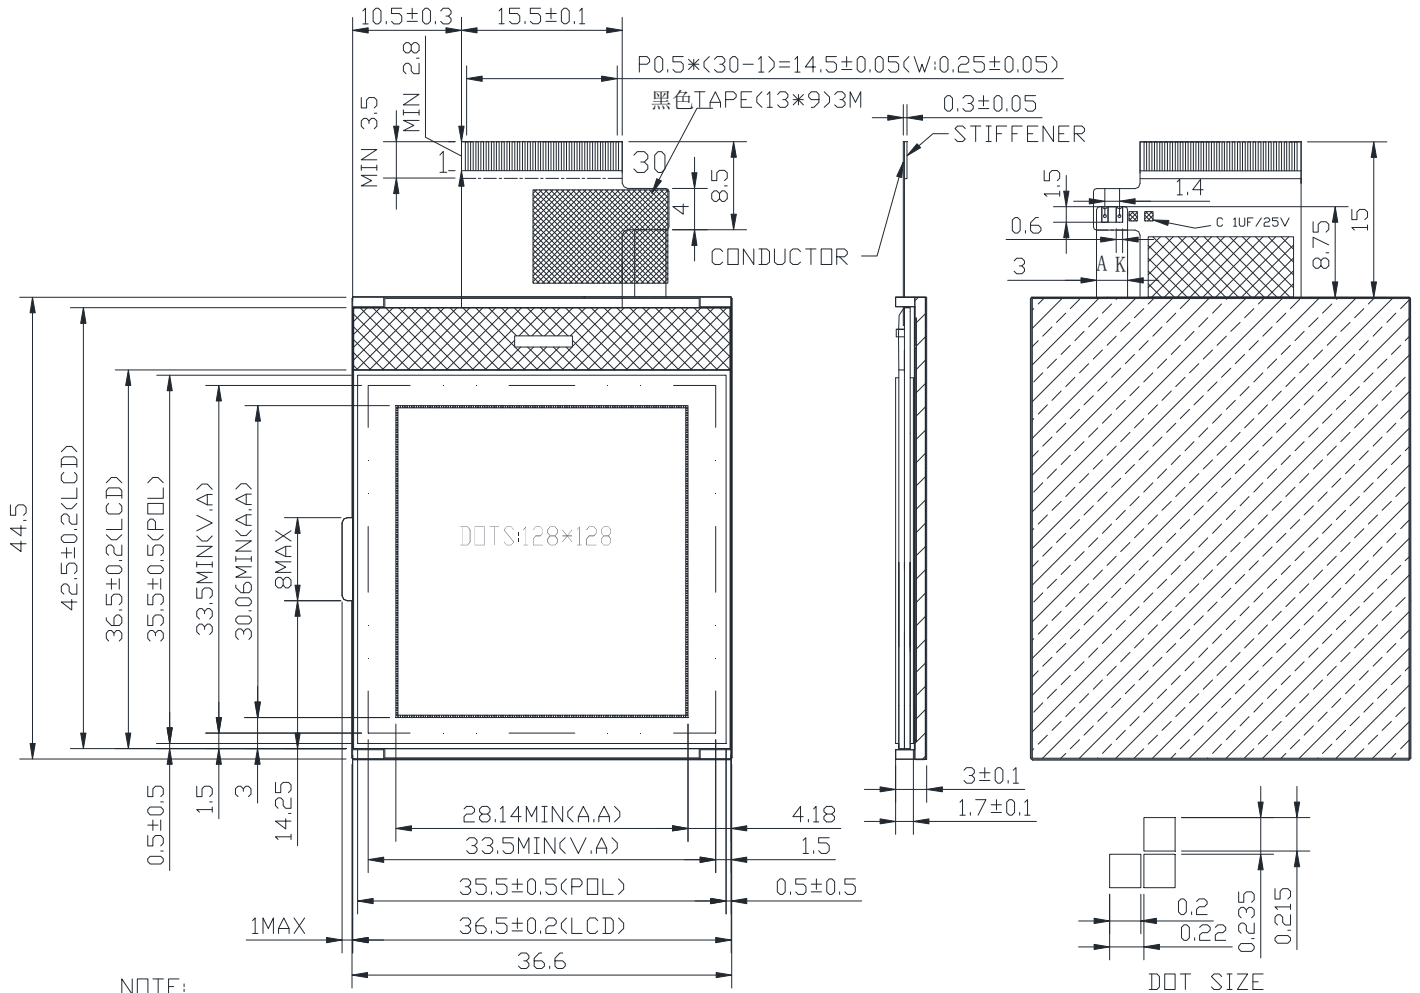

NOTE:

- 1 DRIVE METHOD: 1/128 DUTY, 1/12 BIAS
- 2 OPERATING VOLTAGE: 12.0V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C
- 5 DRIVE IC: ST7541(COG)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	PS0	PS1	CSB	RST	A0	RW_WR	E	D0	D1	D2
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D3	D4	D5	D6	D7	VDD	VSS	VOUT_OUT	VOUT_IN	REF
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	VEXT	INTRS	OSC1	V4	V3	V2	V1	V0	K	A