


# PHG1212G SERIES (128 \* 128 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

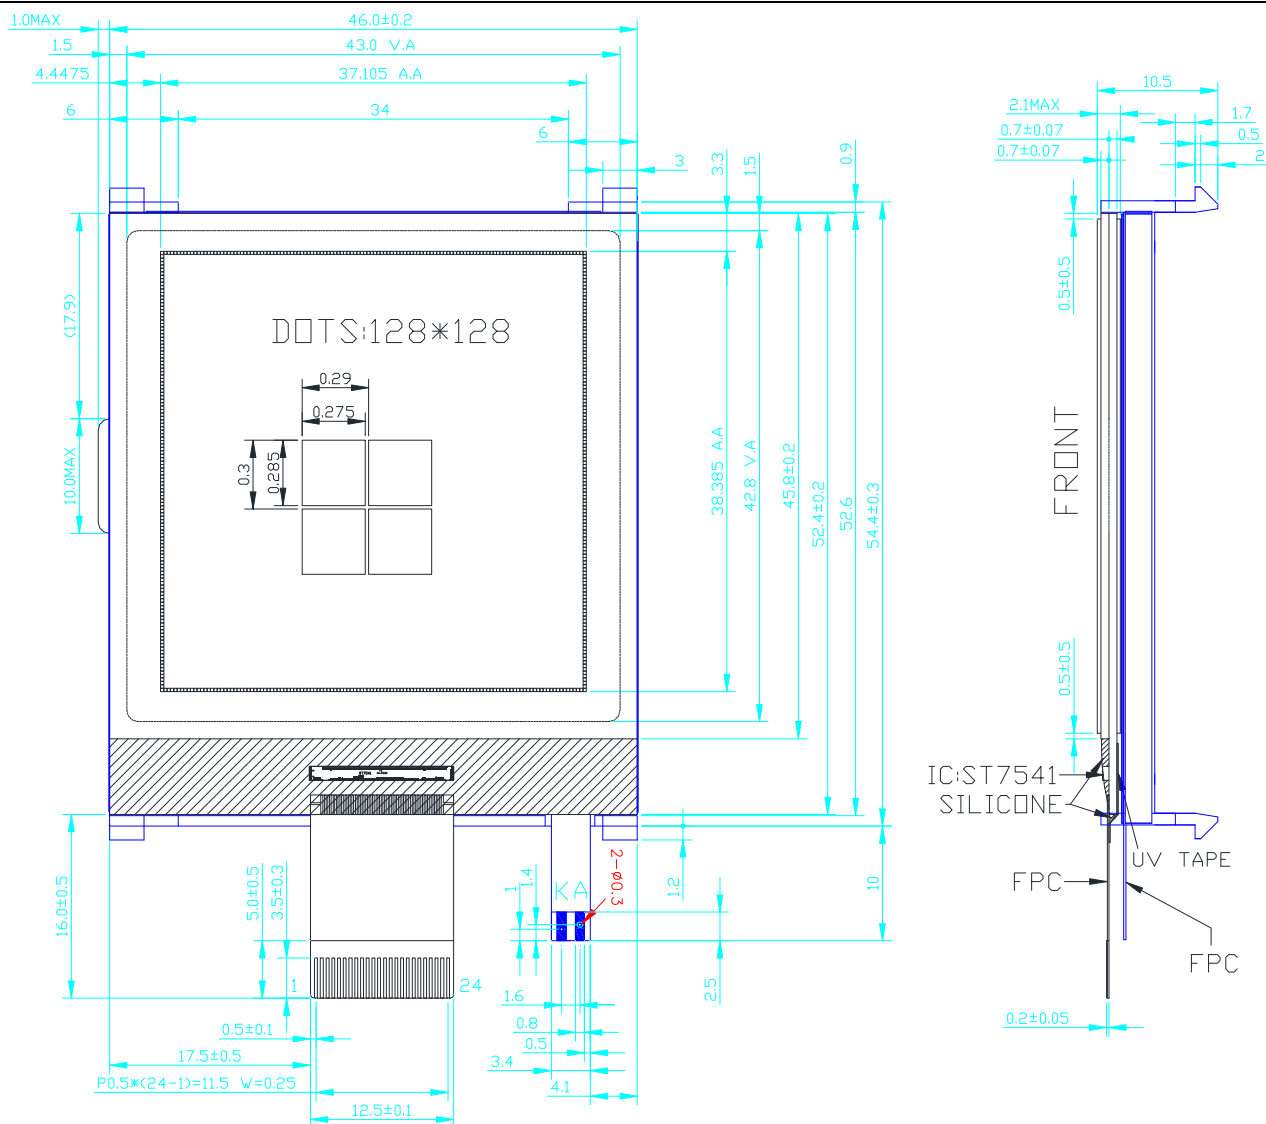

- NOTE:
- 1 DRIVE METHOD: 1/128 DUTY, 1/12 BIAS
  - 2 OPERATING VOLTAGE: 12.9V
  - 3 OPERATING TEMP: -0°C ~ +50°C
  - 4 STORAGE TEMP: -10°C ~ +60°C
  - 5 DRIVE IC: ST7541(CDG)
  - 6 CONNECTOR: FPC
  - 7 GENERAL TOLERANCE: ±0.2

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	V0	V1	V2	V3	V4	VOUT_IN	VOUT_OUT	VSS
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	VDD	D7	D6	D5	D4	D3	D2	D1
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	D0	E/RD	RW/WR	A0	RST	CBS	PS1	PS0