


# PHG12061GW SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

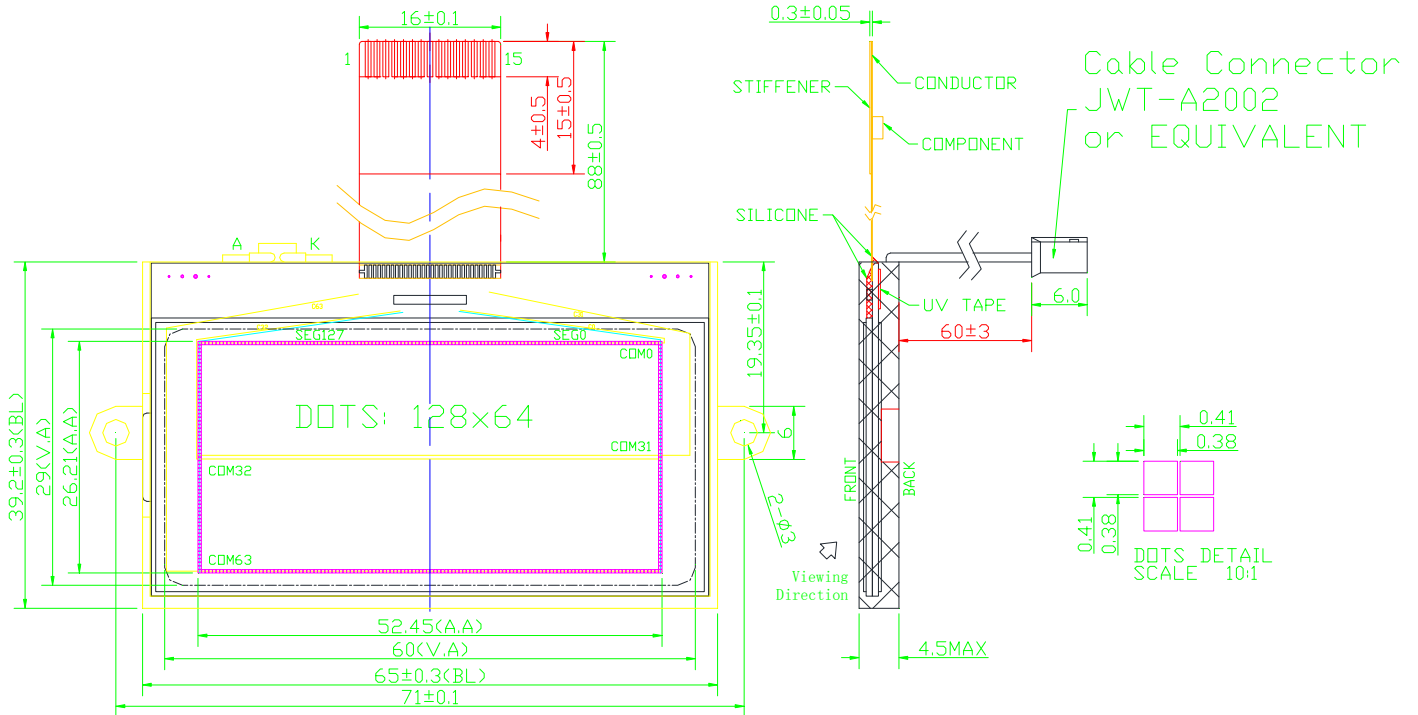

### NOTE

- |   |                           |
|---|---------------------------|
| 1 DRIVE METHOD: 1/64 DUTY, 1/9 BIAS       | 5 DRIVE IC: ST7565R(CDG)  |
| 2 OPERATING VOLTAGE: 9.0V (VDD=2.8V~3.2V) | 6 CONNECTOR: FPC          |
| 3 OPERATING TEMP: -20°C ~ +70°C           | 7 GENERAL TOLERANCE: ±0.2 |
| 4 STORAGE TEMP: -30°C ~ +80°C             |                           |

## PIN CONNECTIONS

<b>PIN NO</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
<b>SYMBOL</b>	<b>/CS1</b>	<b>/RES</b>	<b>A0</b>	<b>/WR</b>	<b>/RD</b>	<b>DB0</b>	<b>DB1</b>	<b>DB2</b>
<b>PIN NO</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	
<b>SYMBOL</b>	<b>DB3</b>	<b>DB4</b>	<b>DB5</b>	<b>DB6</b>	<b>DB7</b>	<b>GND</b>	<b>VDD</b>	