


# PHG12062MW SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

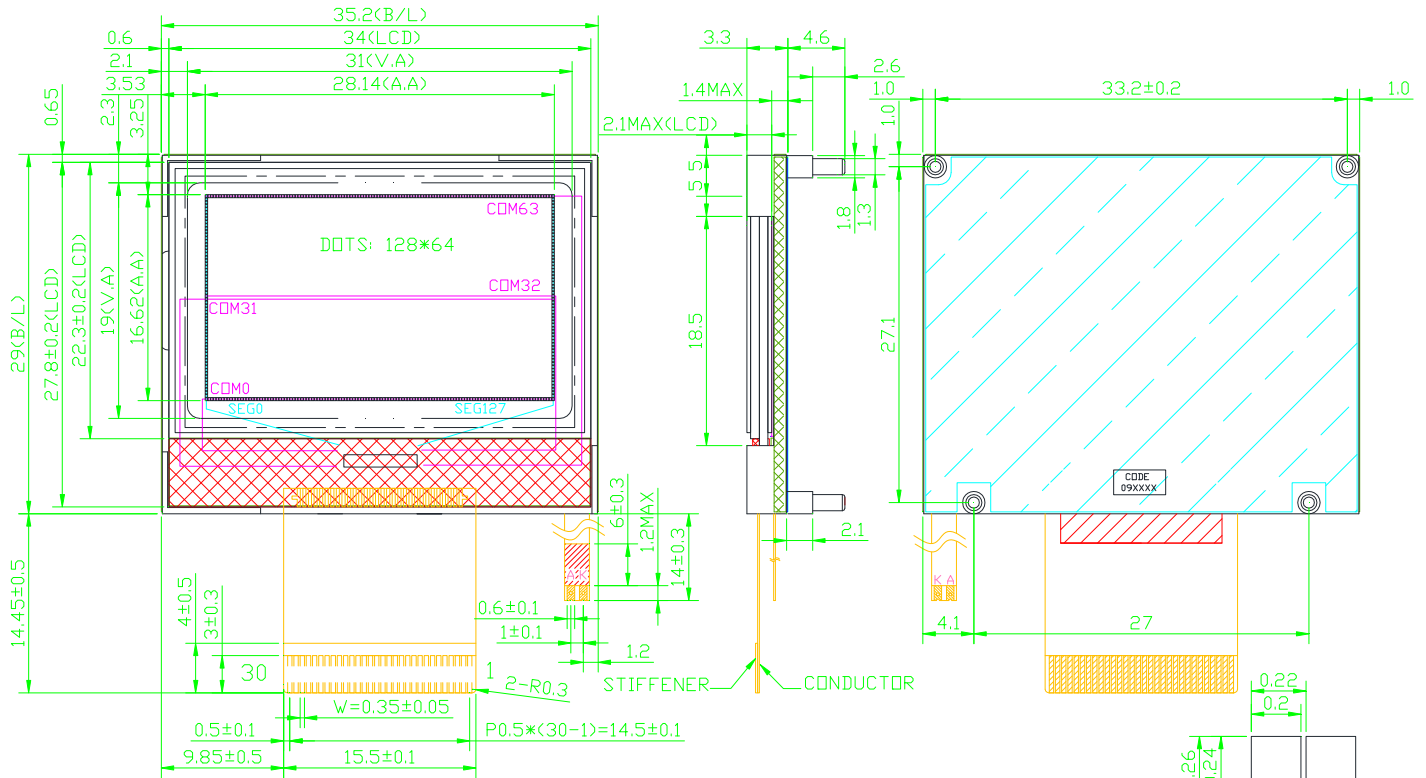

NOTE:

- 1 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 8.3
- 3 OPERATING TEMP: -20°C ~ +60°C
- 4 STORAGE TEMP: -30°C ~ +70°C
- 5 DRIVE IC: ST7565R (COG)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2
- 8 RoHS

DOTS DETAIL  
SCALE 20:1

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	CS1B	RESB	A0	WRB	RDB	D0	D1	D2	D3	D4
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D5	D6	D7	VDD	VSS	VOUT	NC	C3+	C1-	C1+
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	C2+	C2-	V4	V3	V2	V1	V0	NC	C86	P/S