


EXTERNAL DIMENSION

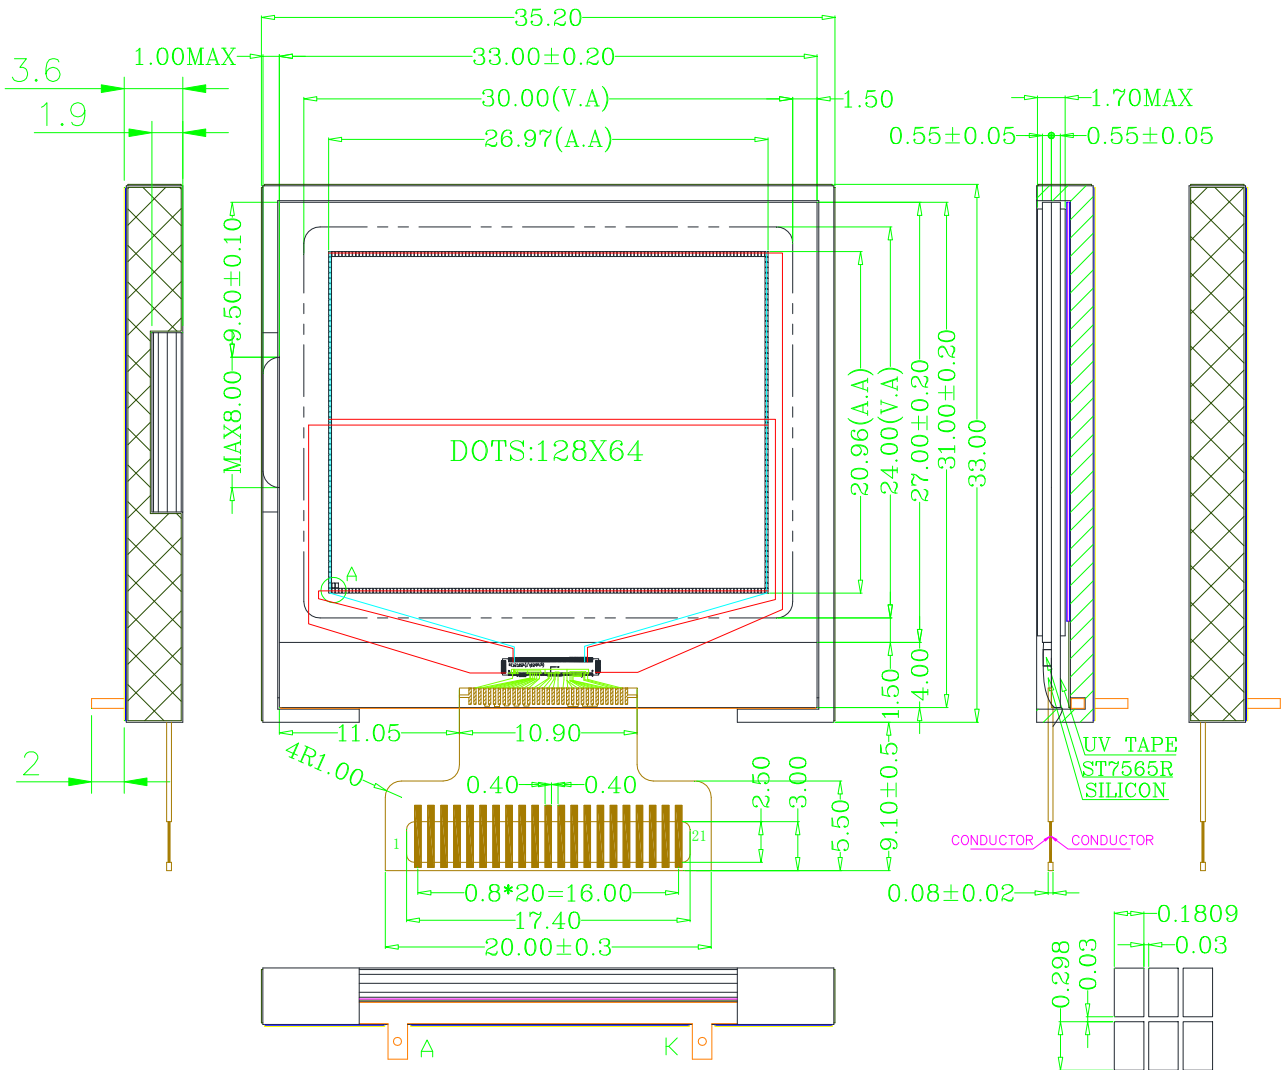

NOTE:

- | | |
|-----------------------------------|---------------------------|
| 1 DRIVE METHOD: 1/65DUTY, 1/9BIAS | 5 DRIVE IC: ST7565R(COG) |
| 2 OPERATING VOLTAGE: 8.4V | 6 CONNECTOR: FPC |
| 3 OPERATING TEMP: -10°C ~ +60°C | 7 GENERAL TOLERANCE: ±0.2 |
| 4 STORAGE TEMP: -20°C ~ +70°C | 8 RoHS |

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7
SYMBOL	IRS	VR	V0	V1	V2	V3	V4
PIN NO	8	9	10	11	12	13	14
SYMBOL	CAP+(NC)	CAP2-	CAP2+	CAP1+	CAP1-	CAP3+	VOUT
PIN NO	15	16	17	18	19	20	21
SYMBOL	VSS	VDD	D7	D6	A0	REST	CS1