


EXTERNAL DIMENSION

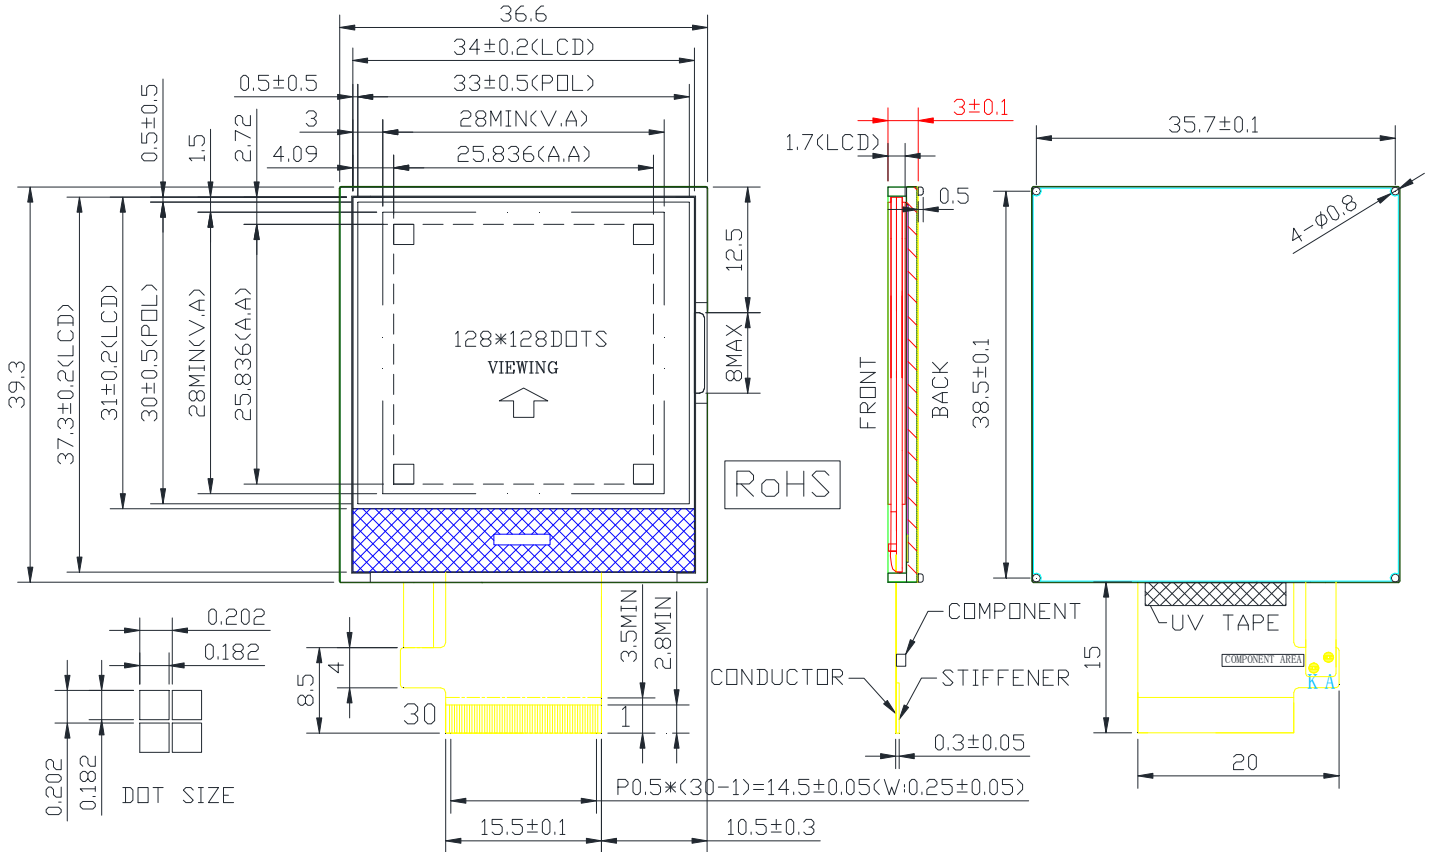

NOTE:

- 1 DRIVE METHOD: 1/128 DUTY, 1/12 BIAS
- 2 OPERATING VOLTAGE: 12.0V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C
- 5 DRIVE IC: ST7571(CDG)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	PS0	PS1	CSB	RES	A0	WR	RD	D0	D1	D2
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D3	D4	D5	D6	D7	VDD	VSS	VM0	VM0	NC
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	NC	NC	NC	NC	NC	NC	NC	NC	K	A