


# PHG12061F2W SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

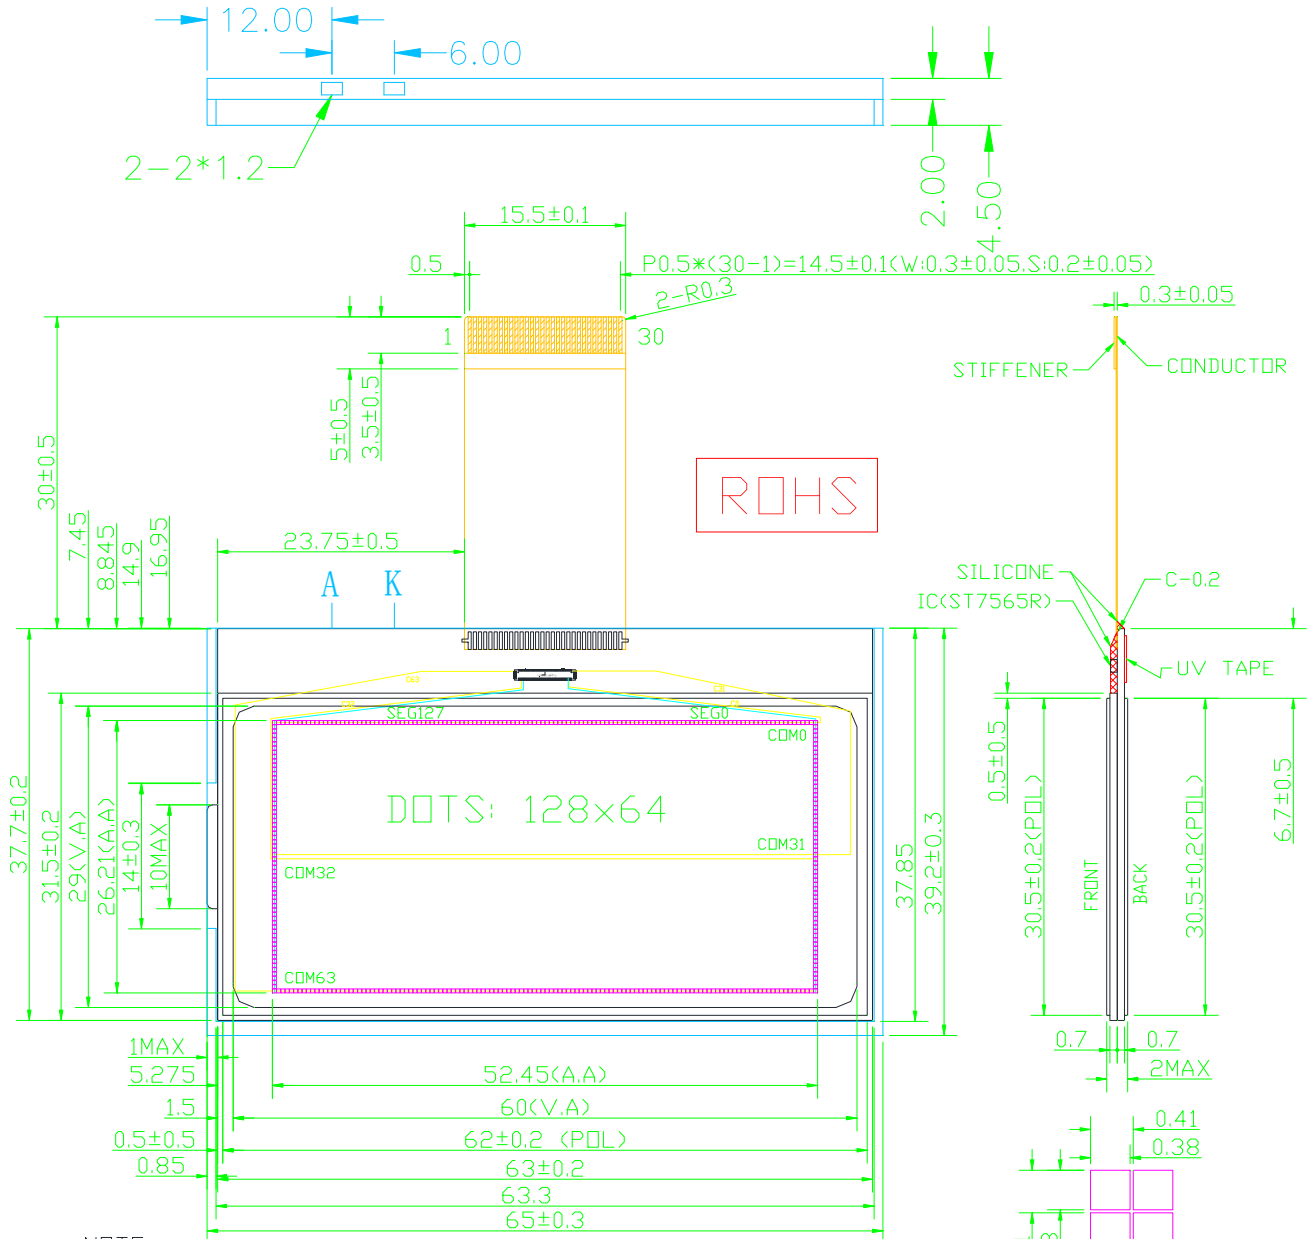

NOTE:

- 1 DRIVE METHOD: 1/64 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 9.0V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C
- 5 DRIVE IC: ST7565R<COG>
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2

DOTS DETAIL  
SCALE 10:1

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	/CS1	/RST	A0	/WR	/RD	D0	D1	D2	D3	D4
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D5	D6	D7	VSS	VOUT	CAP3+	CAP1-	CAP+	CAP2+	CAP2-
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	V4	V3	V2	V1	V0	VR	VDD	C86	IRS	VDD