


**EXTERNAL DIMENSION**

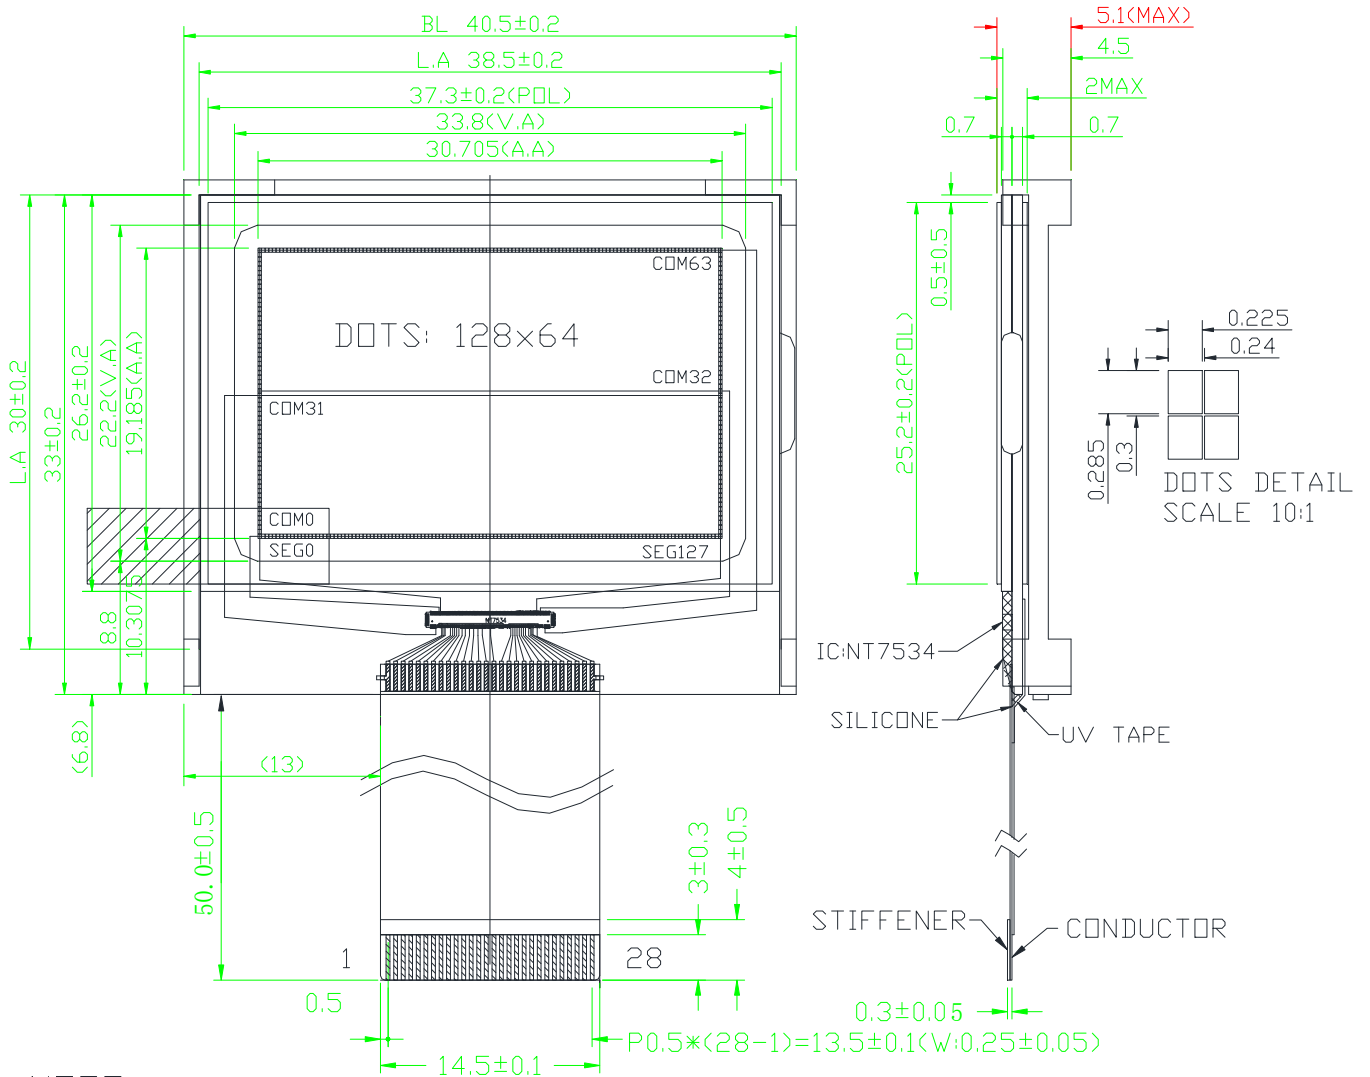

NOTE:

- 1 DRIVE METHOD:  $1/65$ DUTY,  $1/9$ BIAS
- 2 OPERATING VOLTAGE:  $9.2V$
- 3 OPERATING TEMP:  $-20^{\circ}C \sim +70^{\circ}C$
- 4 STORAGE TEMP:  $-30^{\circ}C \sim +80^{\circ}C$
- 5 DRIVE IC: NT7534 (COG)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE:  $\pm 0.2$

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7
SYMBOL	VDD	C86	VSS	V0	V4	V3	V2
PIN NO	8	9	10	11	12	13	14
SYMBOL	V1	C2-	C2+	C1+	C1-	C3+	VOUT
PIN NO	15	16	17	18	19	20	21
SYMBOL	VSS	D7	D6	D5	D4	D3	D2
PIN NO	22	23	24	25	26	27	28
SYMBOL	D1	D0	E/RD	R/W	A0	/RES	/CS1