


PHG1206X2W SERIES (128 * 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

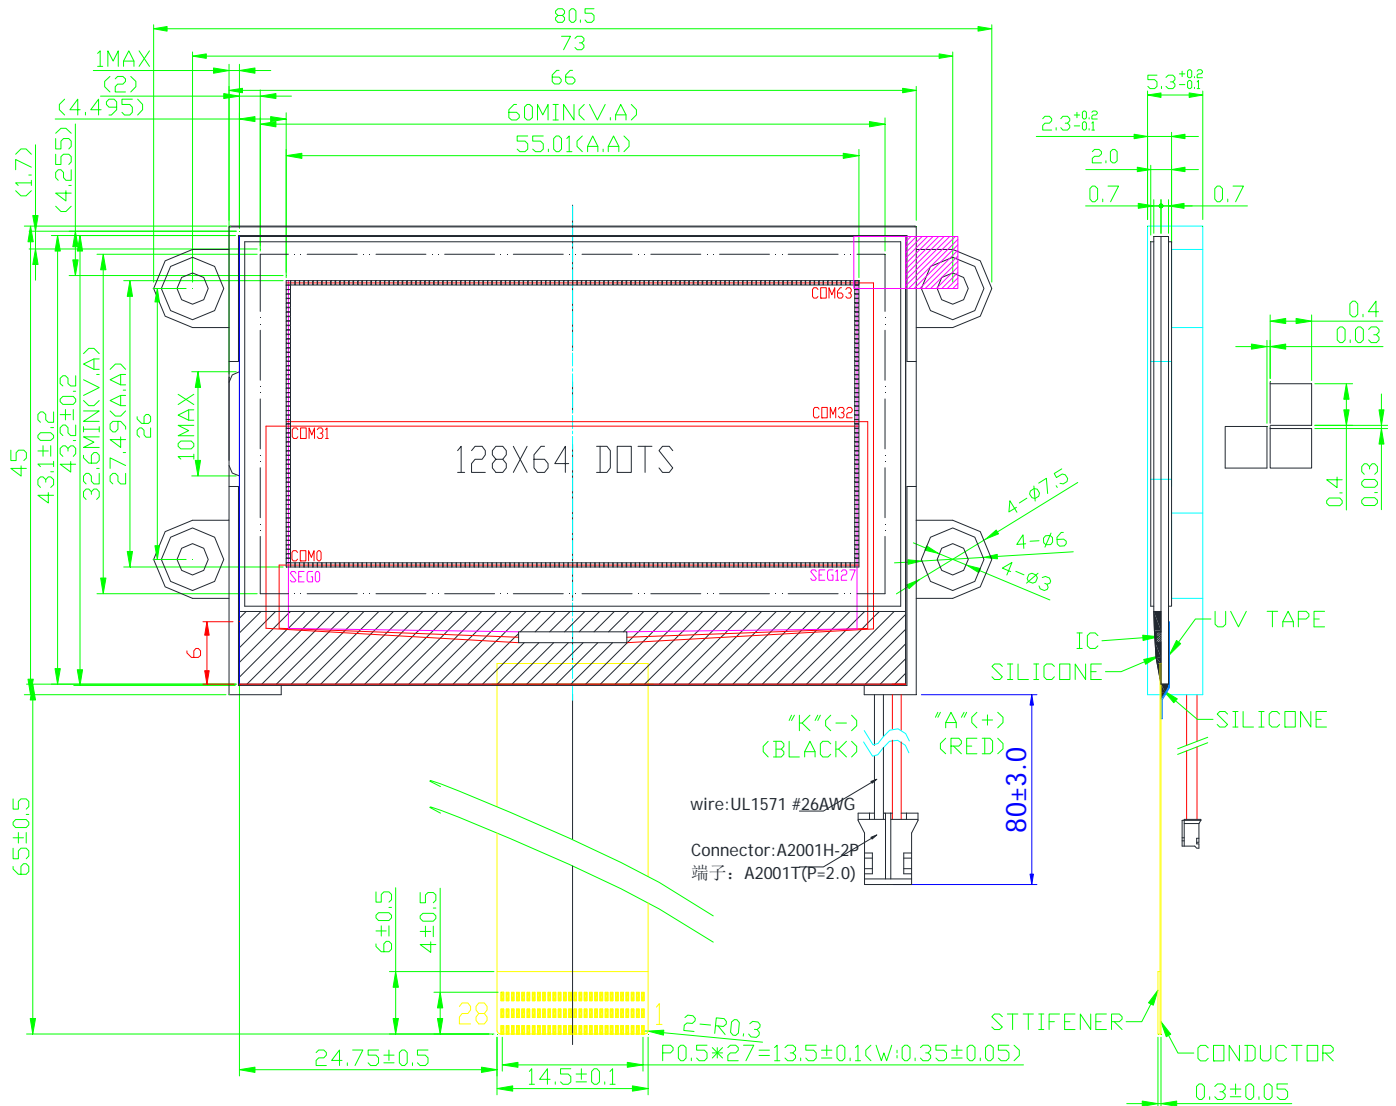

NOTE:

- 1 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 8.0 V
- 3 OPERATING TEMP.: -20 °C ~+70 °C

- 4 STORAGE TEMP.: -30 °C ~+80 °C
- 5 IC: NT7538H
- 6 RoHS

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7
SYMBOL	CS1	/RES	A0	WR	RD	D0	D1
PIN NO	8	9	10	11	12	13	14
SYMBOL	D2	D3	D4	D5	D6	D7	VDD
PIN NO	15	16	17	18	19	20	21
SYMBOL	VSS	VOUT	CAP3+	CAP1-	CAP1+	CAP2+	CAP2-
PIN NO	22	23	24	25	26	27	28
SYMBOL	V1	V2	V3	V4	V0	VR	IRS