


PHG12A06AW SERIES
(128 * 64 DOTS)



龐 誼 科 技 股 份 有 限 公 司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

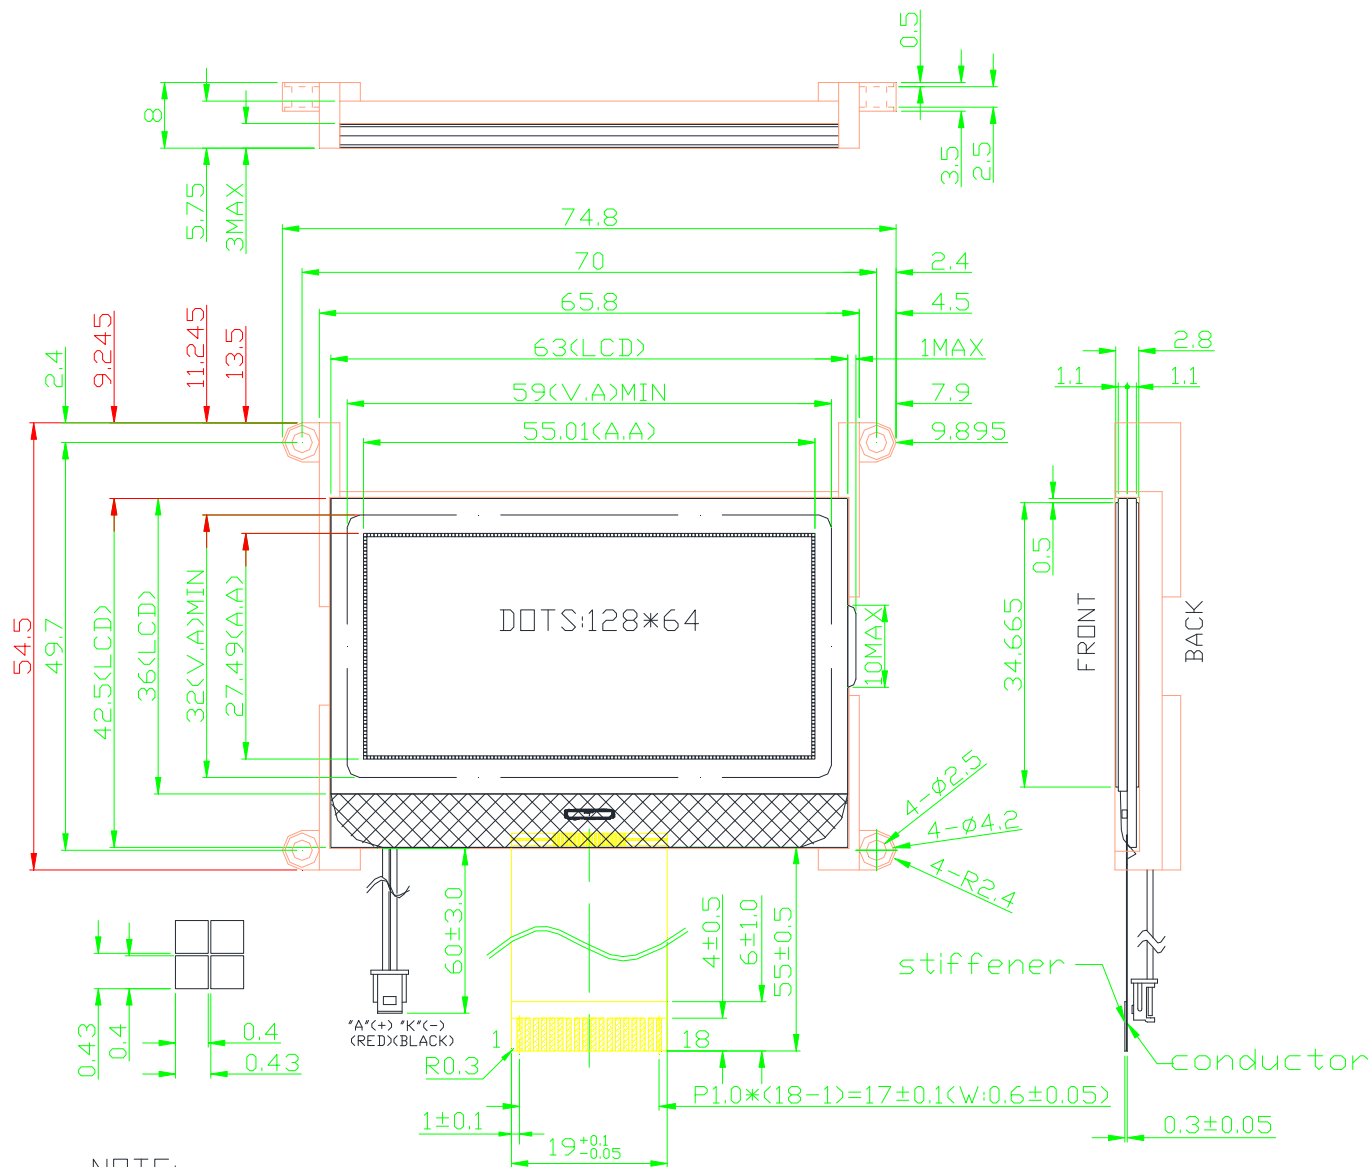

NOTE:

- 1 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 9.0V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C
- 5 DRIVE IC: ST7565R(C0G)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	VDD	VSS	V0	V1	V2	V3	V4	CAP2-	CAP2+
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	CAP1+	CAP1-	CAP3+	VOUT	D7(SI)	D6(SCL)	RS(A0)	/RES	/CS1