


PHG12A06BW SERIES (128 * 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

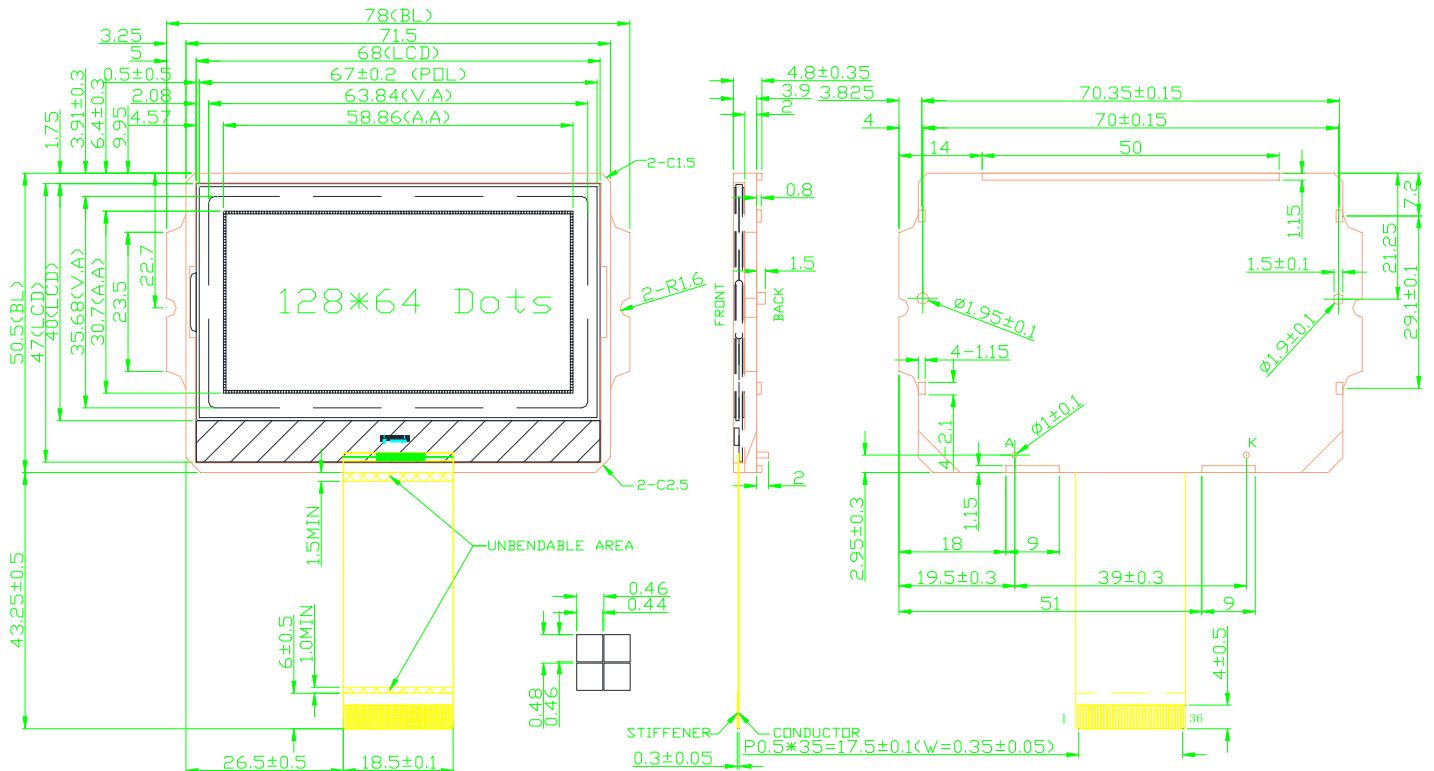

NOTE:

- 1 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 12.5V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C

- 5 DRIVE IC: ST7567<COG>
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	CS1	NC	RST	A0	EWR	ERD	DB0	DB1	DB2
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	DB3	DB4	DB5	DB6	DB7	NC	VDD	VSS	NC
PIN NO	19	20	21	22	23	24	25	26	27
SYMBOL	NC	NC	NC	NC	NC	V0	XV0	NC	VM0
PIN NO	28	29	30	31	32	33	34	35	36
SYMBOL	NC	VG	NC	NC	NC	C86	VSS	VDD	VDD