


# PHG12A06C SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

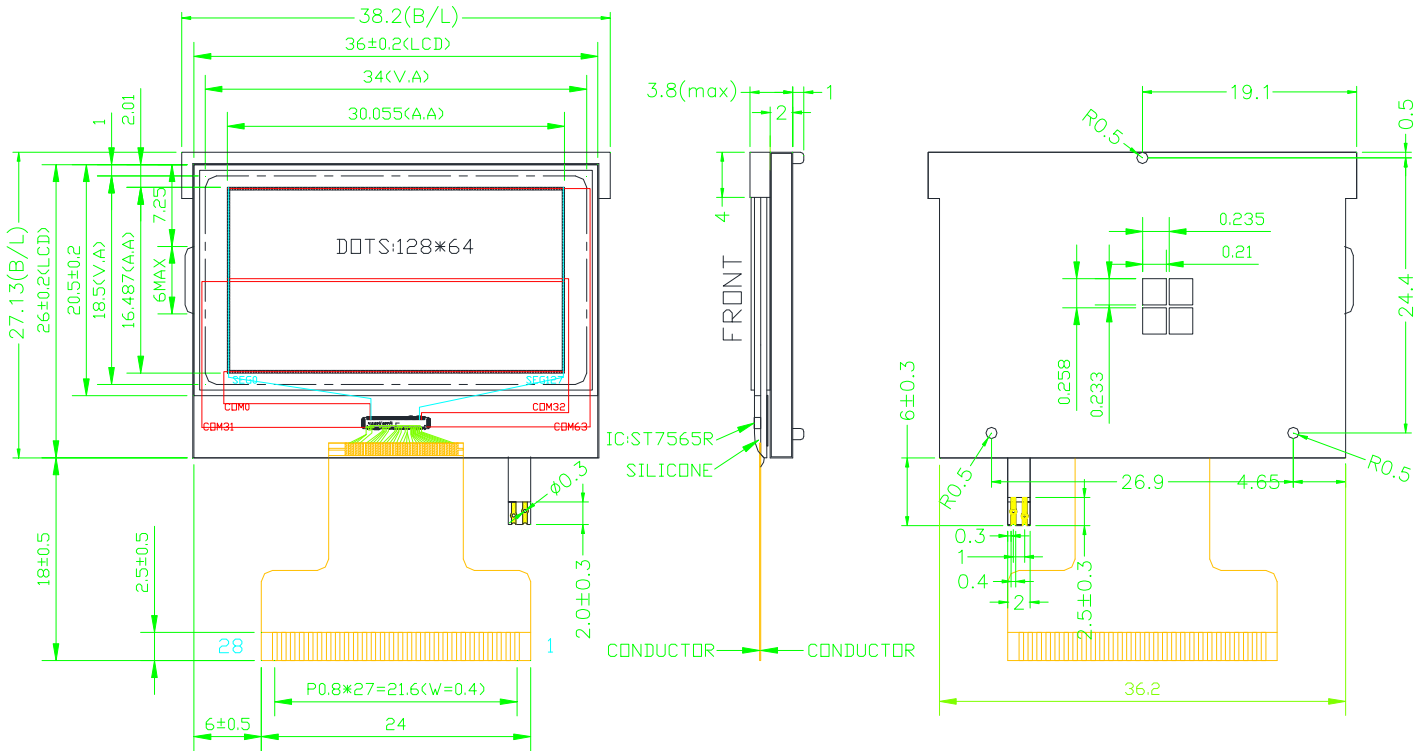

### NOTE:

- 1 DRIVE METHOD: 1/64 DUTY, 1/9 BIAS
- 2 OPERATING VOLTAGE: 10.0V
- 3 OPERATING TEMP: 0°C ~ +50°C
- 4 STORAGE TEMP: -10°C ~ +60°C

- 5 DRIVE IC: ST7565R(COG)
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2
- 8 RoHS

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7
SYMBOL	/CS1	/RES	A0	R/W(WR)	E(RD)	D0	D1
PIN NO	8	9	10	11	12	13	14
SYMBOL	D2	D3	D4	D5	D6	D7	VSS
PIN NO	15	16	17	18	19	20	21
SYMBOL	VOUT	C3P	C1N	C1P	C2P	C2N	V4
PIN NO	22	23	24	25	26	27	28
SYMBOL	V3	V2	V1	V0	NC	C86	VDD