




龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

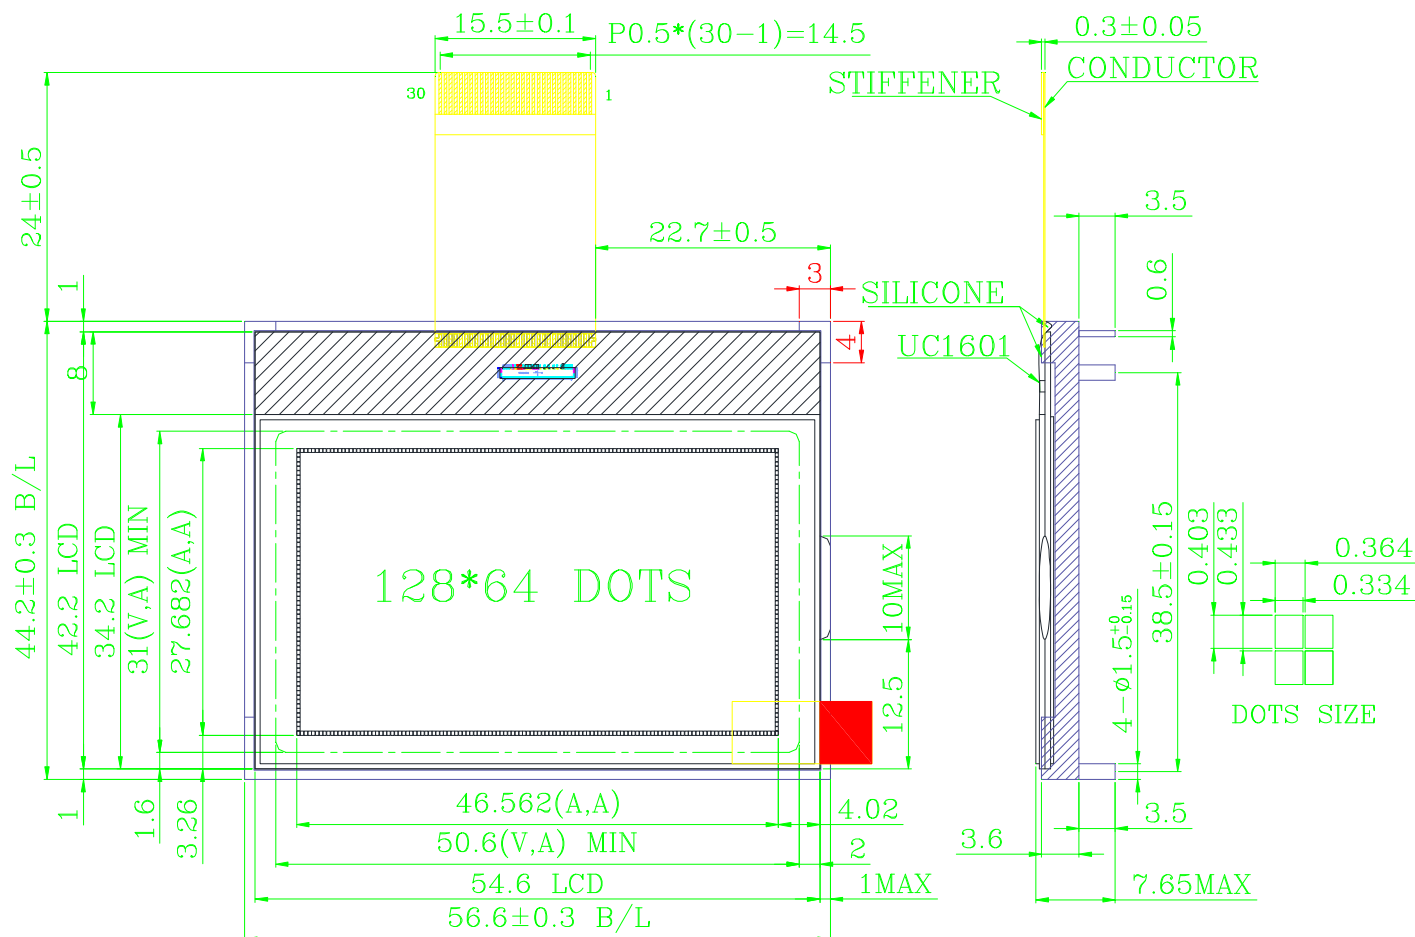

NOTE:

- 1 DRIVE METHOD: 1/65 DUTY, 1/9 BIAS
2 OPERATING VOLTAGE: 10.2V
3 OPERATING TEMP: 0°C ~ +50°C
4 STORAGE TEMP: -20°C ~ +70°C

- 5 DRIVE IC: UC1601(COG)
6 CONNECTOR: FPC
7 GENERAL TOLERANCE: ± 0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	NC	NC	NC	VLCD	VB0+	VB0-	VB1-	VB1+	VSS
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	VDD	BM1	BM0	D7/SDA	D6/SCK	D5	D4	D3	D2/SD1	D1
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D0/SCK	WR1	WR0	CD	RST	/CS0	NC	NC	NC	NC