PRG1206LW SERIES
(128 * 64 DOTS)

麗誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

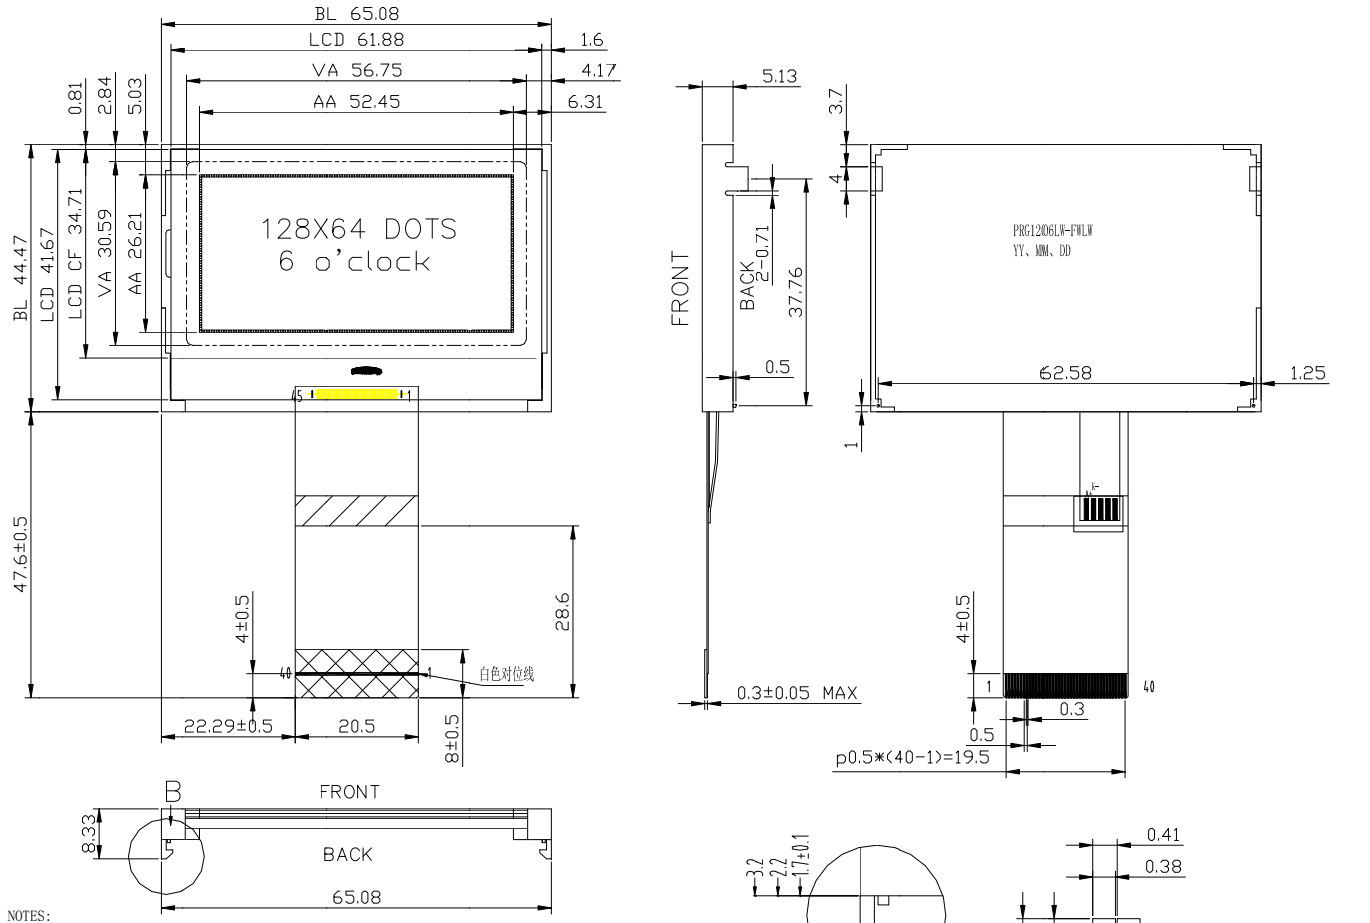

NOTES:
1. DISPLAY TYPE:FSTN
2. VIEW DIRECTION:6 O'CLOCK
3. POLARIZER TYPE:TRANSFLECTIVE/POSITIVE
4. DRIVER METHOD:1/65 DUTY 1/9 BIAS
5. LCD DRIVING VOLTAGE:9.9V
6. LOGIC SUPPLY VOLTAGE:3.0V
7. OPERATING TEMP:-20° C~+70° C
8. STORAGE TEMP:-30° C~+85° C
9. CONTROLLER/DRIVE IC:ST7567-G4
10. MCU INTERFACE: 8 bit Parallel OR Serial Interface
11. BACKLIGHT: (5CHIPS WHITE)
    DRIVER METHOD:Vf=3.1±0.3V, If=75mA
12. CONNECTOR TYPE:COG+FPC
13. OTHER TOLERANCE:±0.2mm



PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	CS	RES	AO	WR	RD	D0	D1	D2	D3	D4
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D5	D6	D7	VDD	VSS	V0	XV0	VM	VG	C86
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	P/S	A+	K-	NC	NC	NC	NC	NC	NC	NC
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC