


EXTERNAL DIMENSION

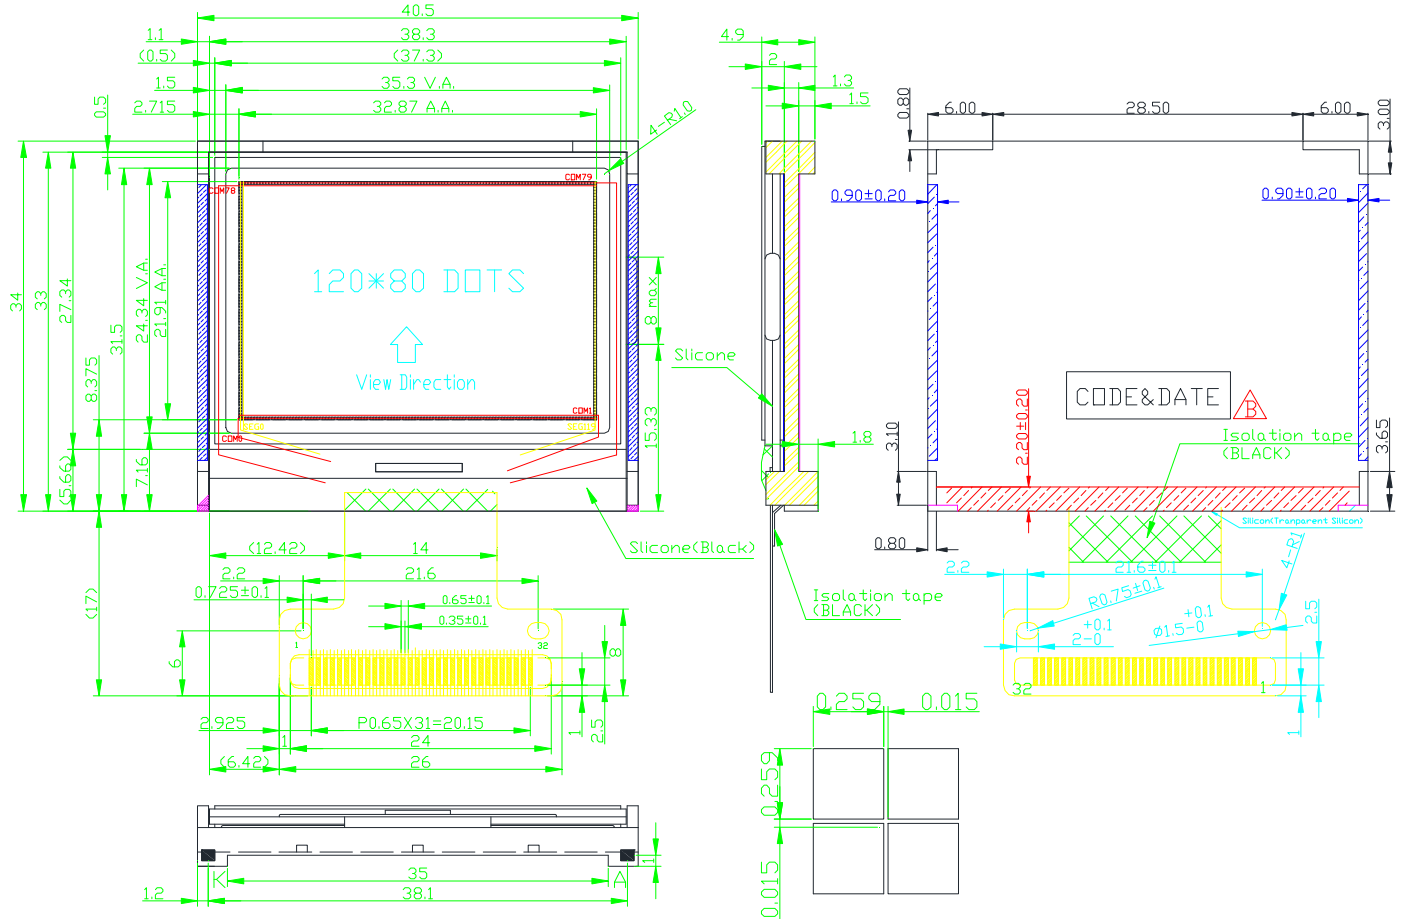

NOTE:

- 1 DRIVE METHOD: 1/80 DUTY, 1/8 BIAS
- 2 OPERATING VOLTAGE: 8.7V
- 3 OPERATING TEMP: -20°C ~ +70°C
- 4 STORAGE TEMP: -30°C ~ +80°C

- 5 DRIVE IC: ST7571-G4C(COG)<VDD1=3.0V,DCSP=L>
- 6 CONNECTOR: FPC
- 7 GENERAL TOLERANCE: ±0.2
- 8 RoHS

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	NC	NC	NC	NC	VG	VD1	NC	NC
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	NC	NC	XV0	V0	NC	NC	VM0	VSS
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	VDD	D7	D6	D5	D4	D3	D2	D1
PIN NO	25	26	27	28	28	30	31	32
SYMBOL	D0	E/RD	/WR	A0	/RES	/CS1	PS1	PS0