


EXTERNAL DIMENSION

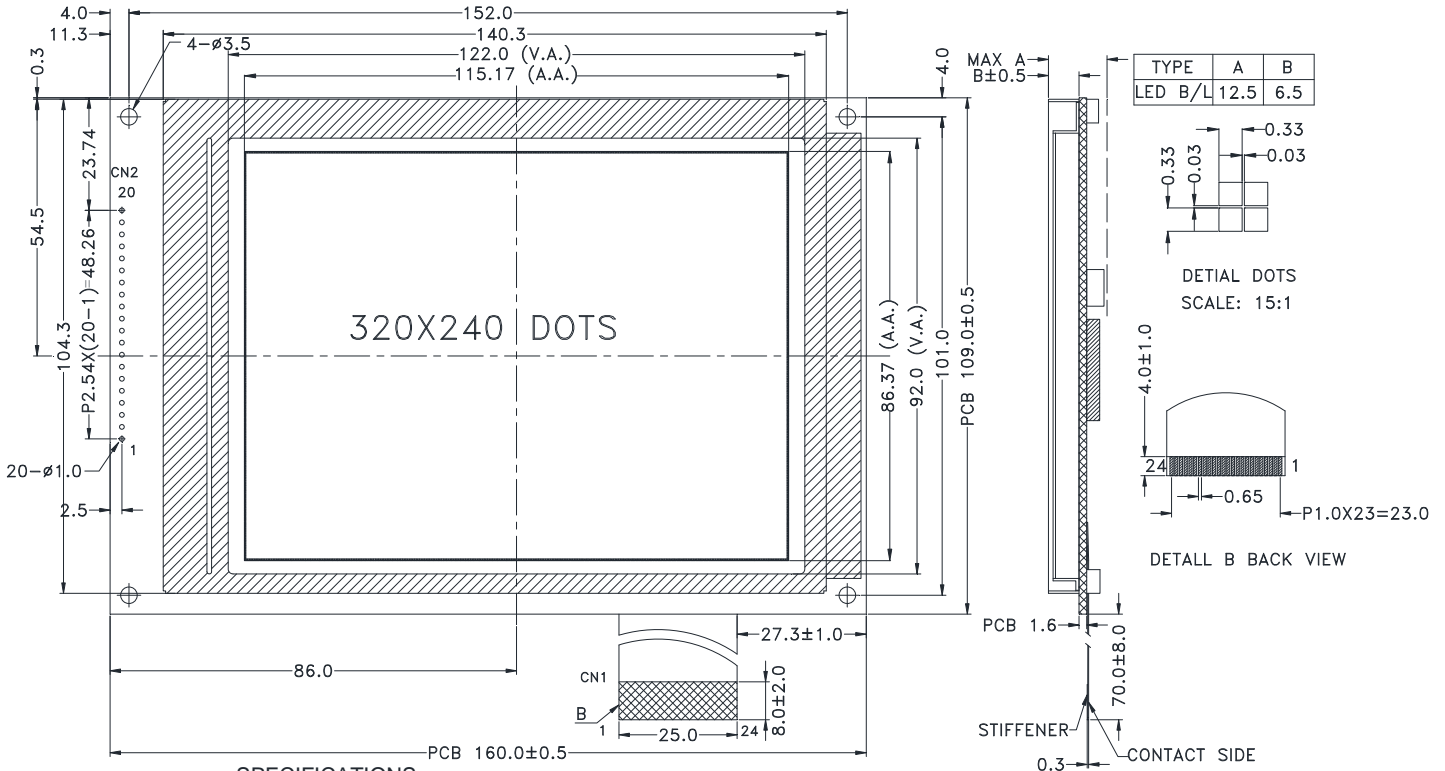

SPECIFICATIONS

1. LCD DRIVING VOLTAGE: 24.0V
2. LOGIC VOLTAGE: 3.3V
3. OPERATING TEMP: -20°C~+70°C
4. STORAGE TEMP: -30°C~+80°C
5. DRIVE MODE: 1/240 DUTY, 1/16 BIAS
6. OTHER:
MECHANICAL TOL.±0.3 UNLESS SPECIFIED

PIN CONNECTIONS

CON1:

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	/RST	/RD	/WR	/CS	A0	DB0	DB1	DB2
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB3	DB4	DB5	DB6	DB7	VDD	VSS	VEE
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	VADJ	NC	NC	NC	NC	NC	LED+	LED-

CON2:

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	VSS	VDD	V0	/WR	/RD	/CS	A0	/RST	DB0	DB1
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LED+	VOUT	LED+	LED-