


PT0153232-A1 SERIES

(320*RGB*320 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

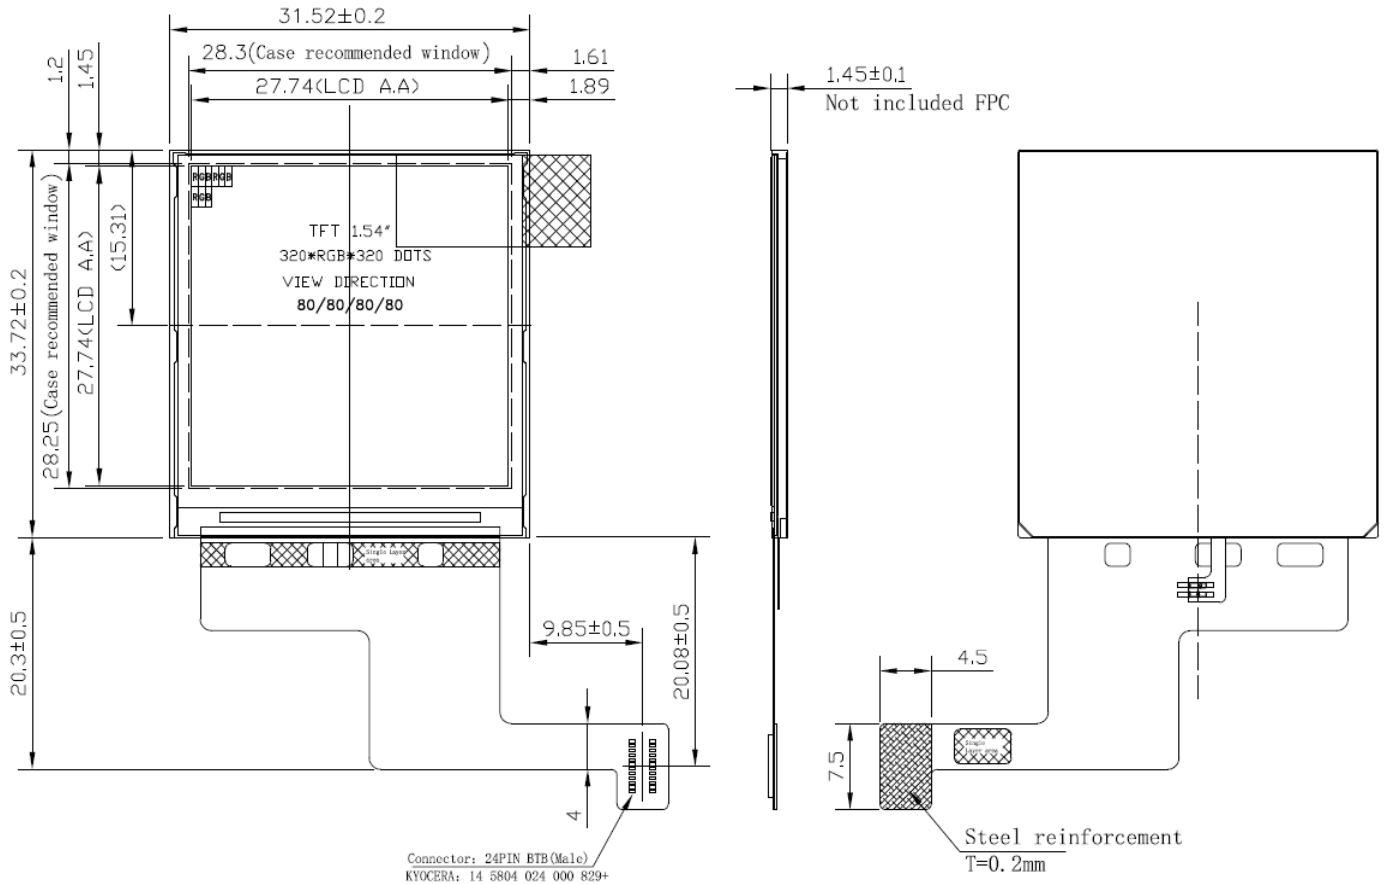

NOTES:

1. DISPLAY TYPE: 1.54" TFT
2. VIEWING DIRECTION: ALL
3. LCD DRIVE IC: ST7796S
4. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
5. OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
6. STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
7. UNMARKER TOLERANCE: ± 0.20
8. PROTECTION: RoHS

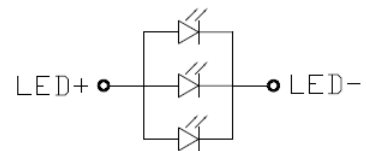

Backlight circuit diagram

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VCC	GND	VCC	CLK_N	IOVCC	CLK_P	RESET	GND
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	TE	DATA0_N	GND	DATA0_P	NC	GND	NC	NC
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	GND	NC	NC	GND	LED+	LED-	LED-	LED-