


PT0181216-B8 SERIES (128*RGB*160 DOTS)



魔誼科技股份有限公司
Palm Technology Co., Ltd.



EXTERNAL DIMENSION

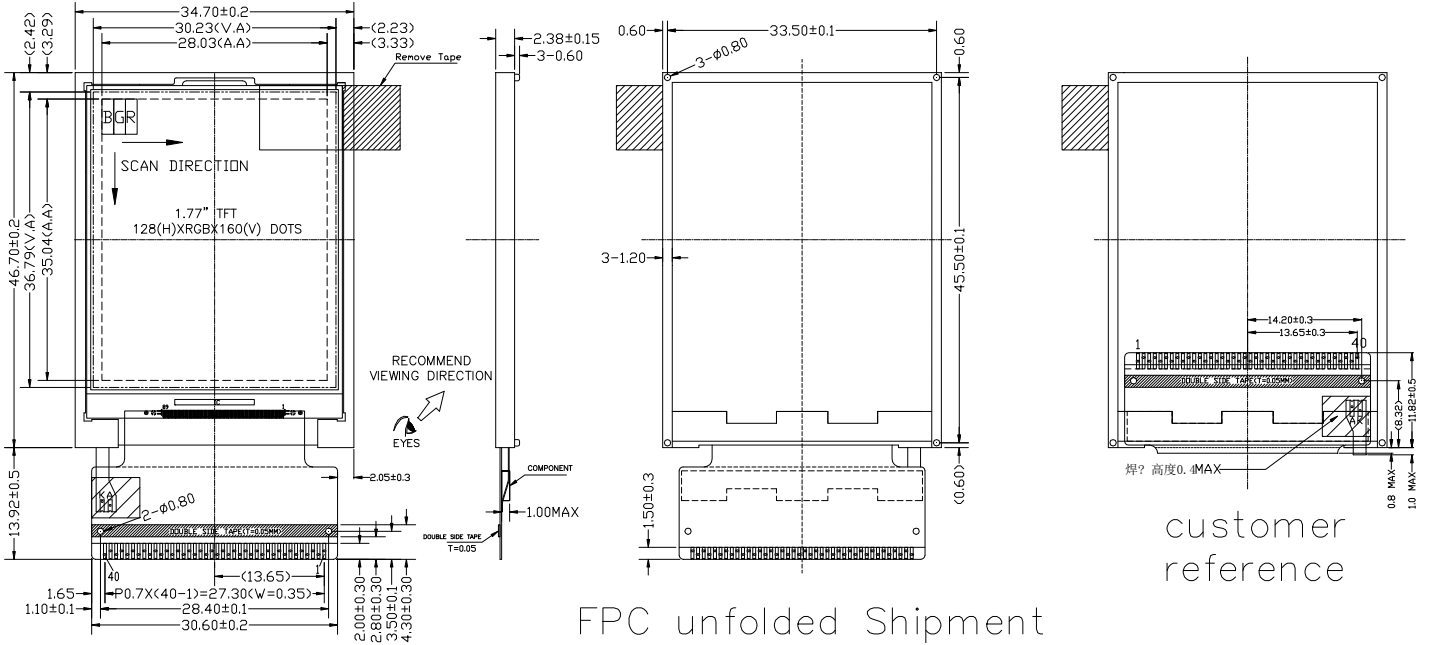

- NOTES:
1. OPERATING TEMPERATURE: -20°C TO 70°C
 2. STORAGE TEMPERATURE: -30°C TO 80°C
 3. POLARIZER SIZE: TRANSMISSIVE
 4. DRIVE IC: HX8353-D
 5. BACKLIGHT: 2CHIP-WHITE LED
 6. ROHS COMPLIANCY
 7. GENERAL TOLERANCE: ±0.2mm

FPC unfolded Shipment

LED CIRCUIT DIAGRAM:



PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	EXTC	BS0	BS1	RGB_P	SS_P	GS_P	REV_P	LC_SEL0	LC_SEL1	GC_SEL
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	SPI_SEL	VCI	NRD_E	DNC_SCL	DB17	DB16	DB15	DB14	DB13	DB12
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB11	DB10	DB9	DB8	DB1	DB3	DB5	DB7	NRESET	NCS
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	BD6	DB4	DB2	BS2_SDA	DB0	NWR_RNW	IOVCC	GND	LEDA	LEDK