


PT101WXGA-B5 SERIES
(1280*RGB*800 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

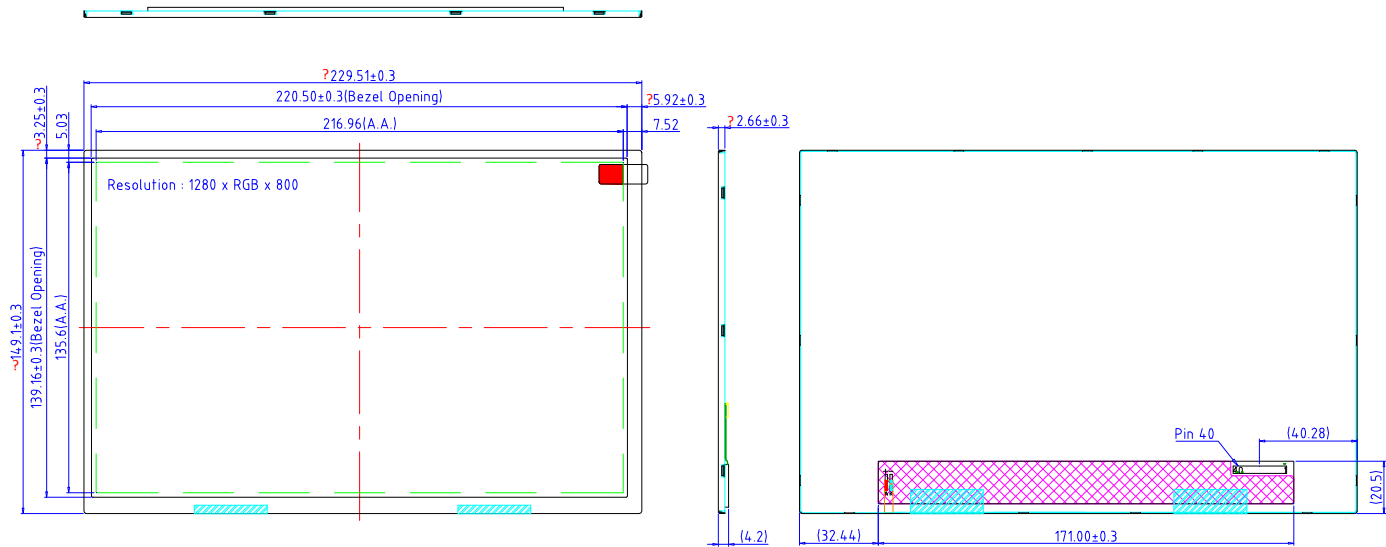

- Notes:
- 1. MODULE BRIGHTNESS: 350cd/m² MIN
 - 2. DISPLAY TYPE: 10.1" TFT, TRANSMISSIVE
 - 3. VIEWING DIRECTION: ALL 85° VIEWING DIRECTION
 - 4. OPERATING TEMPERATURE: 0° C - +50° C
 - 5. STORAGE TEMPERATURE: -20° C - +60° C
 - 6. BACKLIGHT TYPE: 39 WHITE LEDS
 - 7. LED: If=260mA (CONSTANT CURRENT)
 - 8. "*" FOR IMPORTANT DIMENSION "() " FOR REFERENCE DIMENSION
 - 9. ROHS MUST BE COMPLIED. (USE LEAD-FREE PROCESS)

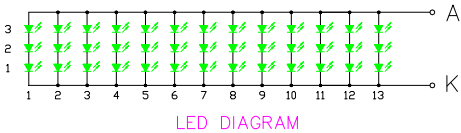

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	VCOM	VDD	VDD	NC	NC	NC	GND	Rxin0-	Rxin0+	GND
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	Rxin1-	Rxin1+	GND	Rxin2-	Rxin2+	GND	RxCLK-	RxCLK+	GND	Rxin3-
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	Rxin3+	GND	NC	NC	GND	NC	LED_PWM	NC	AVDD	GND
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	LED-	LED-	NC	NC	VGL	NC	CABC_EN	VGH	LED+	LED+