


PT101WXGA-C8 SERIES

(1280*RGB*800 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

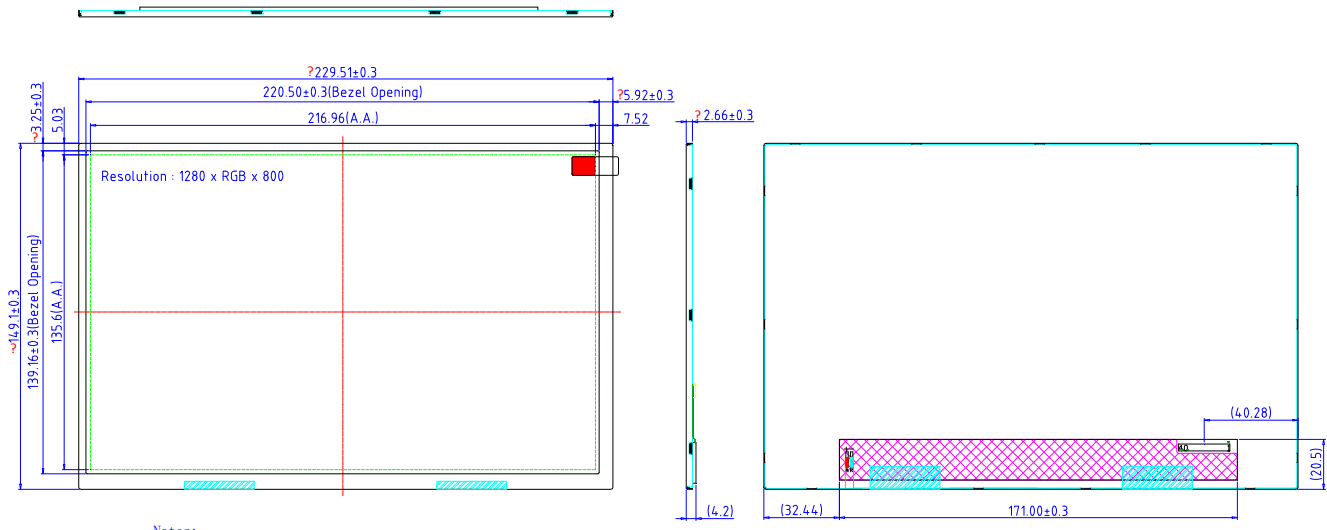

RoHS

- Notes:
1. MODULE BRIGHTNESS: 500cd/m² (TYP)
 2. DISPLAY TYPE: 10.1" TFT, TRANSMISSIVE
 3. VIEWING DIRECTION: ALL 85° VIEWING DIRECTION
 4. OPERATING TEMPERATURE: -20° C - +70° C
 5. STORAGE TEMPERATURE: -30° C - +80° C
 6. BACKLIGHT TYPE: 45 WHITE LEDS
 7. LED: If=180mA (CONSTANT CURRENT)
 8. "*" FOR IMPORTANT DIMENSION "(") FOR REFERENCE DIMENSION
 9. ROHS MUST BE COMPLIED. (USE LEAD-FREE PROCESS)



PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	VCOM	VDD	VDD	NC	NC	NC	GND	Rxin0-	Rxin0+	GND
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	Rxin1-	Rxin1+	GND	Rxin2-	Rxin2+	GND	RxCLK-	RxCLK+	GND	Rxin3-
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	Rxin3+	GND	NC	NC	GND	NC	NC	NC	AVDD	GND
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	LED-	LED-	NC	NC	VGL	NC	NC	VGH	LED+	LED+