


**EXTERNAL DIMENSION**

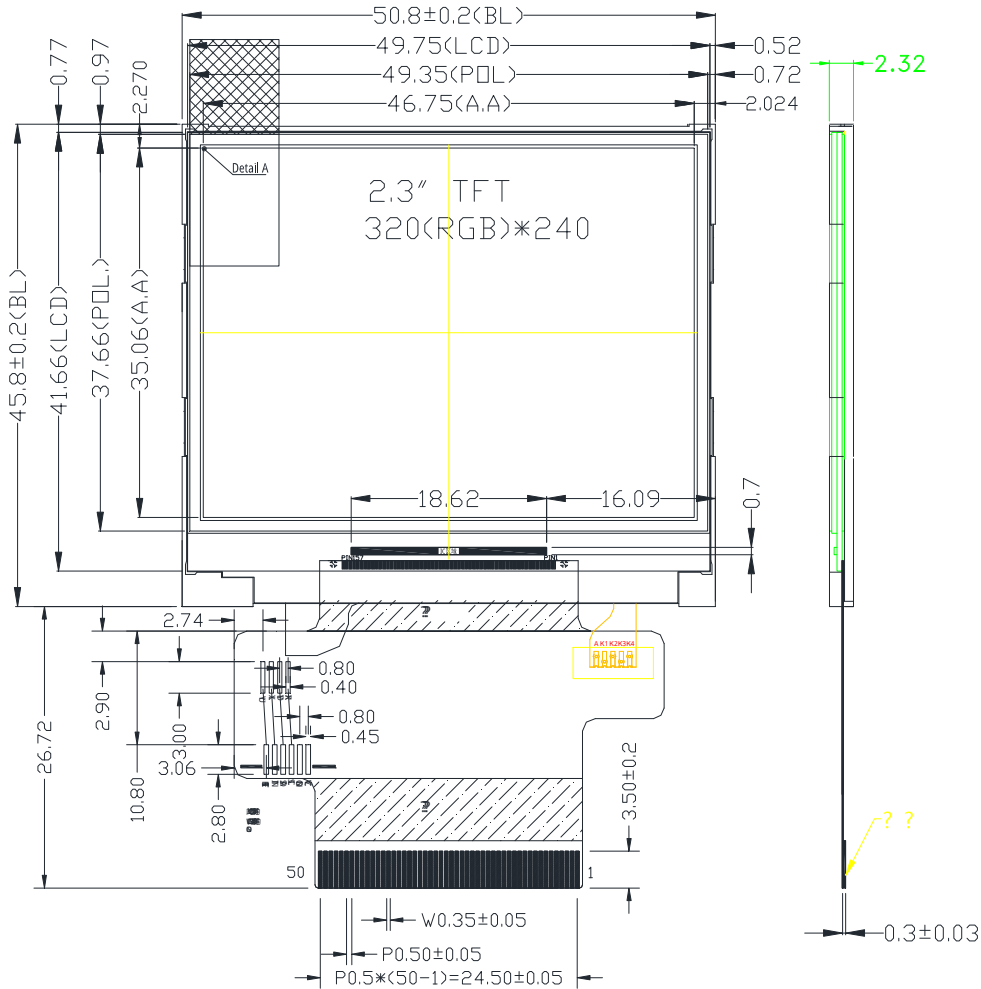

NOTES:

1. Display type: 262K/65K TFT
2. Driver IC: ILI9342C
3. Operation Voltage: 2.8V-3.3
4. Operating temperature: -20°~+70°  
Storage temperature: -30°~+80°
5. ROHS must be complied

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	LEDA	LEDK1	LEDK2	LEDK3	LEDK4	IM0	IM1	IM2	IM3	RESET
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	VSYNC	HSYNC	DOTCLK	DE	DB17	DB16	DB15	DB14	DB13	DB12
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DB1	DB0	NC	SDA	RD/E	WR	D/C(SCL)	CS	TE	VDDI
PIN NO	41	42	43	44	45	46	47	48	49	50
SYMBOL	VDDI	VCI	GND	SCL	SDA	INT	RESET	GND	GND	GND