


(240*RGB*320 DOTS)



龐誼科技股份有限公司


Palm Technology Co., Ltd.

EXTERNAL DIMENSION

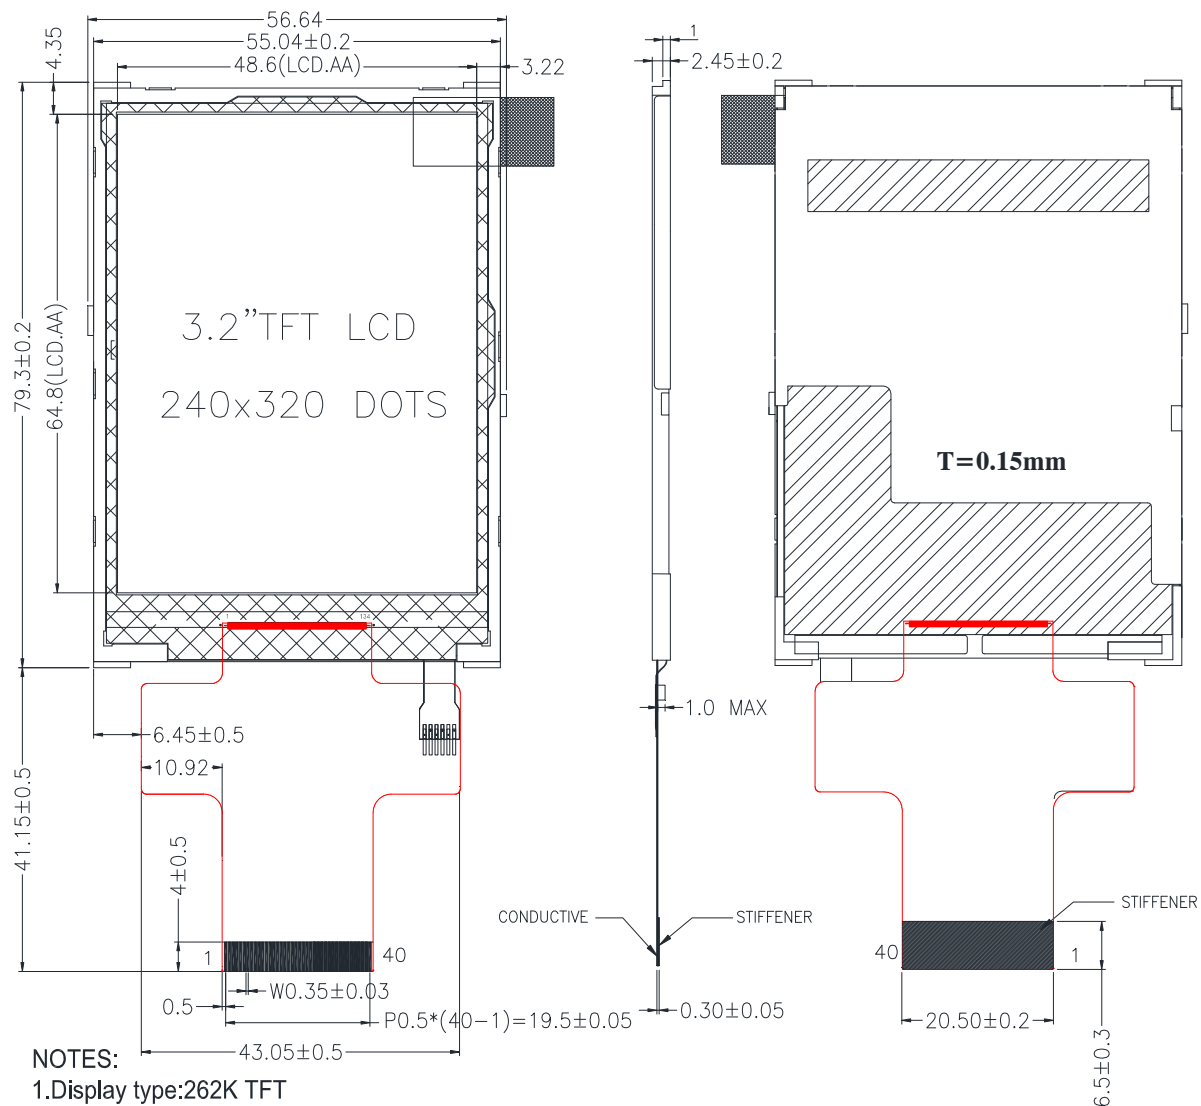

NOTES:

1. Display type: 262K TFT
2. Driver IC: ILI9341
3. Optima Viewing Direction: 12 O'clock
4. Operation Voltage: VDD=2.8V
5. Operating temperature: -20°~+70°
Storage temperature: -30°~+80°
6. Viewing angle range Wide Angle of view
7. Backlight: 5- LED White (500cd)
8. ROHS



VF=3.1 ± 0.4V IF=100mA

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	NC	NC	NC	GND	IOVCC	VCI	FMARK	CS	DC
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	WR	RD	SDI/SDA	SDO	RESET	GND	DB0	DB1	DB2	DB3
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB4	DB5	DB6	DB7	DB8	DB9	DB10	DB11	DB12	DB13
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DB14	DB15	A	K	K	K	GND	IM0	IM1	IM2