


# PT0353224-A8 SERIES

## (320\*RGB\*240 DOTS)




魔誼科技股份有限公司  
Palm Technology Co., Ltd.

### EXTERNAL DIMENSION

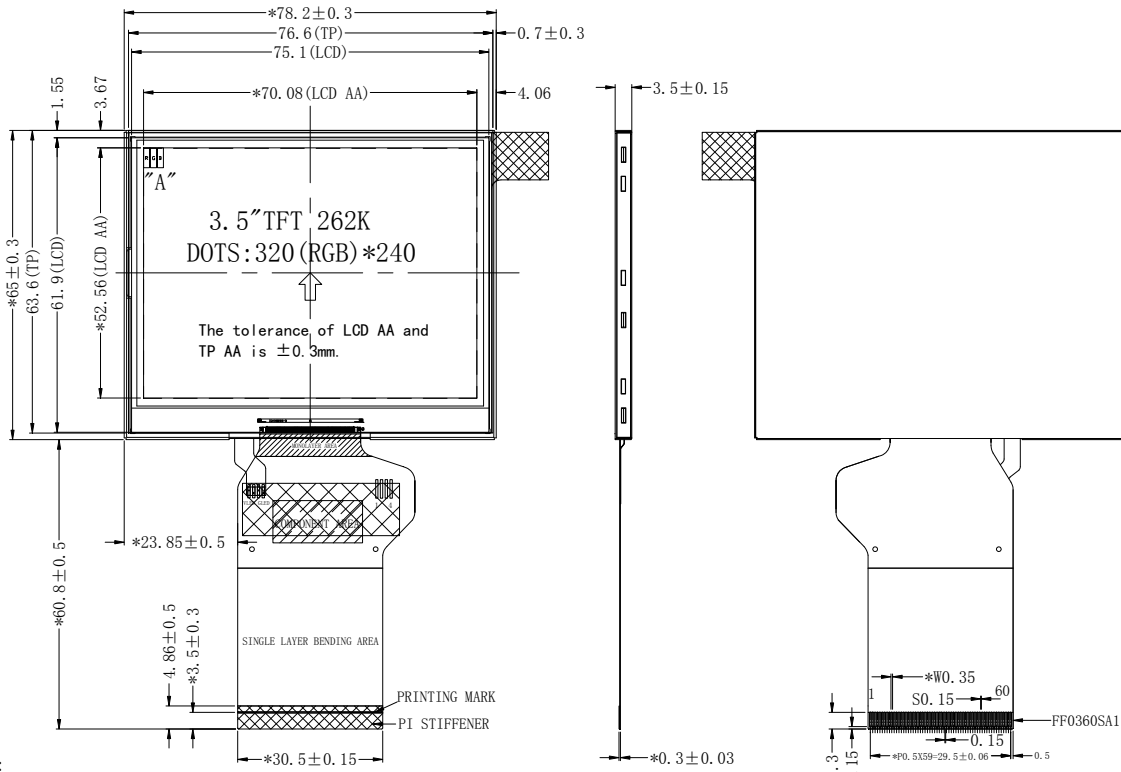

NOTE:

1. DISPLAY TYPE: 3.5" TFT, 262K, TRANSMISSIVE/POSITIVE
2. DRIVER IC: HX8238-D (COG)
3. POLARIZER TYPE: GLARE / WIDE ANGLE
4. LED SERIES: LED X 6 (SERIAL)  
OPERATING CURENT: 20mA/CHIP
5. LUMINANCE: 350cd/m2 MIN
6. OPERATING TEMP: -20° C ~ 70° C
7. STORAGE TEMP: -30° C ~ 80° C
8. UNDEFINE ± 0.2
9. \* : IMPORTANT DIMENSION    △ : MODIFY RECORD
10. PRODUCTS MEET STANDARDS BHS-001



### PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	GLED	GLED	VLED	VLED	GND	NC	NC	NC	NC	GND
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	NC	NC	POL	/RESET	/CS	SCL	SDI	D00	D01	D02
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D03	D04	D05	D06	D07	D08	D09	D10	D11	D12
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	D13	D14	D15	D16	D17	D18	D19	D20	D21	D22
PIN NO	41	42	43	44	45	46	47	48	49	50
SYMBOL	D23	IHS	IVS	CLK	NC	NC	VCC	VCC	NC	NC
PIN NO	51	52	53	54	55	56	57	58	59	60
SYMBOL	NC	NC	NC	NC	NC	NC	NC	DEN	GND	GND