



**EXTERNAL DIMENSION**

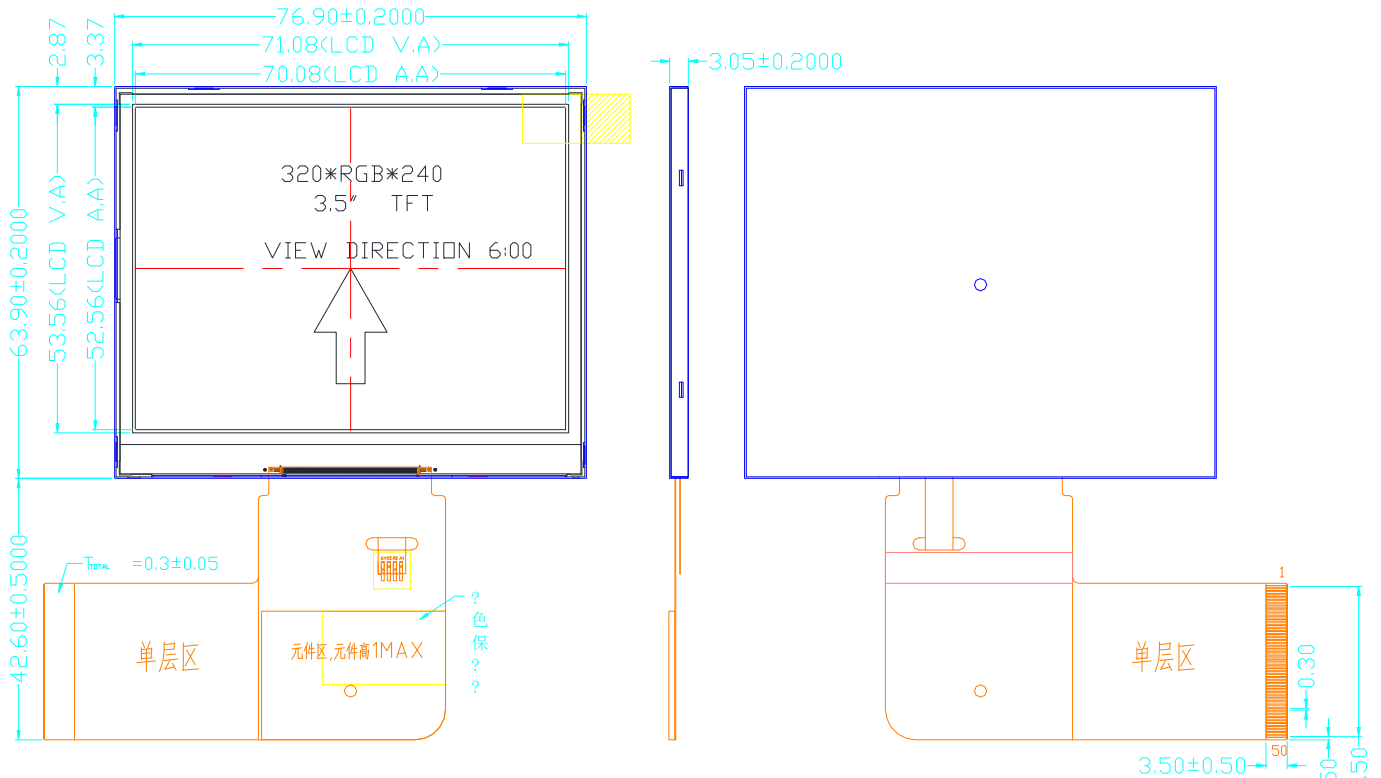

NOTES:

1. DISPLAY TYPE: 3.5 " TFT, TRANSMISSIVE
2. OPERATING TEMPERATURE: -20°C TO 70°C
3. STORAGE TEMPERATURE: -30°C TO 80°C
4. VIEWING DIRECTION : 6:00
5. DRIVE IC: SSD2119M
6. BACKLIGHT: 6 CHIP-WHITE LED, 3 Serial 2 Parallel connection
7. RoHS COMPLIANCY
8. GENERAL TOLERANCE ±0.2
9. MATCH CONNECTOR : FH19SC-50S-0.5SH(HRS)

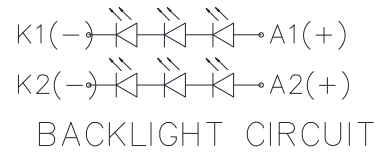

0.50±0.150  
P0.5\*49=24.50

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	GND	NC	NC	GND	GND	GND	RD	SDO	RESET	CS
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	SCL	SDA	RS	WR	PS3	PS2	PS1	PS0	DB17	DB16
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB15	DB14	DB13	DB12	DB11	DB10	DB9	DB8	DB7	DB6
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DB5	DB4	DB3	DB2	DB1	DB0	DEN	VSYNC	HSYNC	DCLK
PIN NO	41	42	43	44	45	46	47	48	49	50
SYMBOL	NC	GND	GND	VDD	VDD	NC	K2	A2	A1	K1