


PT0353248-B2 SERIES

(320*RGB*480 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

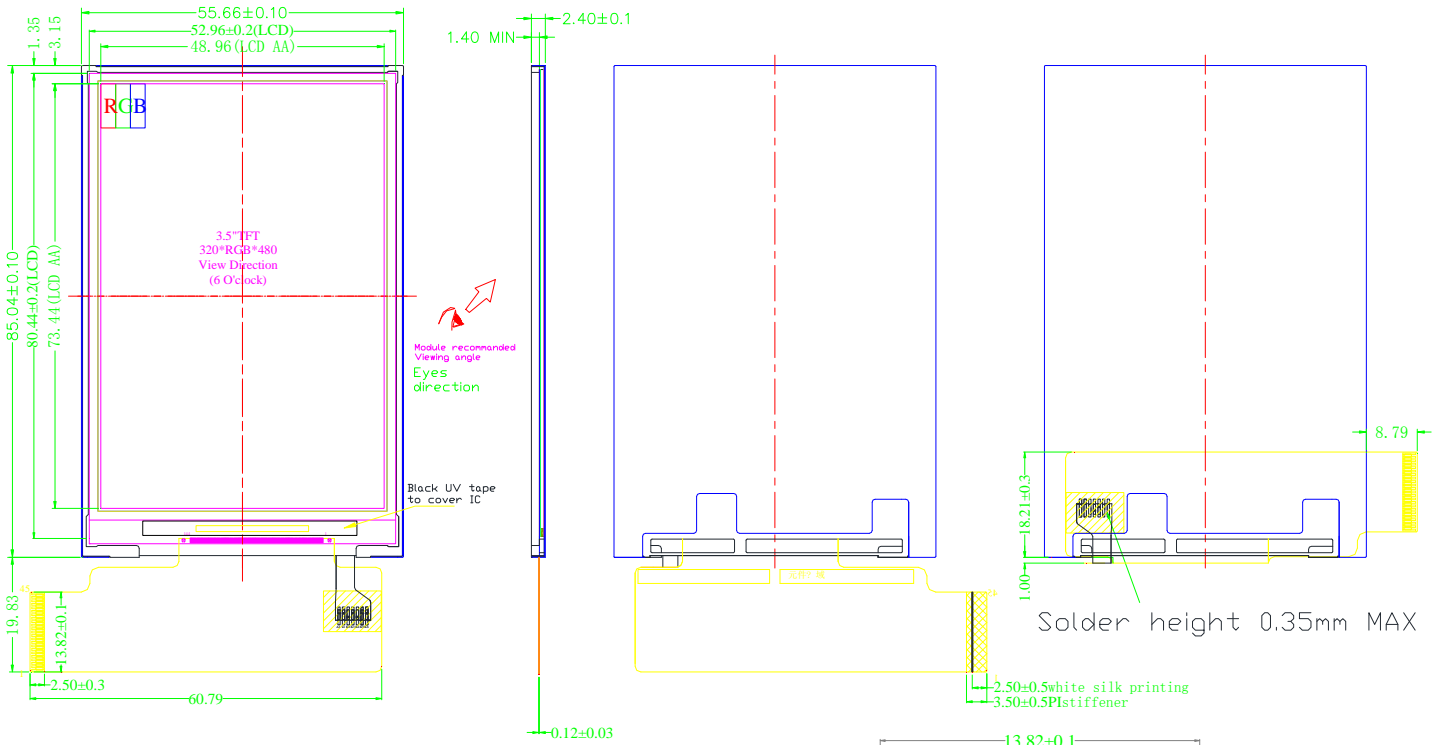

NOTES:

1. DISPLAY TYPE: 3.5" TFT
2. VIEWING DIRECTION: 6:00
3. LCD DRIVE IC: ILI9488
4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
5. OPERATING TEMP: -20° C ~ +70° C
6. STORAGE TEMP: -30° C ~ +80° C
7. UNMARKER TOLERANCE: ±0.20
8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

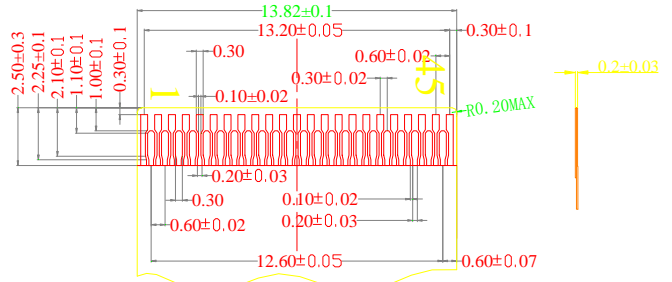

Detail A Scale : 4:1

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	GND	SDO	SDI	CLK	SCL/WRX	D/CX	PCLK	RST	DE
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	RDX	TE	HSYNC	VSYNC	VCC	DB0	DB1	DB2	DB3
PIN NO	19	20	21	22	23	24	25	26	27
SYMBOL	DB4	DB5	DB6	DB7	DB8	DB9	DB10	DB11	DB12
PIN NO	28	29	30	31	32	33	34	35	36
SYMBOL	DB13	DB14	DB15	DB16	DB17	GND	VCCIO	IM0	IM1
PIN NO	37	38	39	40	41	42	43	44	45
SYMBOL	IM2	LEDA	LEDK1	LEDK2	LEDK3	LEDK4	LEDK5	LEDK6	GND