



PT0353248-C6 SERIES

(320*RGB*480 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

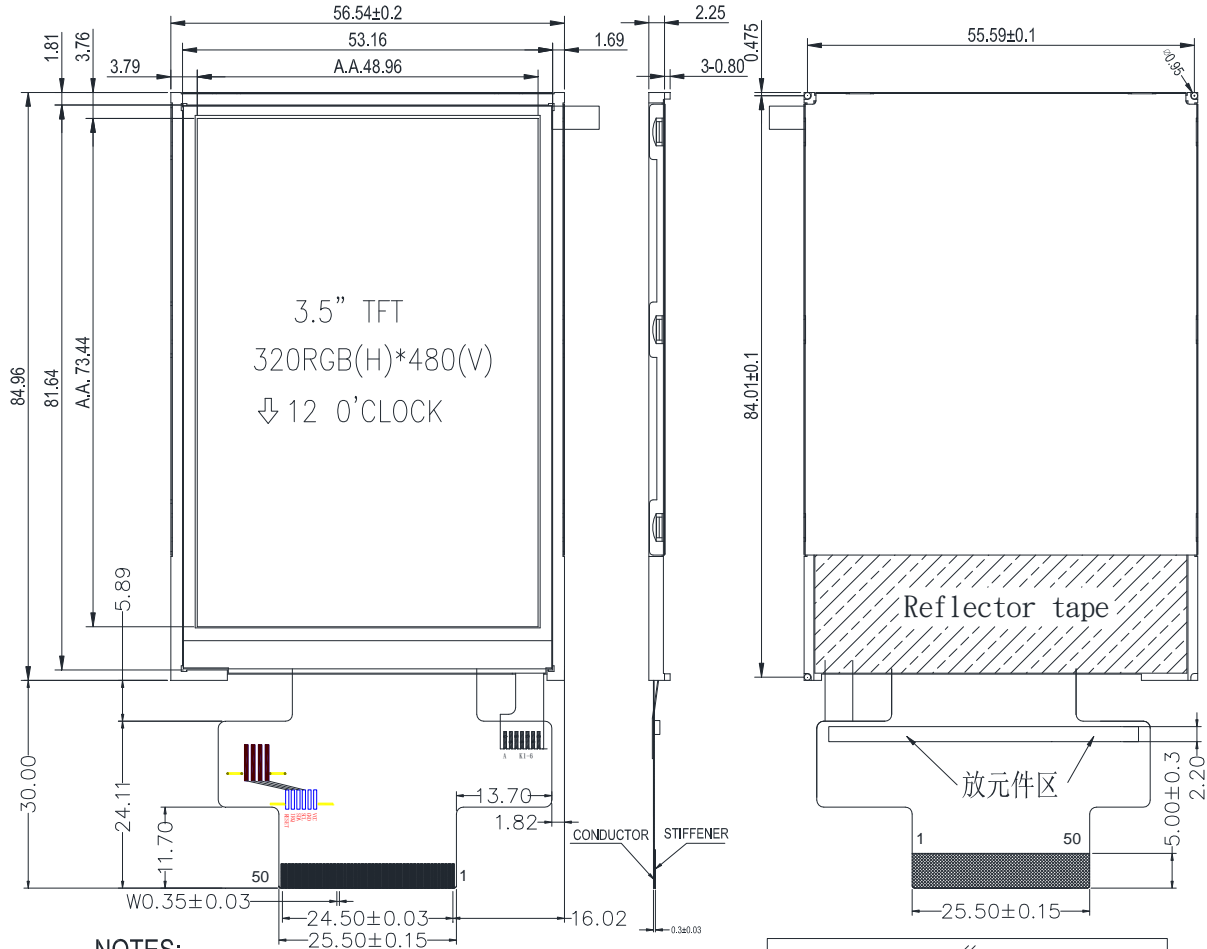

NOTES:

- 1.Display type:262K TFT
- 2.Driver IC:ILI9488
- 3.Operation Voltage:VCI=3.0V,VDDI=3V
- 4.Operating temperature: -20°~+70°
Storage temperature: -30°~+80°
- 5.Backlight:6- LED White
- 6.ROHS
- 7.Undefined tolerance:±0.2

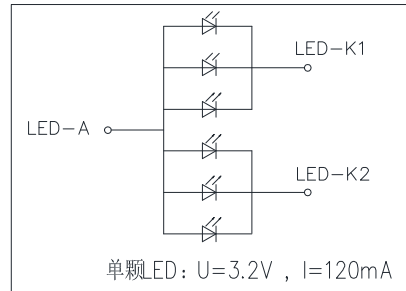

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	LED A	LED K1	LED K2	NC	NC	NC	IM0	IM1	IM2	RESET
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	VSYNC	HSYNC	DOTCLK	DE	DB17	DB16	DB15	DB14	DB13	DB12
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	DB11	DB10	DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2
PIN NO	31	32	33	34	35	36	37	38	39	40
SYMBOL	DB1	DB0	SDO	SDI	RD	WR(D/C)	D/C(SCL)	CS	TE	VDDI
PIN NO	41	42	43	44	45	46	47	48	49	50
SYMBOL	VDDI	VCI	GND	XR	YD	XL	YU	GND	GND	GND