





**EXTERNAL DIMENSION**

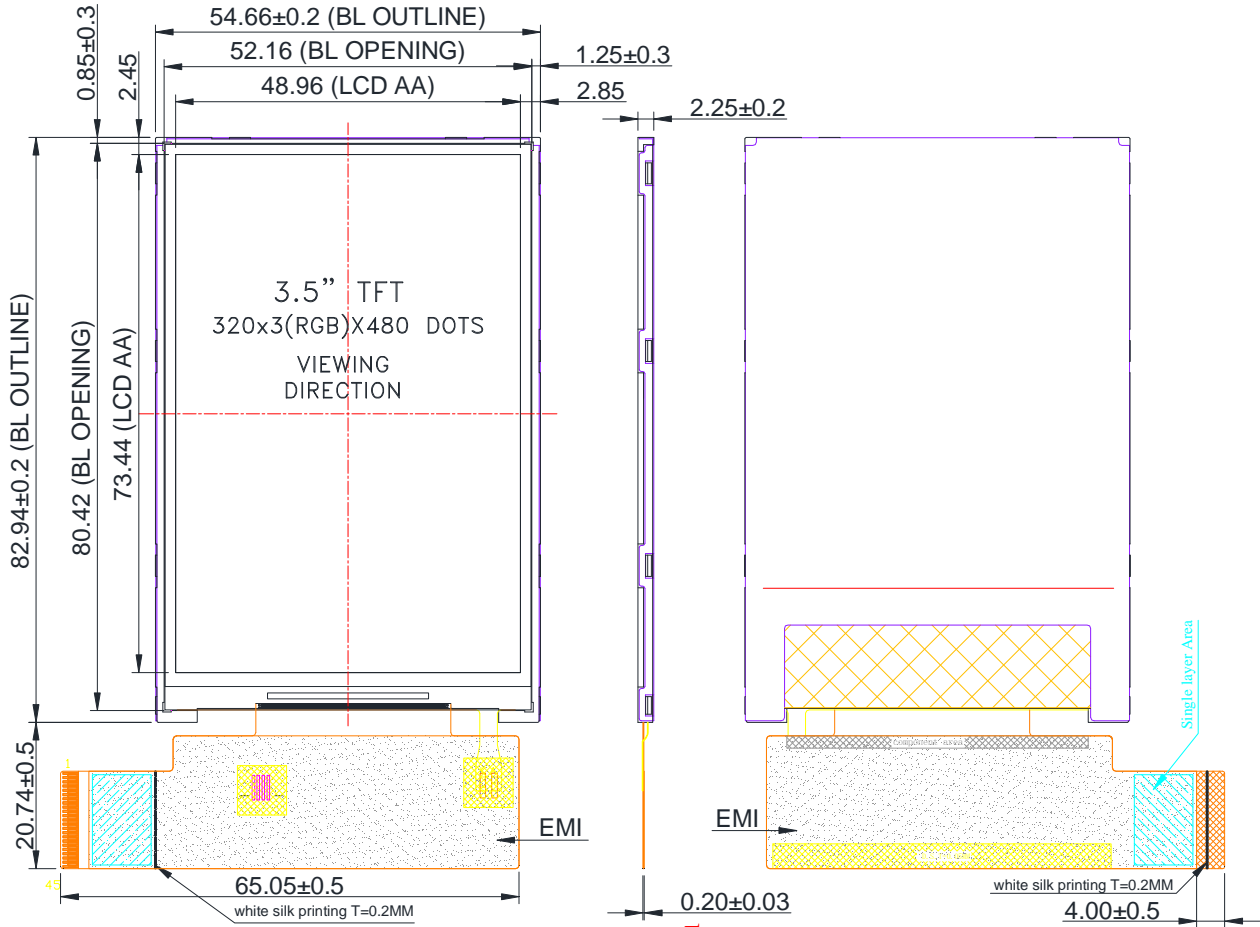

NOTES:

1. DISPLAY TYPE: 3.5" TFT
2. VIEWING DIRECTION: ALL
3. LCD DRIVE IC: HX8357D
4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
5. OPERATING TEMP: -20° C ~ +70° C
6. STORAGE TEMP: -30° C ~ +80° C
7. UNMARKER TOLERANCE: ±0.20

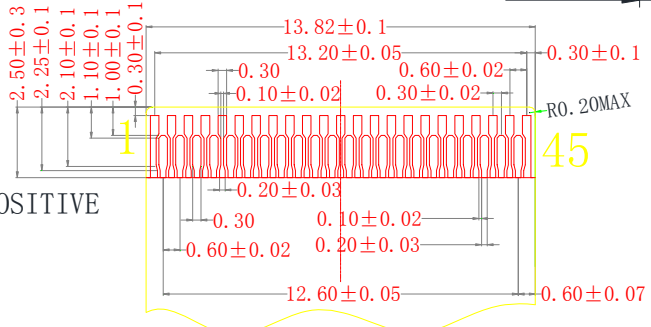

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	GND	LEDA	LEDA	LEDK	LEDK	GND	GND	VCC	IOVCC
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	RESET	VSYNC	HSYNC	GND	DOTCLK	DNG	DE	D17	D16
PIN NO	19	20	21	22	23	24	25	26	27
SYMBOL	D15	D14	D13	D12	D11	D10	D9	D8	D7
PIN NO	28	29	30	31	32	33	34	35	36
SYMBOL	D6	D5	D4	D3	D2	D1	D0	SDO	SDI
PIN NO	37	38	39	40	41	42	43	44	45
SYMBOL	RDX	WRX/SCL	D/CX	CSX	TE	XR	YD	XL	YU