



EXTERNAL DIMENSION

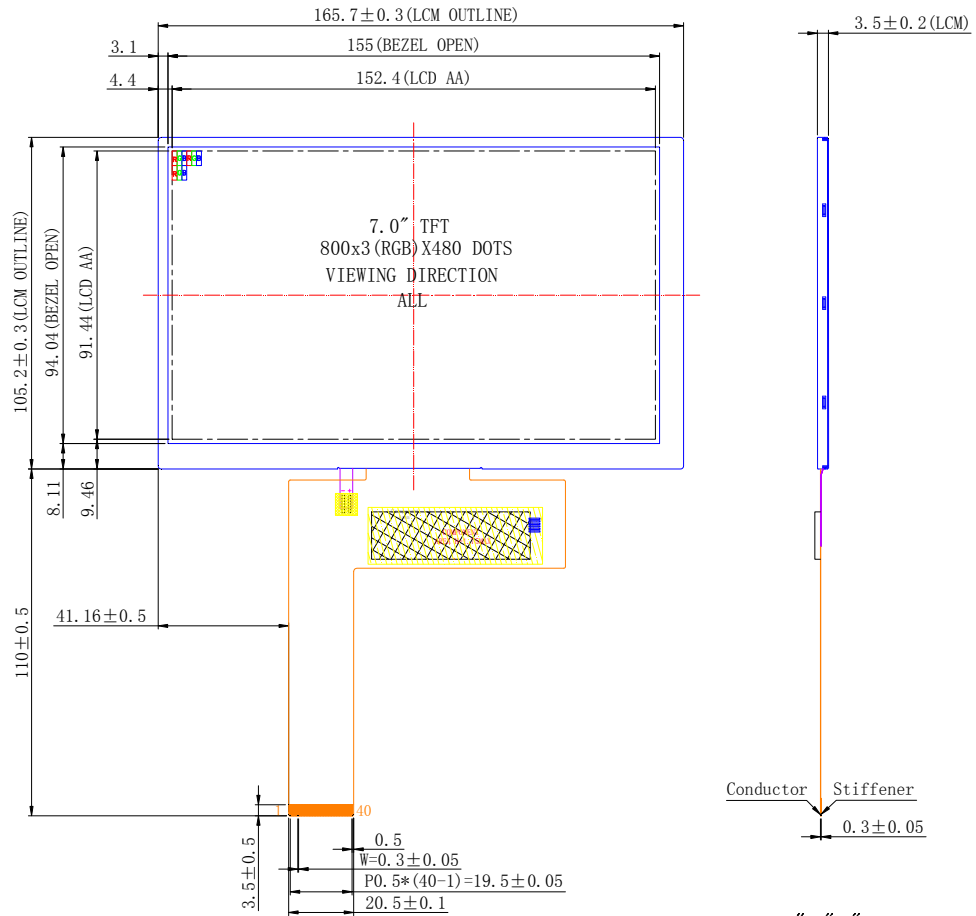

TFT NOTE:

- 1, VIEWING DIRECTION: ALL
- 2, DRIVER IC: RM533C0/RM577C1
- 3, BACKLIGHT: WHITE LED 27 connection
- 4, OPERATING TEMP.: -30° ~ 80°
- 5, STORAGE TEMP.: -30° ~ 85°
- 6, LED LIFETIME 50K HRS
7. IRON FRAME: SUS201



VF=9.9V(Typ), IF=180mA(Fix)
450nits(Min), 500nits(Typ)

PIN CONNECTIONS

PINNO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	VDD	VDD	NC	RESET	STBYB	GND	RXIN0-	RXIN0+	GND
PINNO	11	12	13	14	15	16	17	18	19	20
SYMBOL	RXIN1-	RXIN1+	GND	RXIN2-	RXIN2+	GND	RXCLKIN-	RXCLKIN+	GND	RXIN3-
PINNO	21	22	23	24	25	26	27	28	29	30
SYMBOL	RXIN3+	GND	NC	NC	GND	NC	NC	SELB(HSD)	NC	GND
PINNO	31	32	33	34	35	36	37	38	39	40
SYMBOL	LED-	LED-	L/R	UD	NC	NC	NC	NC	LED+	LED+