


**EXTERNAL DIMENSION**

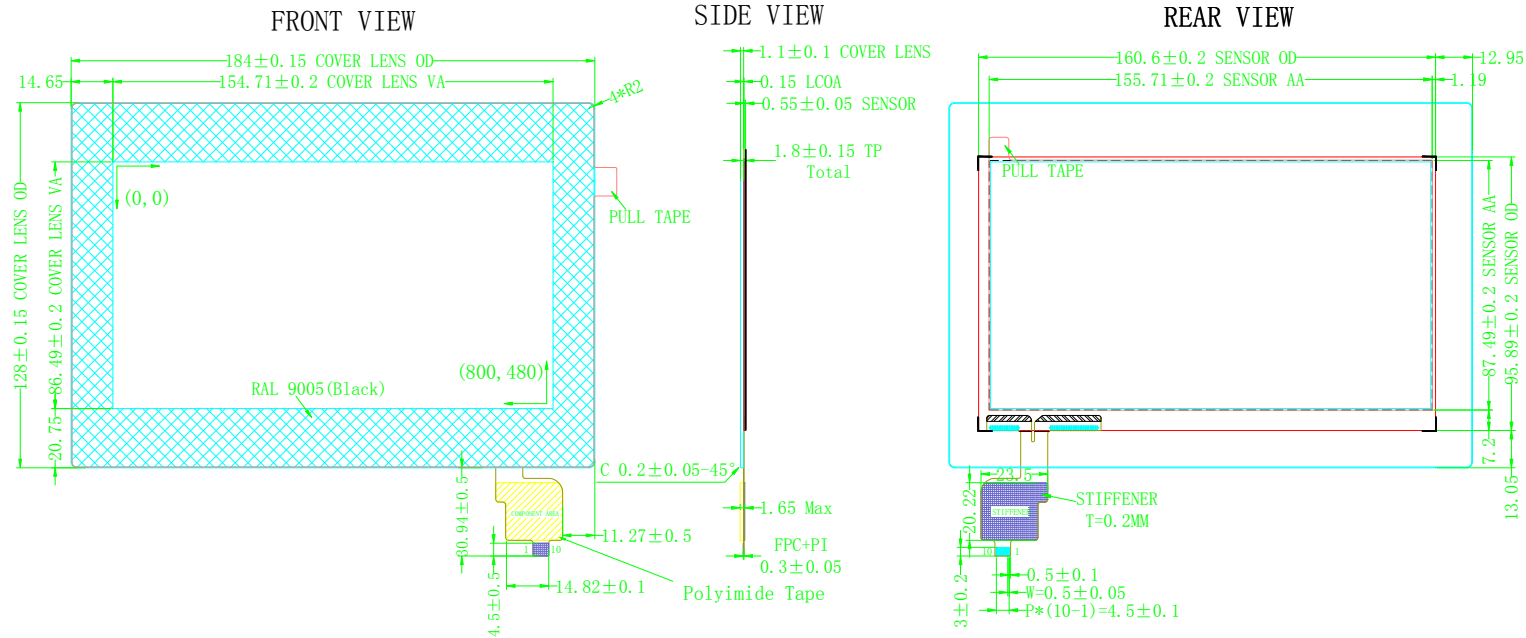

CTP SPECIFICATION			
CTP	G+G	CTP transparency	≥86%
FPC type	COF	Hardness	≥6H
LCM Resol	800*480	Coordinate	Left-Top
DRIVER IC	FT5426	Apply Volt	3.3V
I/O Volt	3.3V	Interface	IIC
IIC addr	0X70	IIC Freq	400Kbps
Report Frq	60HZ	INT Trigger	Falling Edge
Storage Temp	-30°C TO 80°C	Operating Temp	-20°C TO 70°C
Undefined Tol	±0.2		

**PIN CONNECTIONS**

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	NC	NC	NC	GND	VDD	INT	RST	SCL	SDA