


EXTERNAL DIMENSION

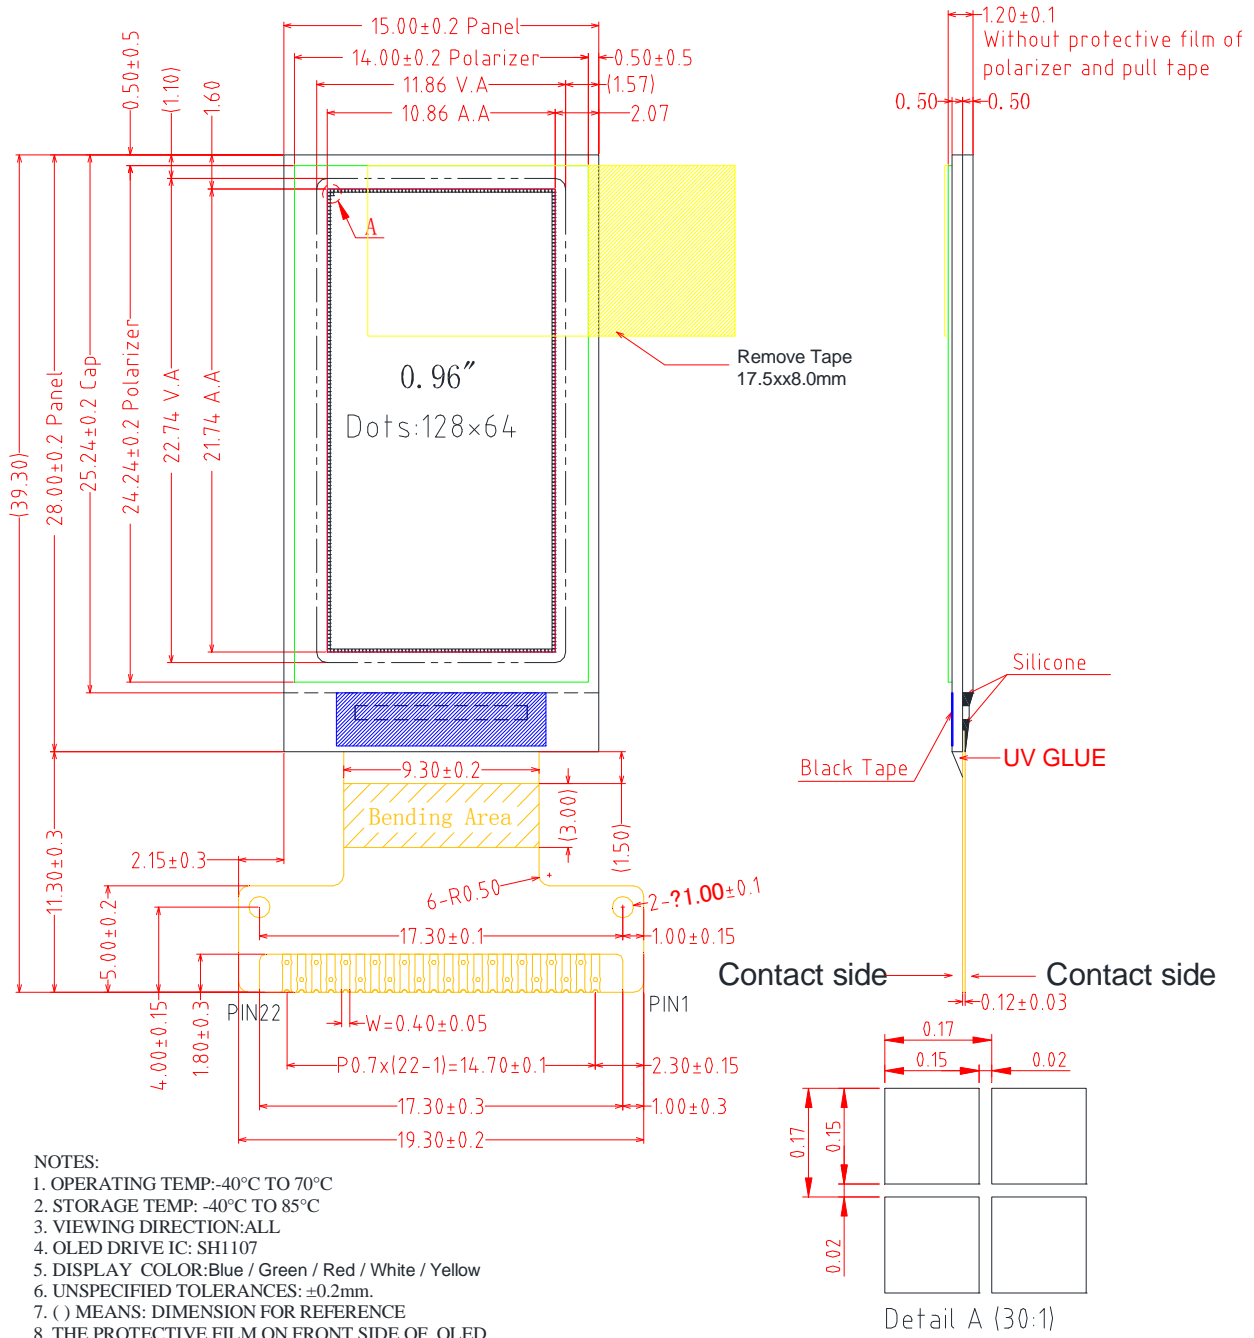

- NOTES:
1. OPERATING TEMP:-40°C TO 70°C
  2. STORAGE TEMP: -40°C TO 85°C
  3. VIEWING DIRECTION:ALL
  4. OLED DRIVE IC: SH1107
  5. DISPLAY COLOR:Blue / Green / Red / White / Yellow
  6. UNSPECIFIED TOLERANCES: ±0.2mm.
  7. ( ) MEANS: DIMENSION FOR REFERENCE
  8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	NC	VSS	D7	D6	D5	D4	D3	D2
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	D1	D0	/RD	/WR	A0	/RES	/CS	IREF
PIN NO	17	18	19	20	21	22		
SYMBOL	IM2	IM1	NC	VDD	VCOMH	VPP		