



PTOG0906□-A0 SERIES (96 * 64 DOTS)




魔誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

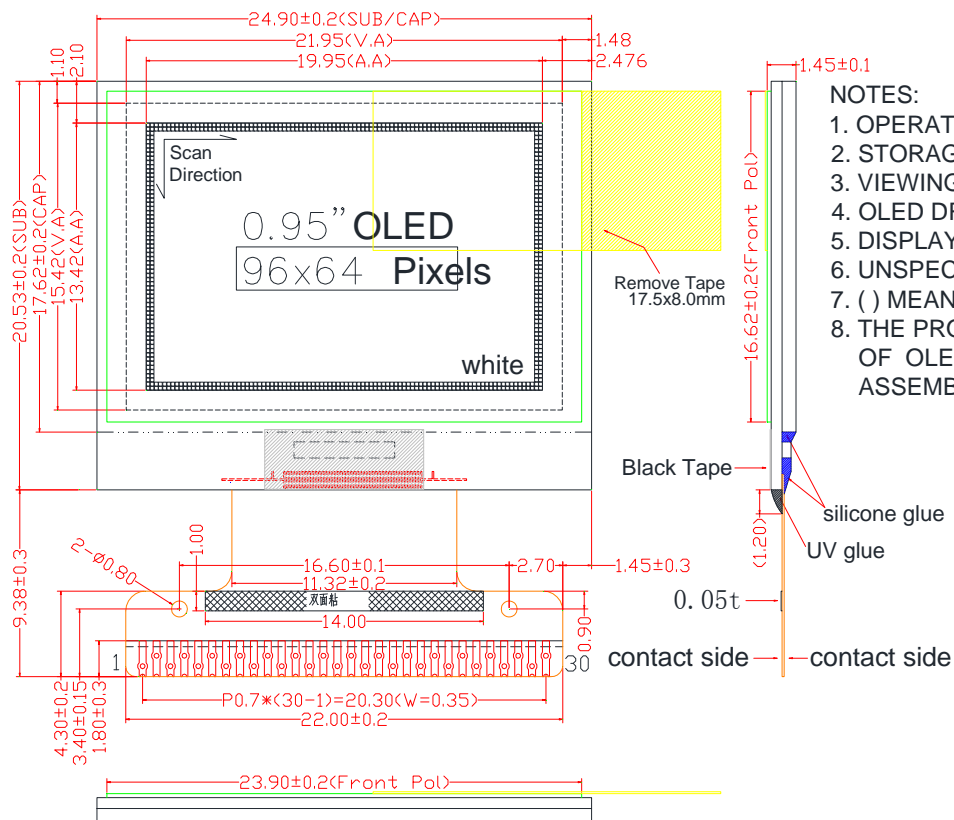

- NOTES:
1. OPERATING TEMP: -30°C TO 80°C
 2. STORAGE TEMP: -40°C TO 85°C
 3. VIEWING DIRECTION: ALL
 4. OLED DRIVE IC: SH1106G
 5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	C1N	C1P	C2P	C2N	VDD1	NC	GND	VDD2	IM0
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	IM1	IM2	CS#	RES#	A0	WR#	RD#	D0	D1	D2
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D3	D4	D5	D6	D7	IREF	VCOMH	VPP	GND	NC