


EXTERNAL DIMENSION

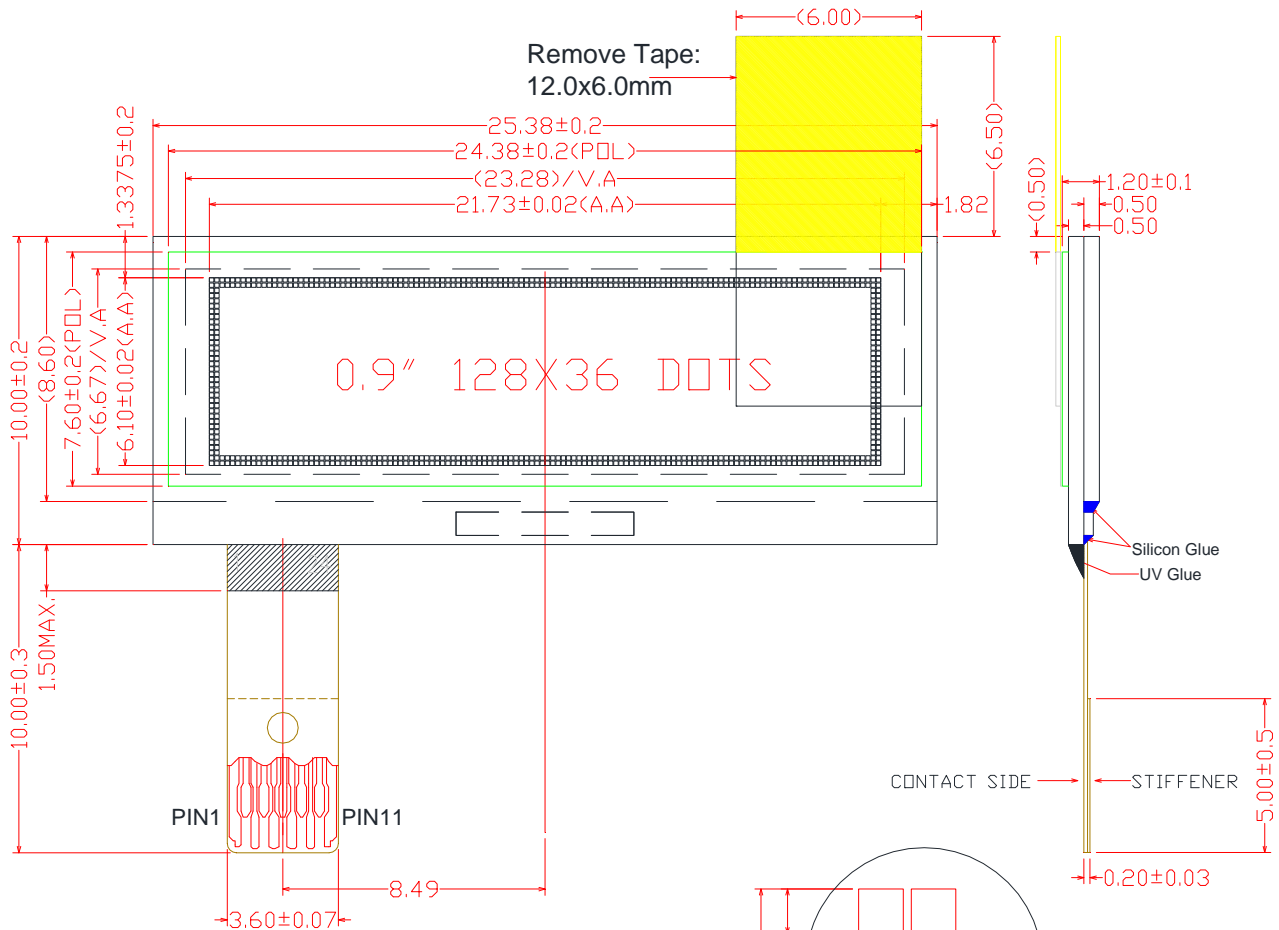

NOTES:

1. OPERATING TEMP: **-20°C TO 75 °C**
2. STORAGE TEMP: **-40°C TO 85 °C**
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: **LD7032**
5. DISPLAY MODE: **White**
6. UNSPECIFIED TOLERANCES: $\pm 0.2\text{mm}$.
7. * MEANS CRITICAL DIMENSION
8. () MEANS: DIMENSION FOR REFERENCE
9. THE PROTECTIVE FILM OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6
SYMBOL	IXS	SCLK	SDIN	DC	CSB	RSTB
PIN NO	7	8	9	10	11	
SYMBOL	VDD	IREF	VCC	VCC	GND	