


EXTERNAL DIMENSION

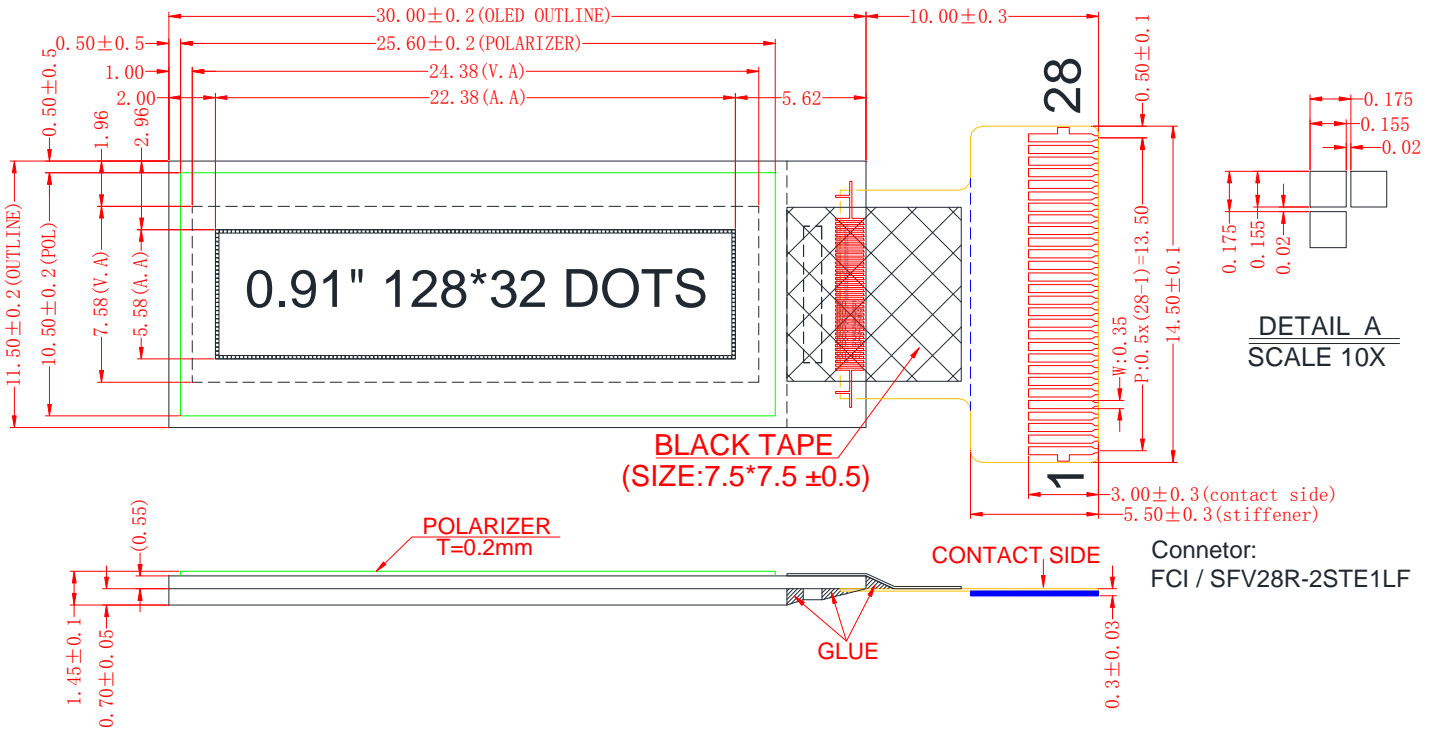

NOTES:

1. OPERATING TEMP: -20°C TO 70°C
2. STORAGE TEMP: -30°C TO 80°C
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: SH1103G
5. DISPLAY COLOR: Blue / Green / Red / White / Yellow

6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILMS ON BOTH SIDES OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7
SYMBOL	NC	VCOMH	VPP	IREF	VDD2	C1N	C1P
PIN NO	8	9	10	11	12	13	14
SYMBOL	C2P	C2N	GND	VBREF	C86	P/S	VDD1
PIN NO	15	16	17	18	19	20	21
SYMBOL	/CS	/RES	A0	/WR	/RD	D0	D1
PIN NO	22	23	24	25	26	27	28
SYMBOL	D2	D3	D4	D5	D6	D7	NC