



EXTERNAL DIMENSION

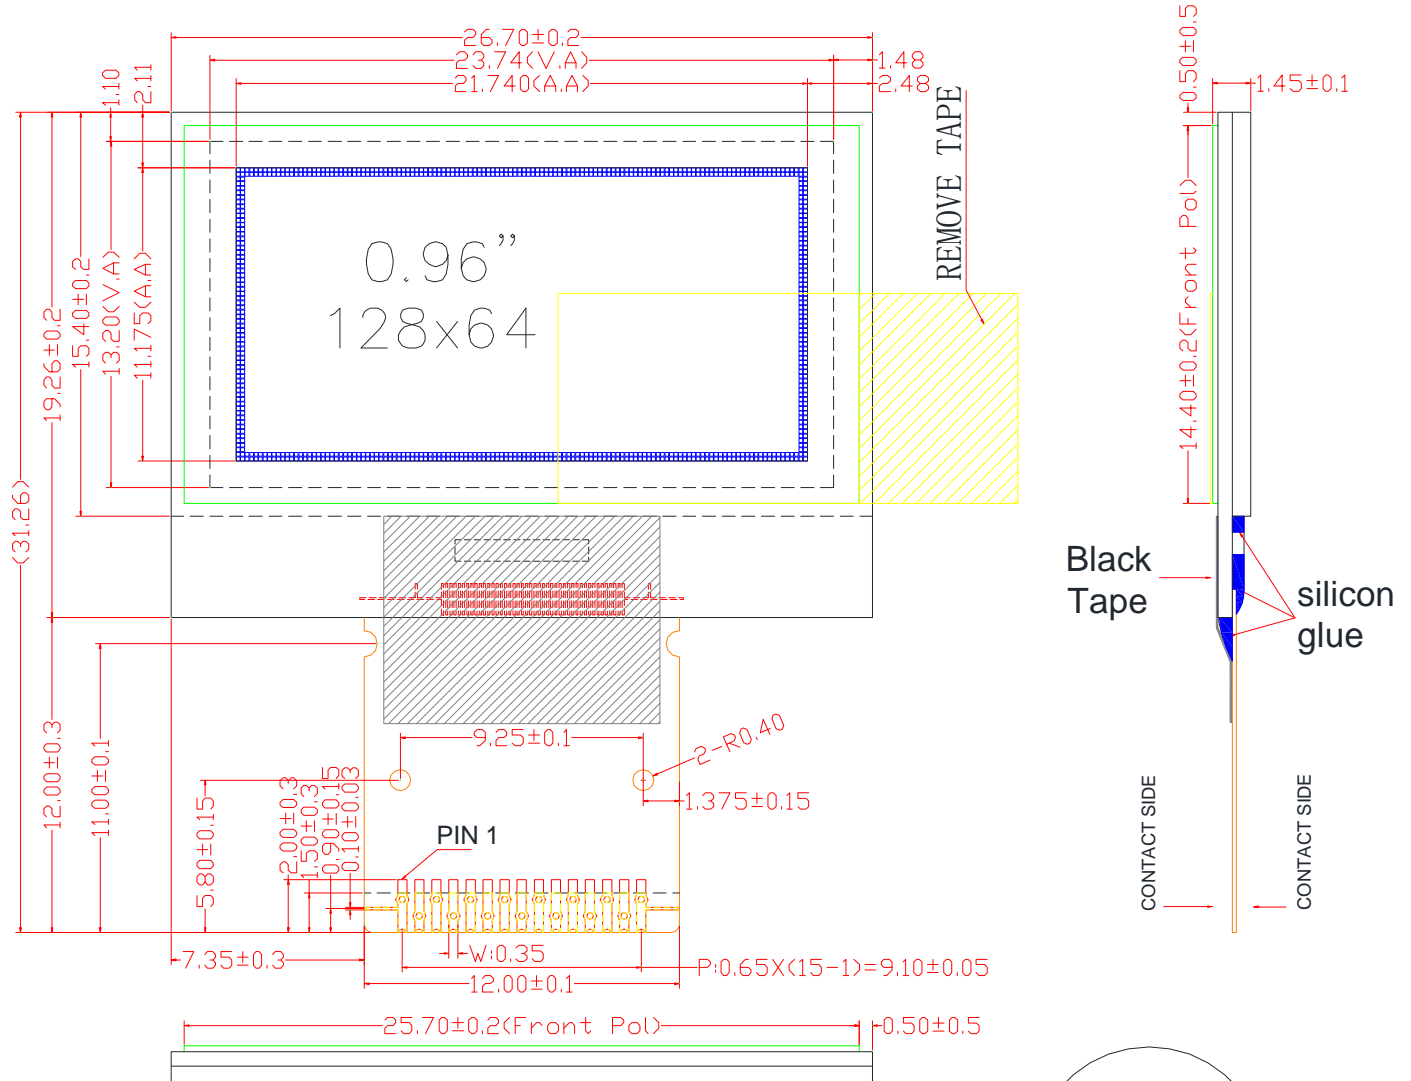

NOTES:

1. OPERATING TEMP:-40°C TO 70°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SH1106G
5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILMS ON BOTH SIDES OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail
Scale 10X

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	C1P	C1N	C2P	C2N	VDD2	VSS	VDD1	CSB
PIN NO	9	10	11	12	13	14	15	
SYMBOL	RESB	A0	SCL	SI	IREF	VOMH	VPP	